


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

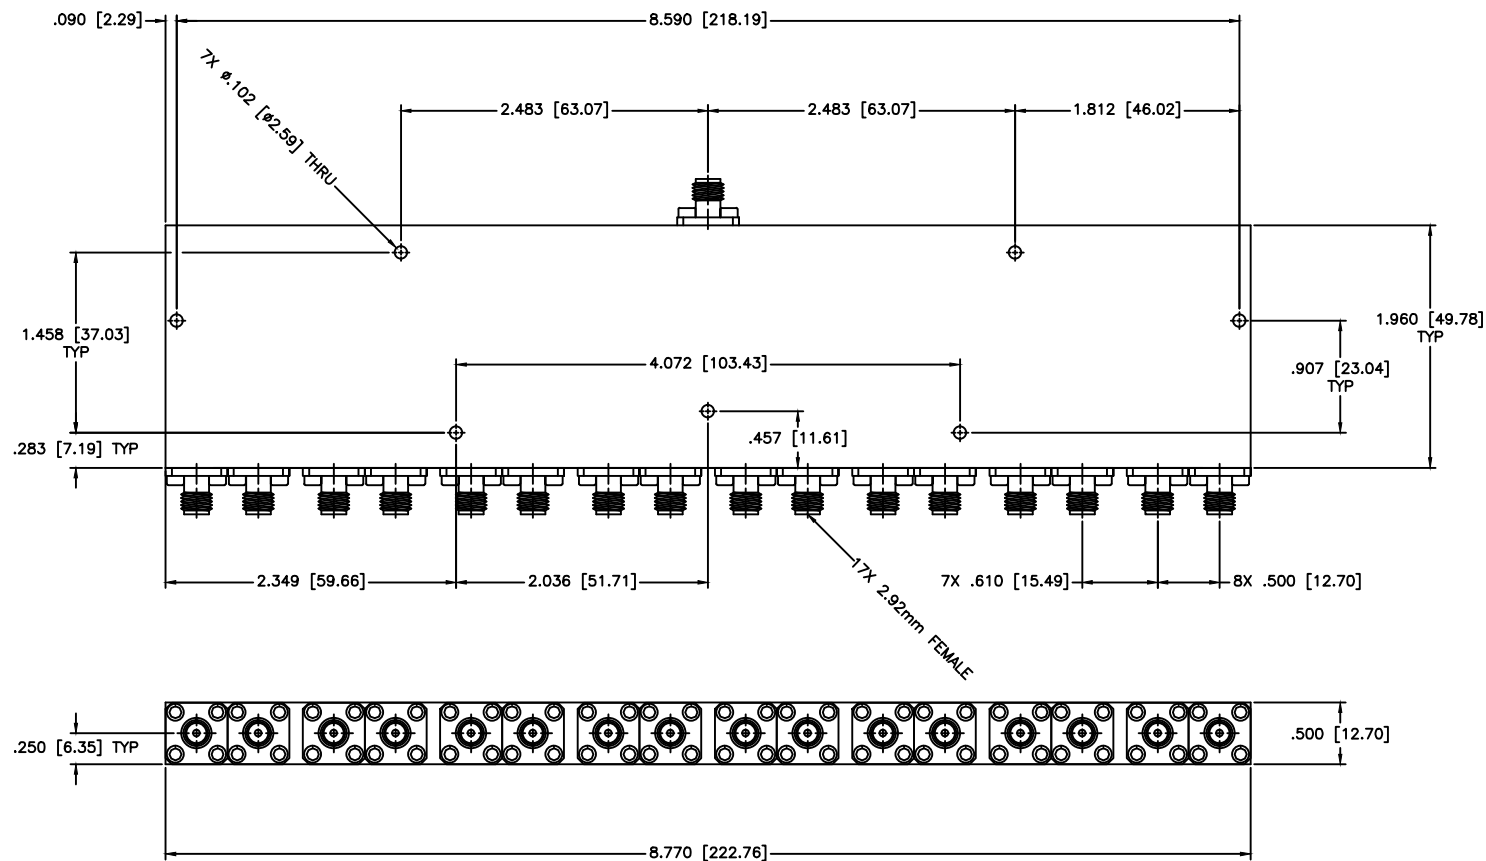

SPECIFICATIONS

Frequency Range: 6–26.5 GHz
 Insertion Loss: 6.5dB Max.
 Isolation: 14dB Min.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 1.10 dB Max.
 VSWR IN/OUT: 1.70:1/1.70:1 Max.
 Power Rating: 30W Avg, 3kW Peak
 Operational Temperature: -32° to $+85^{\circ}$ C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A					
				SHEET:		N/A					
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		DRAWING TITLE:							
				16-WAY POWER DIVIDER							
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.							
				PS16-23							
DRAWN: Paiboon Luekhamhan		DATE: 07-11-2011		CAGE CODE:		SIZE: N/A		REV: N/A		DWG NO.	
APPROVED: T. Nguyen		DATE: 07-11-2011		THIRD ANGLE PROJECTION 		OD2L5		DO NOT SCALE THE DRAWING		86495	