

Double-Balanced Mixer

Rev. V3

Features

- LO 10 TO 1600 MHz
- RF 10 TO 1500 MHz
- IF 0 TO 600 MHz
- LO DRIVE: +20 dBm (NOMINAL)
- HIGH INTERCEPT POINT: +30 dBm TYP. (UPCONV.)
+24 dBm TYP. (DOWNCONV.)

Description

The M9H is a double balanced mixer, designed for use in military, commercial, and test equipment applications. The design utilizes Schottky ring quad diodes and broadband ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. Environmental screening is available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Ordering Information

Product Image



Ordering Information

Part Number	Package
M9H	TO-8
M9HC	SMA Connectorized

Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +20$ dBm (Downconverter Application only)


Parameter	Test Conditions	Units	Typical	Guaranteed	
			25°C	0° to 50°C	-54° to +85°C
SSB Conversion Loss & SSB Noise Figure (max)	fR=0.02 to 0.4 GHz, fL=0.01 to 0.6 GHz, fI=0.002 to 0.2GHz fR=0.01 to 1.5 GHz, fL=0.01 to 1.6 GHz, fI=0.001 to 0.6GHz fI=0.002 to 0.2 GHz fI=0.001 to 0.6 GHz	dB	7.0 8.0 8.5 9.0	8.0 9.0 9.0 9.5	8.3 9.3 9.3 9.8
Isolation, L to R (min)	fL = 0.01 to 0.4 GHz fL = 0.4 to 1 GHz fL = 1 to 1.5 GHz	dB	35 30 22	28 23 20	27 22 19
Isolation, L to I (min)	fL = 0.01 to 0.4 GHz fL = 0.4 to 1 GHz fL = 1 to 1.5 GHz	dB	40 22 18	28 16 13	27 15 12
Isolation, R to I (min)	fL = 0.01 to 1 GHz fL = 1 to 1.5 GHz	dB	20 10		
1 dB Conversion Compression	fL @ +20 dBm	dBm	+15		
Input IP3		dBm	+30 +24		

Double-Balanced Mixer


Rev. V3

Typical Performance Curves


Conversion Loss vs. LO Drive

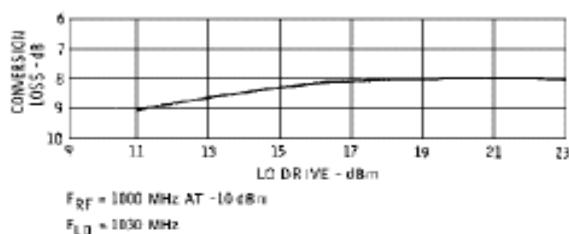




Upconversion Loss vs. Frequency

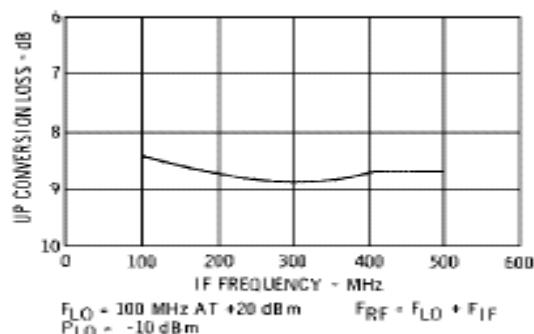


Conversion Loss vs. Frequency

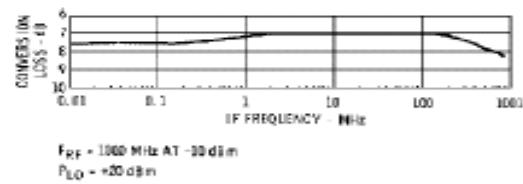

Isolation vs. Frequency

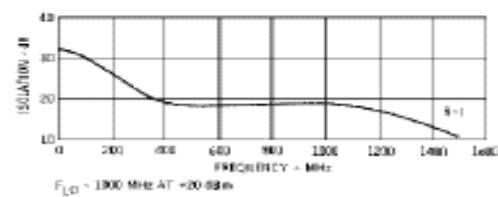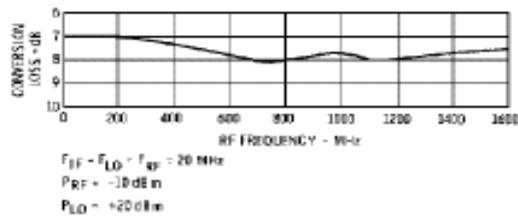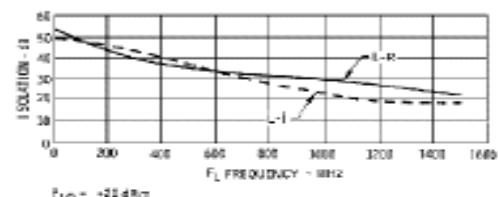

VSWR

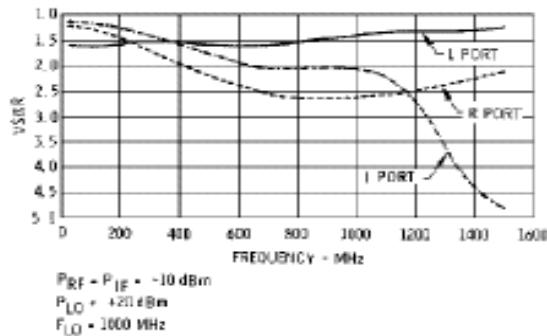

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266
- **India** Tel: +91.80.4155721
- **Europe** Tel: +353.21.244.6400
- **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


Double-Balanced Mixer

Rev. V3

Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+23 dBm max @ +25°C dBm max @ +100°C
Peak Input Current	100 mA DC

Outline Drawing: TO-8

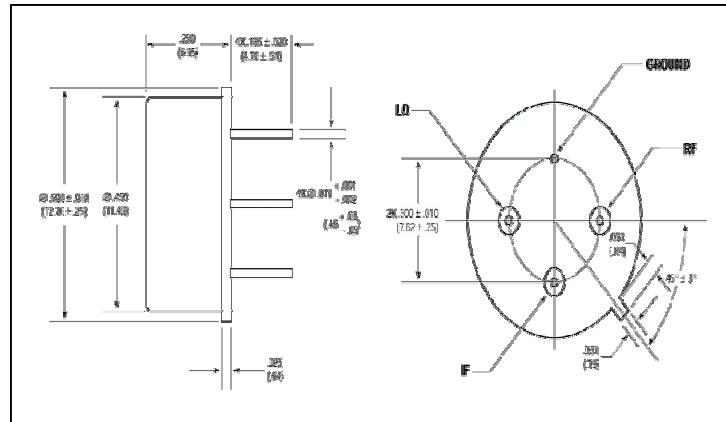

Outline Drawing: SMA Connectorized

