


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

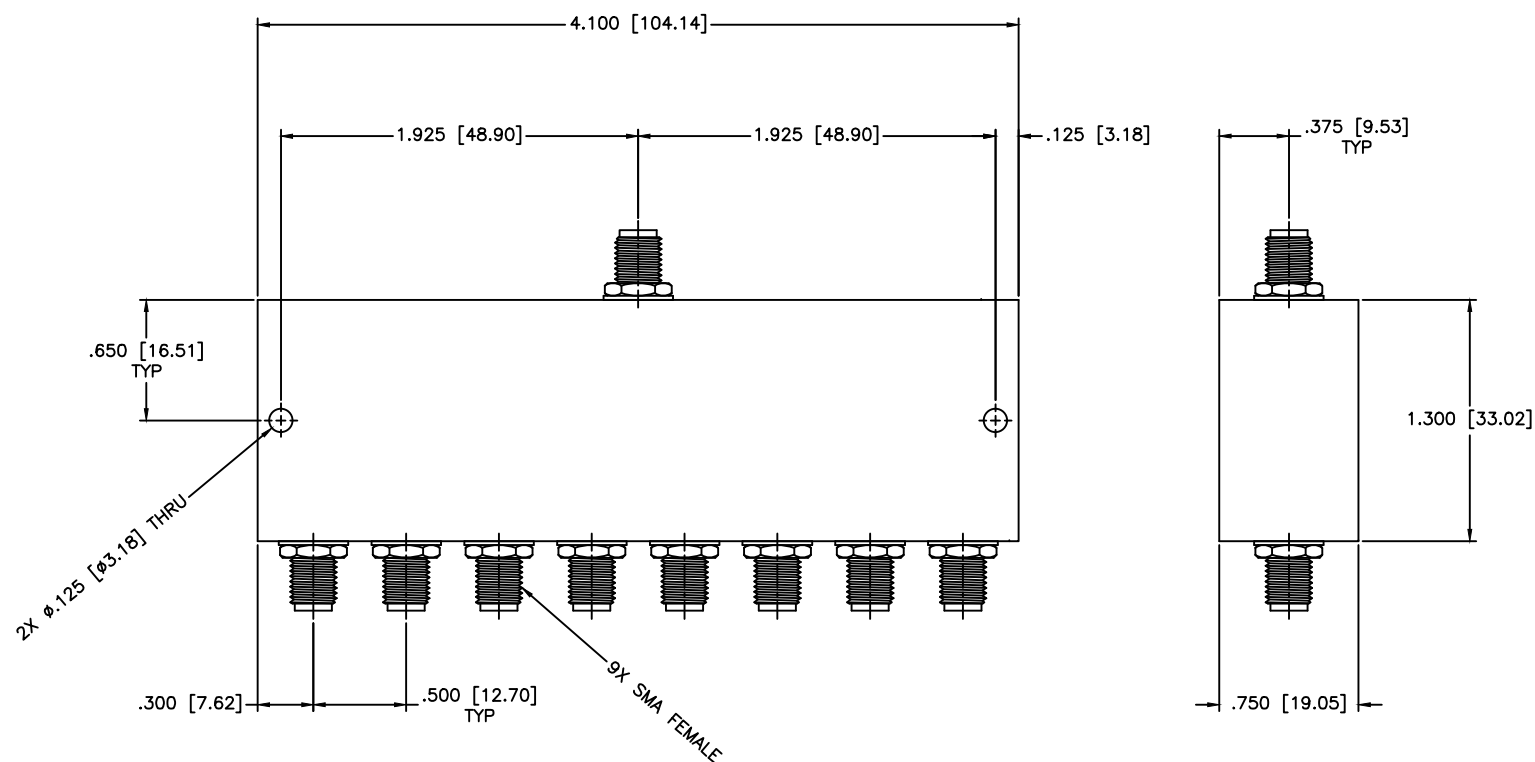

SPECIFICATIONS

FREQUENCY RANGE: 40–200 MHz
 INSERTION LOSS: 1.9dB Max.
 ISOLATION: 20dB Min.
 AMPLITUDE BALANCE: ± 0.2 dB Max.
 PHASE BALANCE: ± 7 Deg. Max.
 VSWR: 1.40:1 Max.
 POWER: 1 Watt Max.

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01$ $\pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 01-06-1998		DRAWING TITLE: 8-WAY POWER DIVIDERS		
APPROVED: T. Nguyen DATE: 01-06-1998		PART NO.: PL8-31		
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: A DO NOT SCALE THE DRAWING	REV: N/A DWG NO.: 80831