


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-50 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL: KOVAR
PLATING: Au PER MIL-G-45204
FORCE TO ENGAGE: 4 LBS MAX
FORCE TO DISENGAGE: 2.5LBS MIN
ROHS COMPLIANT

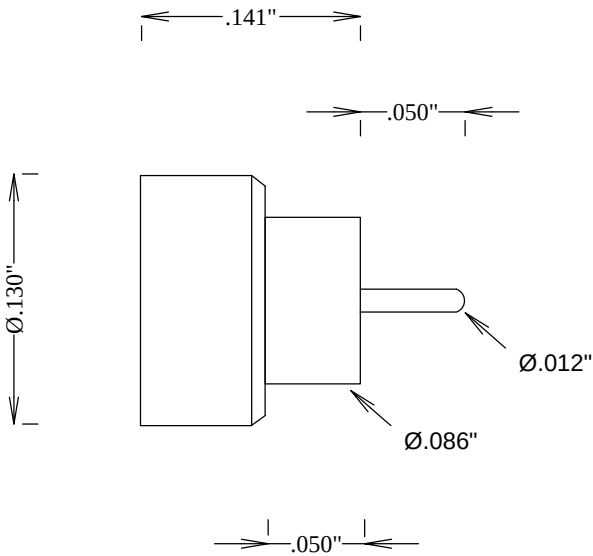

	S. M. ELECTRONICS L.L.C.			
	FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
	TITLE			
	MINISMP MALE FULL DETENTE HERMETIC SHROUD			
	SIZE	CAGE CODE	DWG NO	REV
	A	3FKR5	SC5481	--
	SCALE			SHEET