

Surface Mount Low Pass Filter

SALF-325+
SALF-325

50Ω DC to 325 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input	0.5W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7


Outline Drawing

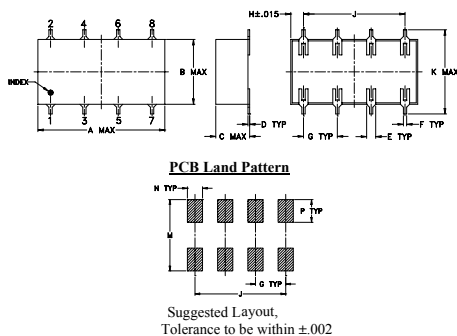

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

Demo Board MCL P/N: TB-187+ Suggested PCB Layout (PL-049)

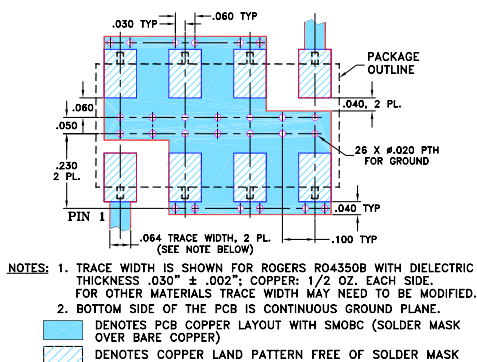

Features

- 7-section elliptic function
- excellent rejection

Applications

- defense communications
- receivers/transmitters
- harmonic rejection of VCOs



CASE STYLE: YY101
PRICE: \$6.95 ea. QTY (1-9)


+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.


Electrical Specifications

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC-325	—	—	1.0 dB
	Freq. Cut-Off	F2	383	—	3.0	dB
	VSWR	DC-F1	DC-325	—	1.3	:1
Stop Band	Rejection Loss	F3-F4	480-580	20	—	dB
		F4-F5	580-1250	40	—	dB
	VSWR	F3-F5	480-1250	—	18	:1

Typical Frequency Response




Electrical Schematic




Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)
	$\bar{x}$	σ	
1	0.03	0.00	49.25
100	0.14	0.00	24.56
200	0.25	0.00	24.79
325	0.53	0.01	32.09
383	2.48	0.15	6.52
450	20.40	0.39	0.41
480	28.51	0.42	0.33
540	40.90	0.45	0.23
580	45.61	0.44	0.22
650	47.49	0.43	0.23
775	45.50	0.45	0.18
900	44.43	0.49	0.20
1150	48.25	1.01	0.19
1240	61.59	3.99	0.19
1300	50.26	1.97	0.20
1400	35.73	0.73	0.22
1500	25.20	0.88	0.30
1700	19.14	0.76	0.37
2000	34.41	0.57	0.38

SALF-325 INSERTION LOSS

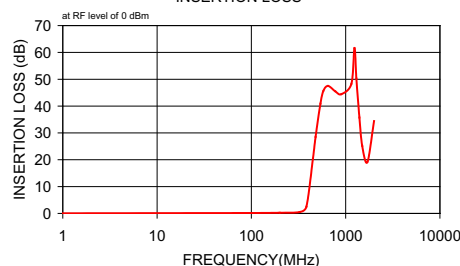

SALF-325 RETURN LOSS

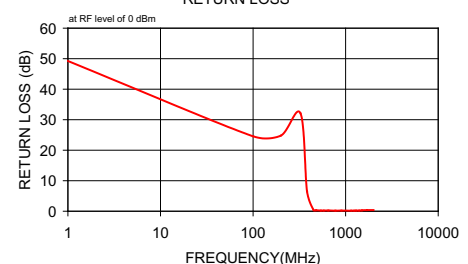

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M111708
SALF-325
100112