
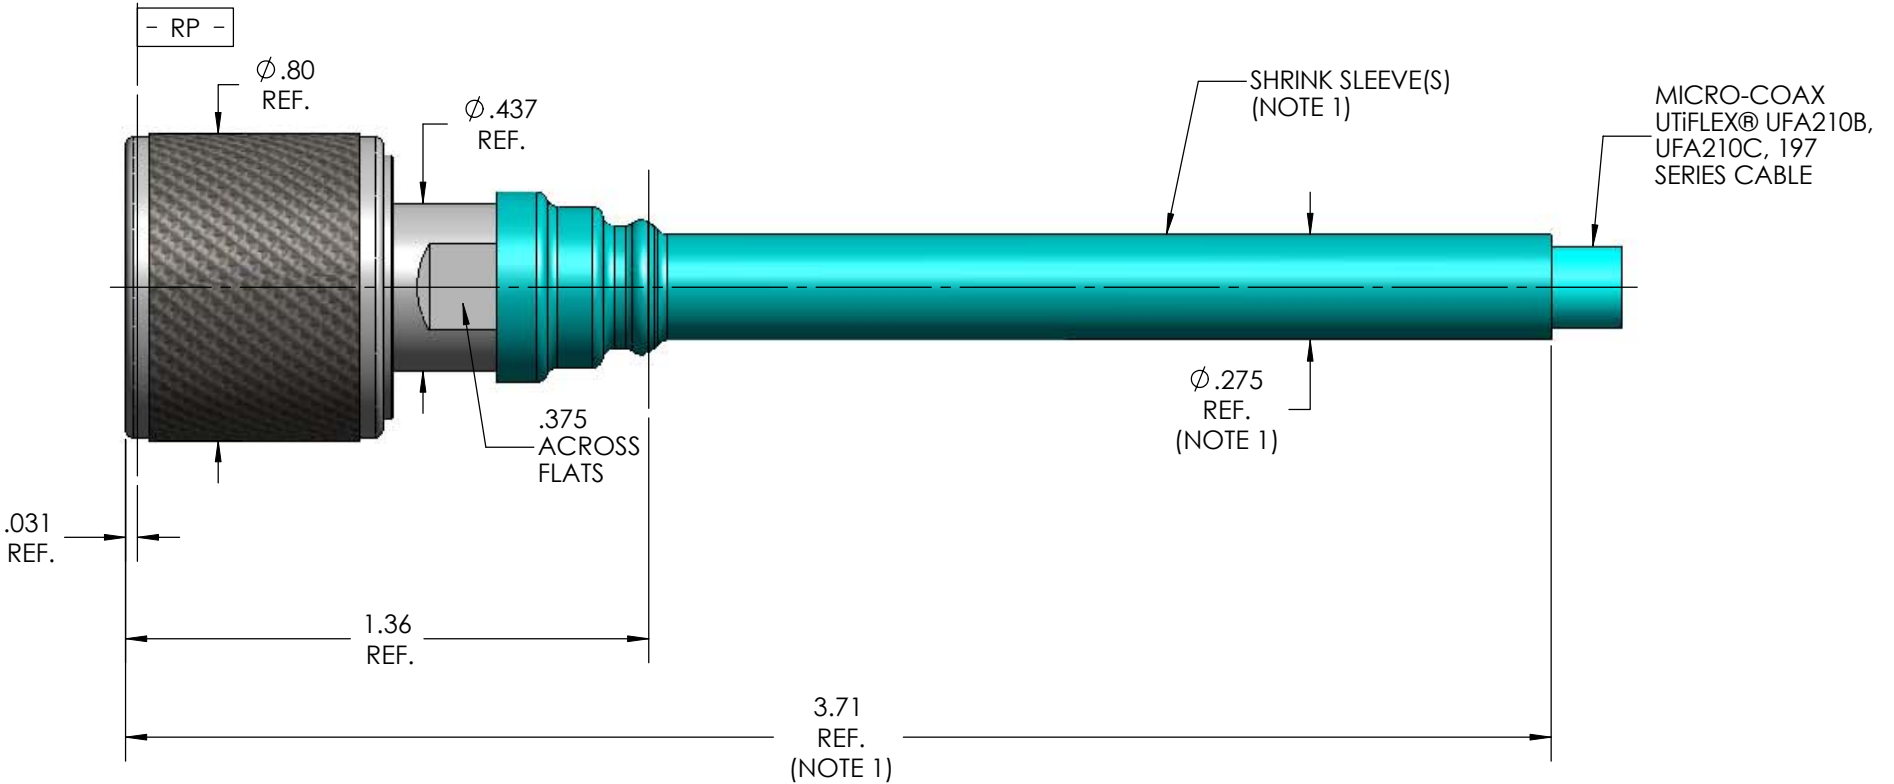


MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 402.1
SLANT SHEET	MIL-PRF-39012/1 REF.
RECOMMENDED MATING TORQUE	20 IN-LBS. NOM.
COUPLING PROOF TORQUE	25 IN-LBS. MIN.
COUPLING NUT RETENTION	100 LBS. MIN.
FORCE TO ENGAGE	6 IN-LBS. MAX.
FORCE TO DISENGAGE	6 IN-LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MIN.
CABLE RETENTION	20 LBS. MIN.
MASS	32.11 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 18 GHz	1.16:1MAX.
INSERTION LOSS	0.045 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1200 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	310 Vrms MIN. @70,000 FEET
RF HIGH POTENTIAL	800 Vrms MIN.
CONTACT RESISTANCE (INNER)	1.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	0.2 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-55 °C TO 150 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION B
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
CONTACT, FLEA	BERYLLIUM COPPER PER ASTM-B-196, GOLD PLATE PER MIL-DTL- 45204, OVER NICKEL PLATE PER QQ-N-290.
FORWARD BEAD	POLYPHENYLENE SULFIDE (PPS), PER ASTM-D-6358
BODY, SLEEVE, CLAMP NUT, & COUPLING NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
DIELECTRIC STOP	POLYETHERMIDE THERMOPLASTIC UNREINFORCED, ASTM-D-5205
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
GASKET	SILICONE RUBBER PER ZZ-R-765
CONTACT RING	BRASS, PER ASTM-B-16, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER QQ-N-290
APPLICATION	
CABLE(S)	UFA210B, UFA210C, 197 SERIES
INSTALLATION	PER CONFIGURATOR

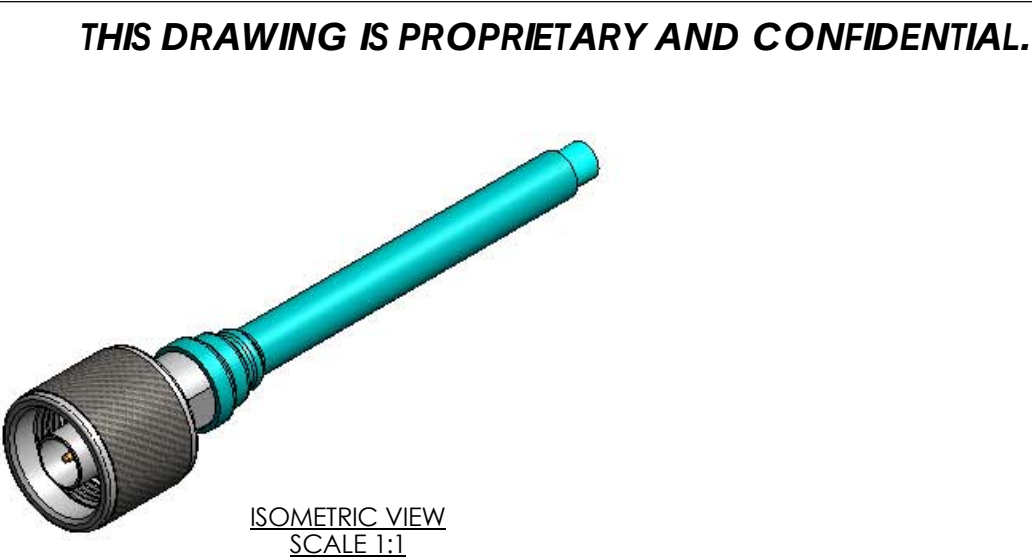

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

REV	DESCRIPTION	DATE	BY	APPVD	CHKD
A	ECO 85490	9/2/2008	MJM	RS	NDS
B	ECO 95659	11/10/2009	MJM	MJR	MJR

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		MICRO-COAX[®] Leading the way in transmission line solutions. Copyright Micro-Coax, Inc.					
		DWN.	MJM	9/2/08							
		CHKD.	MJR	11/30/09							
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		PRECISION N PLUG, KNURLED NUT, 210B, 210C, 197 SERIES CABLE									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.				FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV
.XXX	± .005					64639	B	2:1	1 OF 1	SD904909	B
.XXXX	± .0010										
ANGLES	± 2°										