

ISSUE 5; October 2015

Description

- A 3V standard 2.5 x 2 crystal oscillator in a ceramic package with a hermetically seam sealed metal lid
- For a low phase noise version of this package please see our CFPS-114 series

Frequency Parameters

- Frequency: 750.0kHz to 50.0MHz
- Frequency Stability: $\pm 30.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing: $\pm 3\text{ppm}$ max per year

Electrical Parameters

- Supply Voltage: 3.0V $\pm 5\%$

Operating Temperature Ranges

- 20 to 70°C
- 40 to 85°C

Output Details

- Output Compatibility: CMOS
- Drive Capability: 15pF max
- Tri-State Operation:
Logic '1' ($>80\%V_S$) to pad 1 enables oscillator output
Logic '0' ($<20\% V_S$) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output

Environmental Parameters


- Storage Temperature Range: -55 to 100°C
- Drop: 100cm drop (3 times) onto hard wooden board
- Vibration: 10Hz-36Hz, 1.5mm amplitude, 36Hz-55Hz, 4G sweep time 1min/oct, 2hrs in 3 mutually perpendicular planes

Ordering Information


- Frequency*
- Model*
- Output
- Frequency Stability*
- Operating Temperature Range*
- Supply Voltage (*minimum required)
- Example
10.0MHz CFPS-55
CMOS $\pm 50\text{ppm}$ -20 to 70C 3.0V

Compliance


- RoHS Status (2011/65/EU): Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

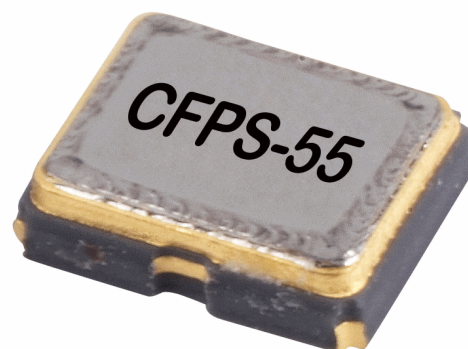

Outline (mm)

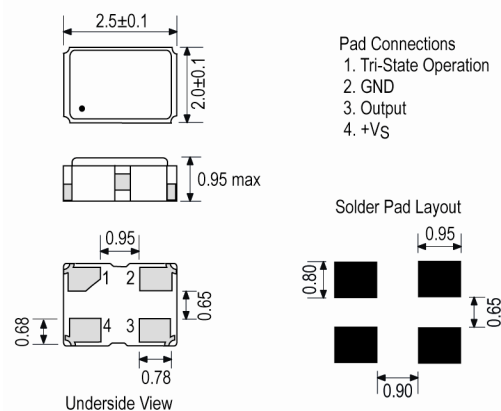

Test Circuit

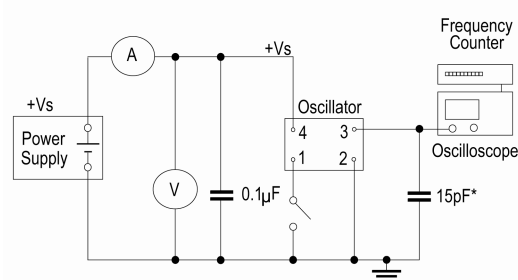

*Inclusive of jigging and equipment capacitance

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443


France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000
- Pack Style: Cutt In tape, cut from a reel
Pack Size: 1
- Pack Style: Bulk Loose in bulk pack
Pack Size: 100

Wave Form

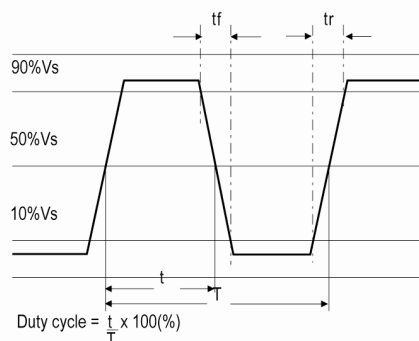

Electrical Specification - maximum limiting values 3.0V $\pm$ 5%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
750.00kHz	19.999999MHz	-20 to 70	± 30.0	5.5	10	45/55
		-40 to 85	± 30.0	5.5	10	45/55
20.0MHz	39.999999MHz	-20 to 70	± 30.0	6.5	10	45/55
		-40 to 85	± 30.0	6.5	10	45/55
40.0MHz	50.0MHz	-20 to 70	± 30.0	7.5	10	45/55
		-40 to 85	± 30.0	7.5	10	45/55

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com