

All components used in this connector conform to RoHS standards.



Tolerances




- 1-20=+/-0.2
- 20-30=+/-0.3
- 30-40=+/-0.4
- 40-50=+/-0.5
- 50-100=+/-0.75
- 100-300=+/-1.5
- Angles=+/-1

Dimensions are in Millimeters

Revisions Description/Approved/Date	Approved M.H.	Date 9/07/04
	Checked M.H.	Date 9/07/04
	Drawn K.R.E.	Date 9/07/04
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

Approved by:
Date:

RECOMMENDED
CABLE STRIPPING DIM'S

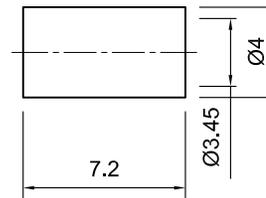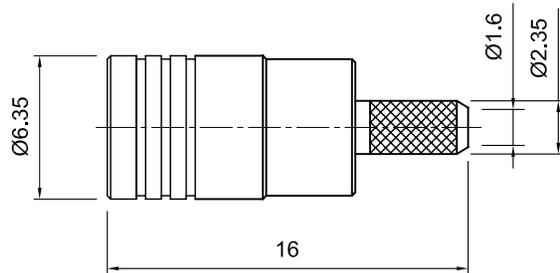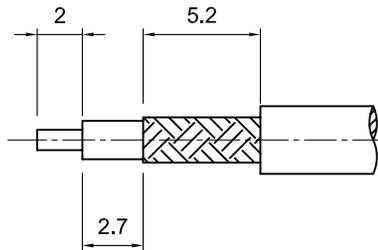

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: M	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket		None
Hex Nut		Same as body
Lock Washer		Same as body



Lighthouse Technologies, Inc.
 5640 Kearny Mesa Rd. Suite N
 San Diego, California 92111
 Part Number:
LTI-SBSM11GT-316

Description
 SMB crimp plug receptacle for RG 316 cable group.
 Gold plated brass body, teflon dielectric.

Scale 1:1	Drawing No. SBSM11-316	File Name SBSM11-316
--------------	---------------------------	-------------------------