

SMP-M EDGE LAUNCH LIMITED DETENTE

SC5371

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-40 GHZ
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACTS: BeCu
PLATING: Au PER MIL-G-45204
INSULATOR: PTFE
INTERFACE: SMP DESC 94007
OP. TEMP RANGE: -65° to +165°C
ROHS COMPLIANT

FORCE TO ENGAGE: 10.0 LBS MAX
FORCE TO DISENGAGE: 2.0 LBS MIN

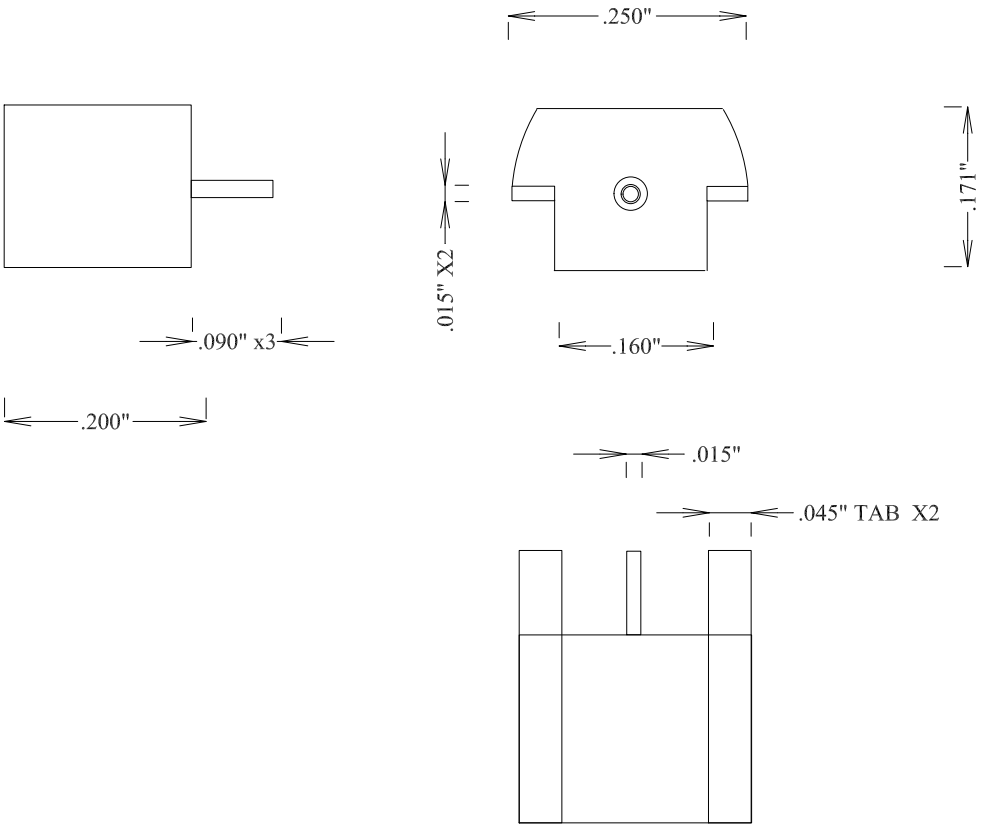

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMP-M EDGE LAUNCH LIMITED DETENTE

SIZE

A

CAGE CODE

3FKR5

DWG NO

SC5371

REV

A

SCALE

SHEET