

10-32-M RA CONNECTOR RG174 RG316 CRIMP

SC5561

SPECIFICATIONS

ELECTRICAL:




FREQUENCY: 0-2 GHZ
VSWR 1.3:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55°C- +120°C

MECHANICAL:

MATERIAL BODY: Ni PLATED BRASS
CENTER CONTACT: BRASS
CONTACT PLATING: Au MIL-G-45204
INSULATOR: TEFLON
INTERFACE: MIL-STD-348A
ROHS COMPLIANT

ASSEMBLY PROCEDURE
STRIP CABLE AS SHOWN,
SLIDE ON CRIMP TUBE,
INSTALL CABLE INTO CRIMP NUT ASSEMBLY,
PUSH CABLE FORWARD UNTIL BOTTOMS OUT,
SOFT SOLDER CENTER CONDUCTOR THRU SIDE HOLE,
SLIDE CRIMP TUBE UP, CRIMP,
THREAD COMPLETED ASSEMBLY INTO BODY,
TIGHTEN

#10-32 UNEF-2B

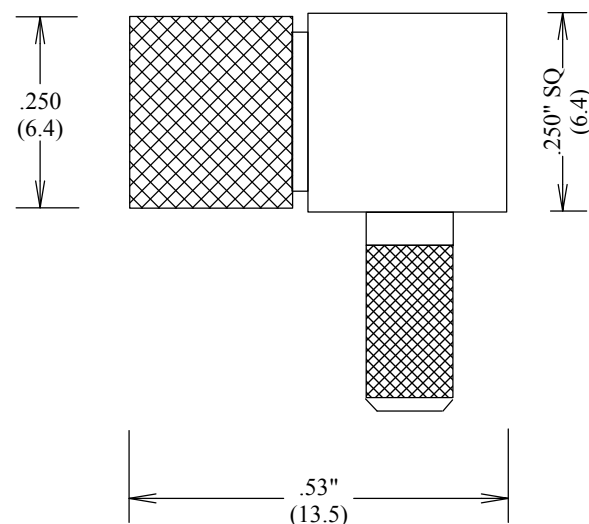

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

10-32-M RA CONNECTOR RG174
RG316 CRIMP

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5561	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical