



ISSUE 1; December 2012 - RoHS 2011/65/EU



Description

- Please note: This document is intended to illustrate the general capability and versatility of IQD's design. For specific enquiries please contact one of IQD's Sales Offices where we can tailor a unique specification to meet your needs.
- Low phase noise optimised design.
- High stability.
- Low ageing.
- Tuning range also available.

Frequency Range

- Frequency 2.0 to 150.0MHz
- Frequency Stability $\pm 1.00\text{ppm}$

Operating Temperature Ranges

- -20 to 70°C
- -40 to 85°C

Frequency Parameters

- Developed Frequencies:
6.40MHz 8.1920MHz 10.0MHz 12.80MHz 16.3840MHz 19.440MHz
24.0MHz 26.0MHz 27.0MHz 28.0MHz 32.7680MHz 56.0MHz 80.0MHz
100.0MHz 143.0MHz
- For other frequency/specification combinations, please contact an IQD Sales Office
- Frequency Stability vs Temperature Range:
Tightest Stability: $\pm 1\text{ppm}$ -20 to 70°C
Widest Temperature Range: $\pm 2\text{ppm}$ -40 to 85°C
- Typical Ageing @ 143MHz: $\pm 1\text{ppm}$ in the 1st year, $\pm 5\text{ppm}$ after 15 years

Frequency Adjustment

- Frequency Adjustment Range: $\pm 5\text{ppm}$ to $\pm 15\text{ppm}$ (optional)

Output Details

- Available with either HCMOS output up to 120MHz or Sinewave output up to 150MHz

Noise Parameter

- Typical Phase Noise Figures @ 10MHz (dBc/Hz):


100Hz	1kHz	10kHz	100kHz
-115	-135	-140	-145

Environmental Parameters


- Environmental testing taken from IEC 60068
Please contact an IQD Sales Office for full details
- Storage Temperature Range: -55 to 105°C

Ordering Information

- Minimum Enquiry Information:
Frequency
Model
Supply Voltage
Output
Frequency Stability (over operating temperature range)
Operating Temperature Range
Frequency Adjustment

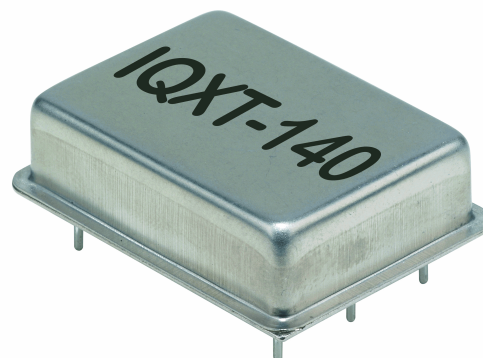

Outline (mm)

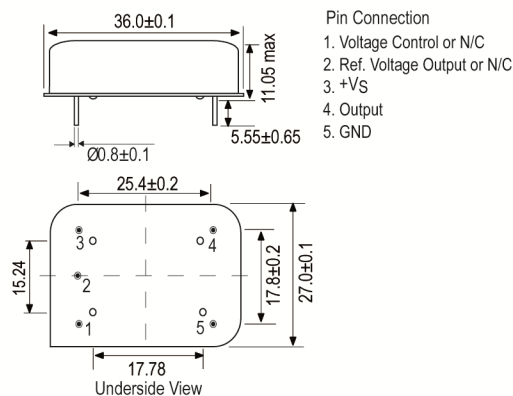

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com



Packing Details

- Pack Style: **Bulk** Supplied tube or box packaging
- Pack Size 40
- Alternative packing options available

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com