


Features

- GPS, GLONASS, Galileo and Compass LNA
- 20.5 dB Gain at 1575 MHz
- 0.65 dB NF at 1575 MHz
- Power ON/OFF Function.
- Supply Voltage = +1.8 ~ +5.0 V

Description

ASL21X is an LNA for GPS, GLONASS, Galileo, Compass and XM in mobile equipment which requires lower current and lower noise. Power saving function is built in. Low noise performance is kept over the wide range of power enable voltage



Package Style: SOT363

Typical Performance

(Supply Voltage = +1.8 ~ +5.0 V, T_A = +25 °C, Z_0 = 50 Ω)

Parameters	Units	Typical							
Testing Frequency	MHz	1575	1575	1575	2450	2450	2450	2440	2338
Gain	dB	16.5	20.5	21.5	20.5	20.0	13.5	19.5	21.0
S11	dB	-6	-12	-15	-15	-15	-15	-18	-11
S22	dB	-12	-12	-12	-10	-10	-15	-10	-14
Input IP3	dBm	-20 ¹⁾	-20 ¹⁾	-12 ¹⁾	-8 ¹⁾	-13 ¹⁾	5.5 ²⁾	-9 ¹⁾	-3 ¹⁾
Noise Figure	dB	1.10	0.65	0.60	0.80	0.80	0.90	0.80	0.60
Output P1dB	dBm	-10	-6	-2	0	-1	6	-2	3
Supply Current	mA	2.0	6.0	13.0	13.0	13.0	12.0	10.0	23.0
Supply Voltage	V	+1.8	+1.8	+3.0	+3.0	+3.0	+3.0	+3.3	+5.0
Control Current	μ A	300	300	300	300	-	300	300	-
Control Voltage V_{CTL}	V	+1.8	+1.8	+3.0	+3.0	-	+3.0	+3.3	-

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1 MHz

2) IIP3 is measured with two tones at an input power of -20 dBm/tone separated by 1 MHz

Product Specifications

Parameters	Units	Min	Typ	Max
Frequency	MHz		1575	
Gain	dB		20.5	
S11	dB		-12	
S22	dB		-12	
Noise Figure	dB		0.7	
Supply Current	mA	4	6	8
Supply Voltage	V		+1.8	
Control Current	μ A		300	
Control Voltage V_{CTL} ¹⁾	V		+1.8	

1) Power On V_{CTL} Voltage = 0.5 V < V_{CTL} < 5

Absolute Maximum Ratings

Parameters	Rating
Operating Case Temperature	-40 to +105 °C
Storage Temperature	-40 to +150 °C
Device Voltage	+6 V
Operating Junction Temperature	+150 °C
Input RF Power (CW, 50ohm matched)*	+22 dBm

Application Circuit


GPS/GLONASS/Galileo/Compass

- 1559 ~ 1610MHz (1.8V, 2mA)
- 1559 ~ 1610MHz (1.8V, 6mA)
- 1559 ~ 1610MHz (Robust ESD, ± 3 kV)
- 1559 ~ 1610MHz (3V, 5mA, without Power ON/OFF Function)
- 1559 ~ 1610MHz (3V, 13mA)
- 1164 ~ 1300 MHz (3V, 13mA)
- 1550 ~ 1620 MHz (3V, 13mA)
- 2400 ~ 2500 MHz (3V, 13mA)
- 2400 ~ 2500 MHz (3V, 13mA, without Power ON/OFF Function)
- 2400 ~ 2500 MHz (3V, 12mA, Gain 13.5dB)
- 2400 ~ 2480 MHz (3.3V, 10mA)
- XM (5V, 23mA, without Power ON/OFF Function)
- XM (5V, 23mA, Low Gain, without Power ON/OFF Function)

Pin Configuration

Pin No.	Function
1	RFIN
2,5	GND
3	Enable
4	RFOUT & Bias
6	NC (Not connected)

Outline Drawing

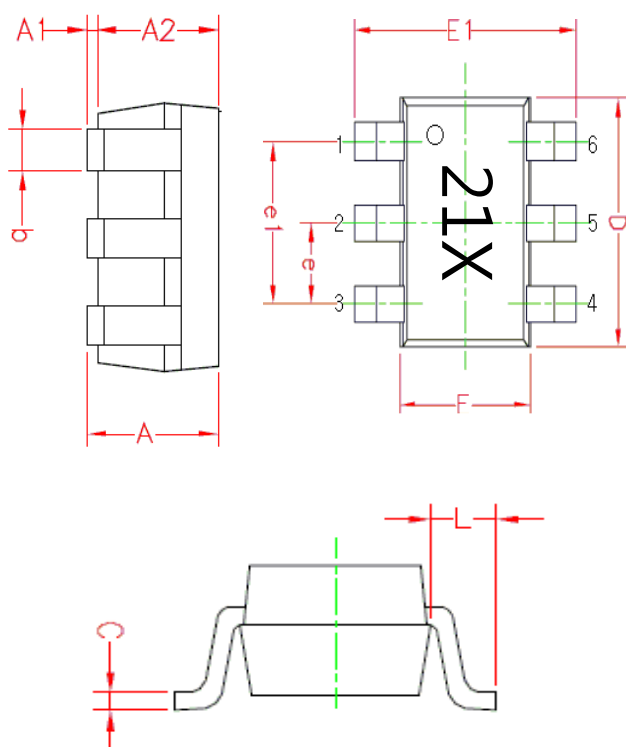

Symbols	Dimensions (In mm)		
	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.025	0.062	0.10
A2	0.875	0.937	1.00
b	0.20	0.30	0.40
C	0.10	0.125	0.15
D	1.90	2.00	2.10
F	1.15	1.25	1.35
E1	2.00	2.10	2.20
e	--	0.65BSC	--
e1	--	1.30BSC	--
L	--	0.425REF	--

Pin NO.	Function	Pin NO.	Function.
1	RFIN	4	RFOUT & Bias
2	GND	5	GND
3	Enable	6	NC (not connected)

ESD Classification & Moisture Sensitivity Level

ESD Classification

HBM	Class 0
	Voltage Level: 200 V
MM	Class A
	Voltage Level: 50 V

CAUTION: ESD-sensitive device!

Moisture Sensitivity Level (MSL)

Level 3 at 260 °C reflow

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

GPS, GLONASS, Galileo, Compass


1559 ~ 1610 MHz

+1.8 V, 2mA


Frequency (MHz)	1559 ~ 1610
Magnitude S21 (dB)	16.5
Magnitude S11 (dB)	-6
Magnitude S22 (dB)	-12
Noise Figure (dB)	1.1
Input IP3 (dBm) ¹⁾	-20
Output P1dB (dBm)	-10
Supply Current (mA)	2
Supply Voltage (V)	+1.8
Control Current (μA)	300
Control Voltage V _{CTL} (V)	+1.8

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

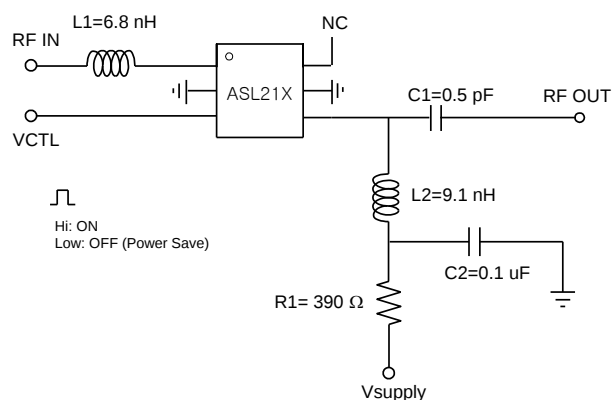

Board Layout (FR4, 20x20 mm², 0.8T)

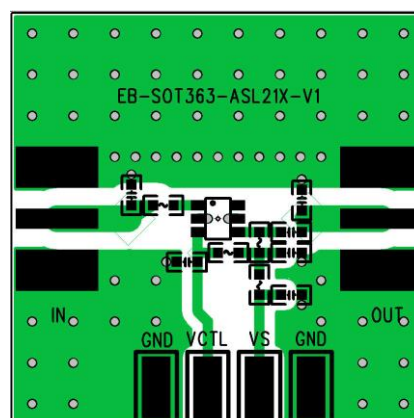

S-parameters & K-factor

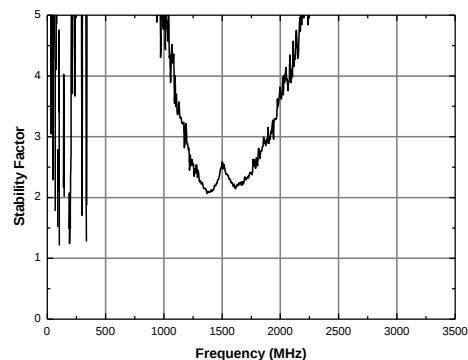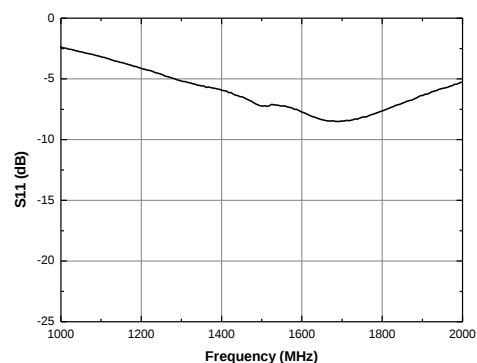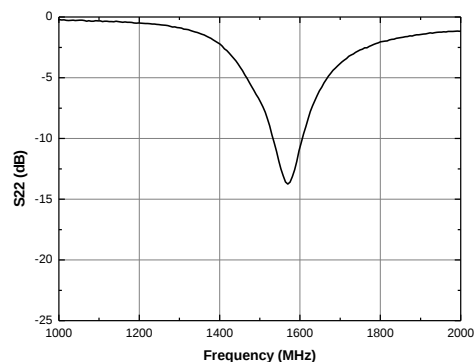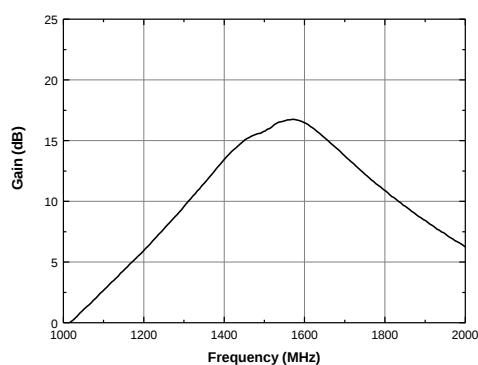

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

GPS, GLONASS, Galileo, Compass


1559 ~ 1610 MHz

+1.8 V, 6mA


Frequency (MHz)	1559 ~ 1610
Magnitude S21 (dB)	20.5
Magnitude S11 (dB)	-12
Magnitude S22 (dB)	-12
Noise Figure (dB)	0.65
Input IP3 (dBm) ¹⁾	-20
Output P1dB (dBm)	-6
Supply Current (mA)	6
Supply Voltage (V)	+1.8
Control Current (μA)	300
Control Voltage V _{CTL} (V)	+1.8

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

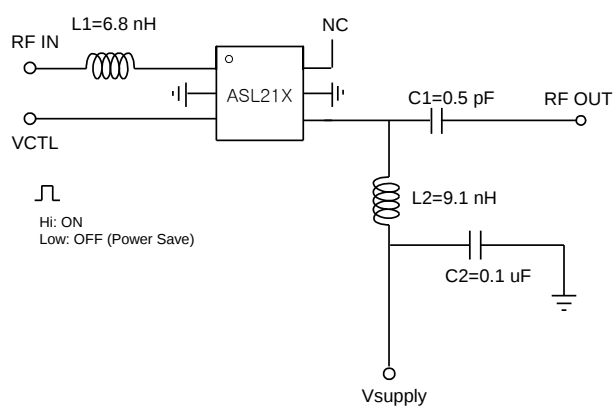


Board Layout (FR4, 20x20 mm², 0.8T)

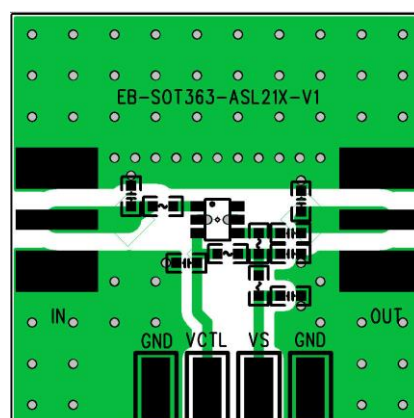


S-parameters & K-factor

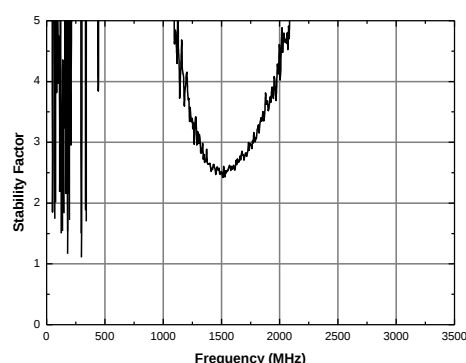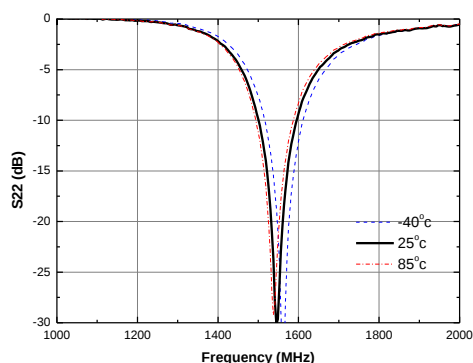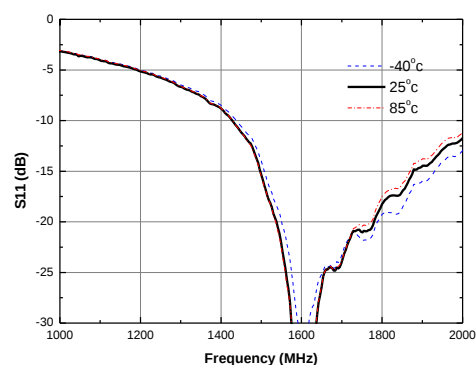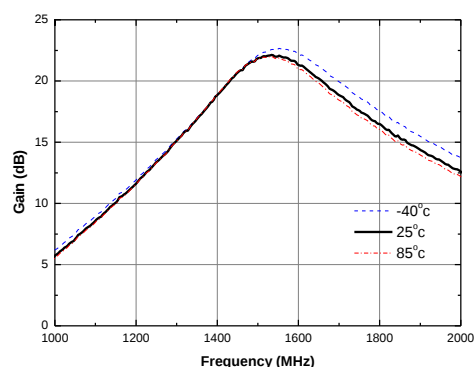


Current vs. Temperature

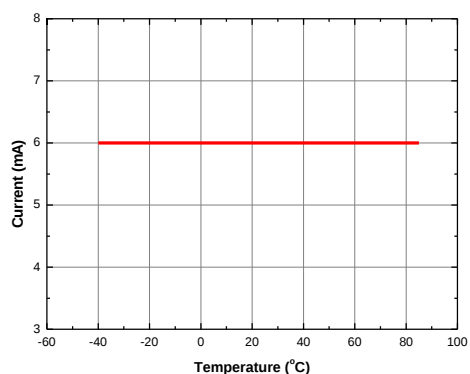


Gain vs. Temperature

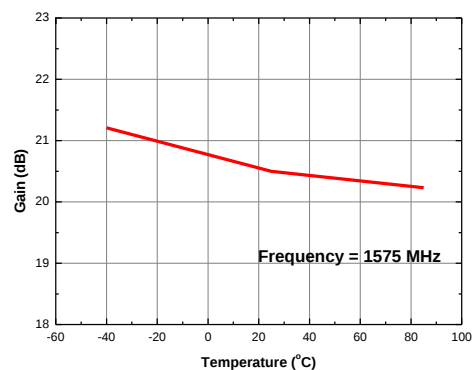


P1dB vs. Temperature

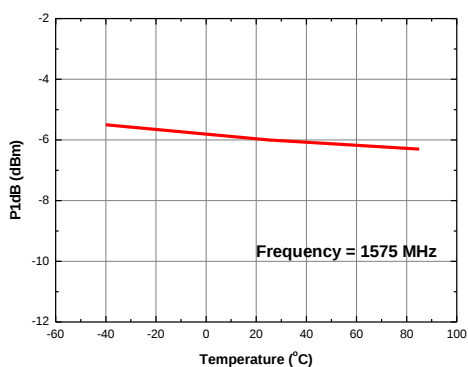


Input IP3 vs. Temperature

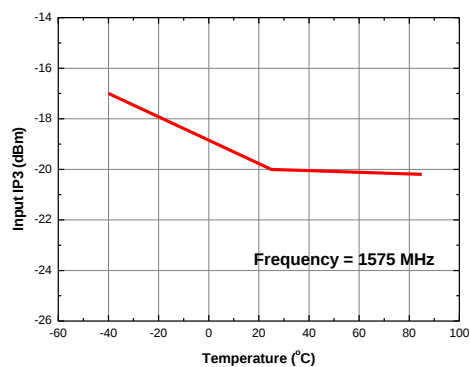

NF vs. Temperature

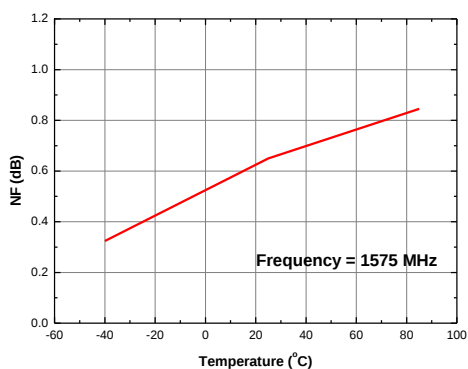

NF vs. Frequency

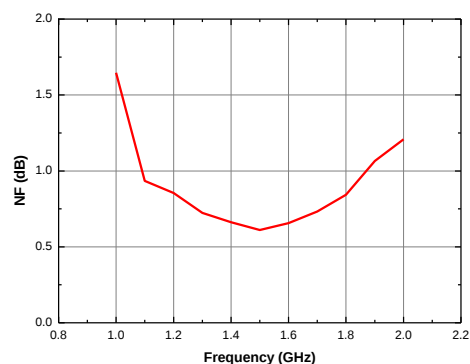

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

Robust ESD (± 3 kV)¹⁾

GPS, GLONASS, Galileo, Compass

1559 ~ 1610 MHz

+3 V / 4mA


Without Power ON/OFF Function

Frequency (MHz)	1559 ~ 1610
Magnitude S21 (dB)	20
Magnitude S11 (dB)	-15
Magnitude S22 (dB)	-15
Noise Figure (dB)	0.95
Input IP3 (dBm) ¹⁾	-17.0
Output P1dB(dBm)	-3.5
Supply Current (mA)	4
Supply Voltage (V)	+3


1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz

1) Test Method: Contact discharge on GPS patch antenna input. Applying 10 times repeated voltage at 1 sec time Interval.





Schematic

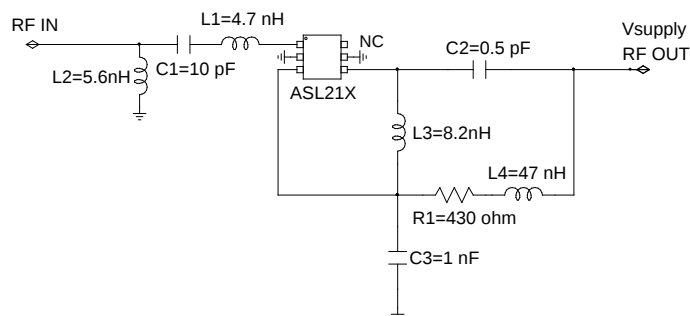

Board Layout (FR4, 20x20 mm², 0.8T)

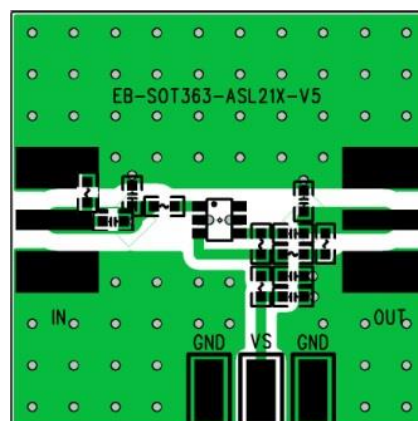

S-parameters & K-factor

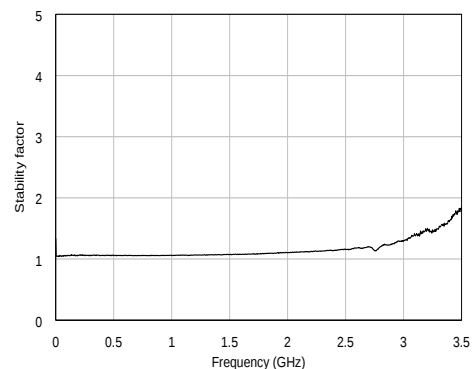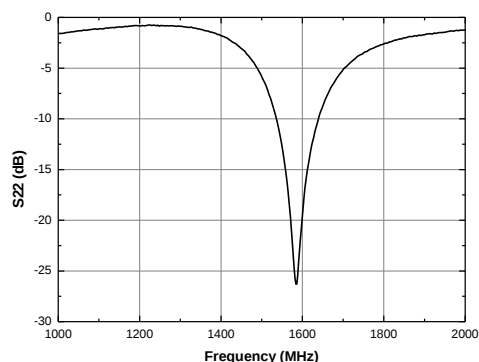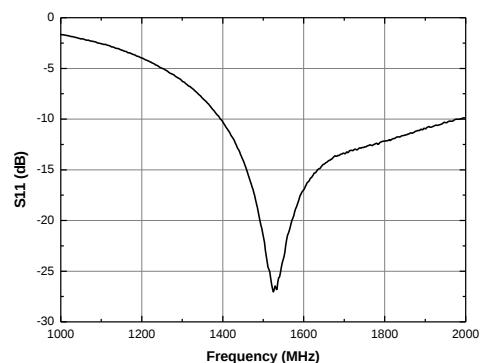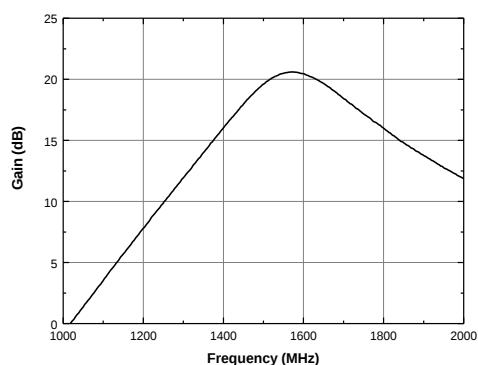

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

Robust ESD (± 3 kV)¹⁾

GPS, GLONASS, Galileo, Compass

1559 ~ 1610 MHz

+3 V / 12mA


Without Power ON/OFF Function

Frequency (MHz)	1559 ~ 1610
Magnitude S21 (dB)	23.5
Magnitude S11 (dB)	-15
Magnitude S22 (dB)	-15
Noise Figure (dB)	0.65
Input IP3 (dBm) ¹⁾	-12
Output P1dB(dBm)	0
Supply Current (mA)	12
Supply Voltage (V)	+3


1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz

1) Test Method: Contact discharge on GPS patch antenna input. Applying 10 times repeated voltage at 1 sec time Interval.





Schematic

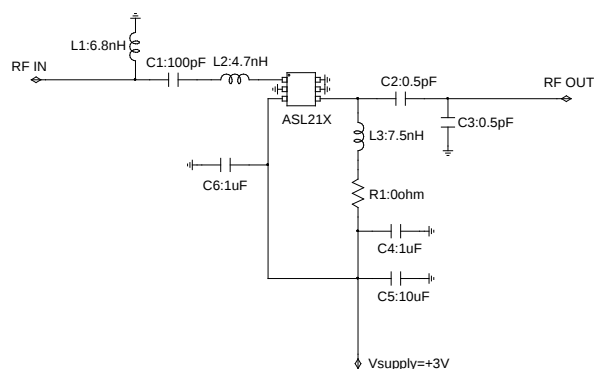

Board Layout (FR4, 20x20 mm², 0.8T)

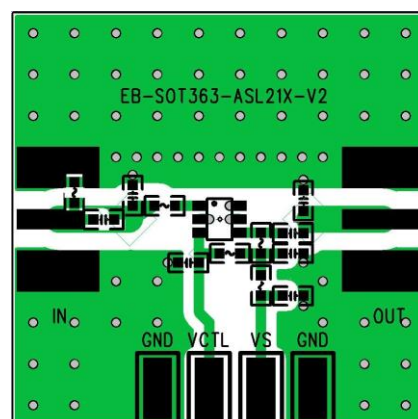

S-parameters & K-factor

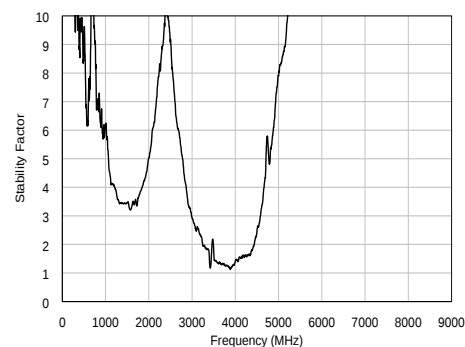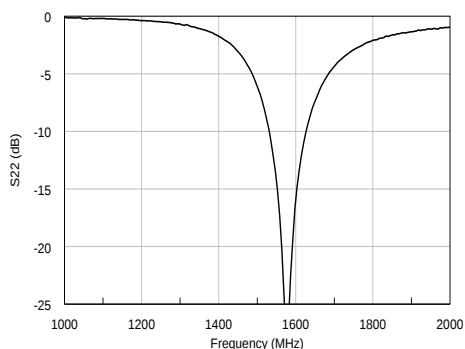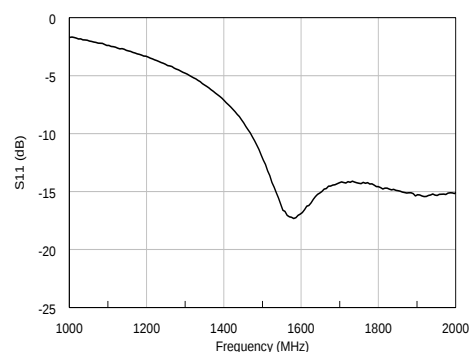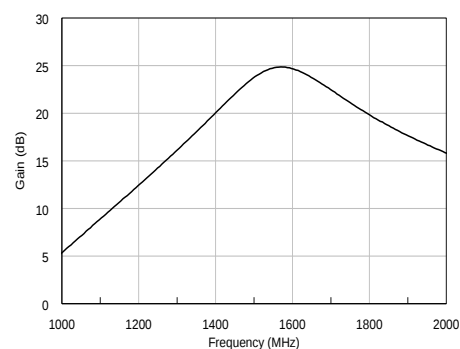

APPLICATION CIRCUIT

GPS, GLONASS, Galileo, Compass

1559 ~ 1610 MHz


+3 V, 5mA

Without Power ON & OFF Function


Frequency (MHz)	1559 ~ 1610
Magnitude S21 (dB)	19.5
Magnitude S11 (dB)	-12
Magnitude S22 (dB)	-12
Noise Figure (dB)	0.7
Input IP3 (dBm) ¹⁾	-20
Output P1dB(dBm)	-6
Supply Current (mA)	5
Supply Voltage (V)	+3

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

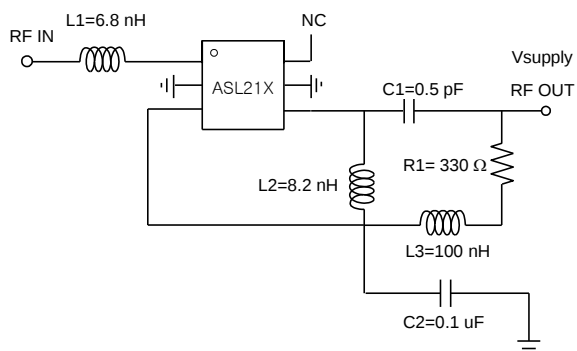

Board Layout (FR4, 20x20 mm², 0.8T)

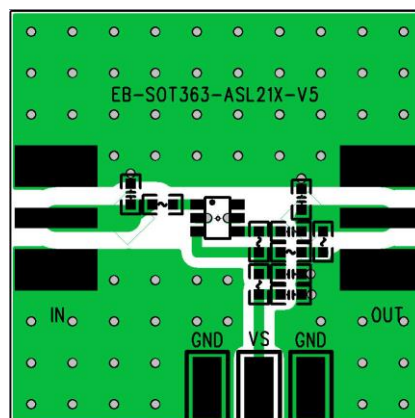

S-parameters & K-factor

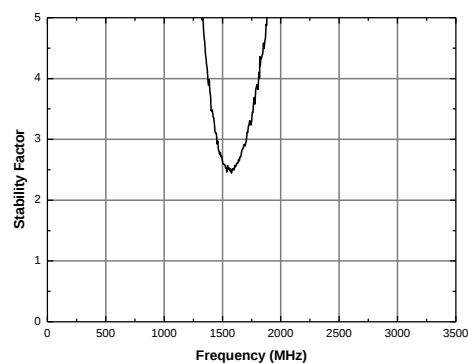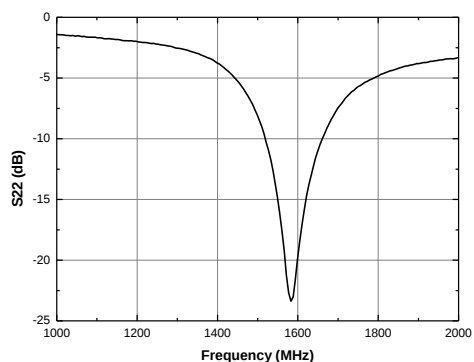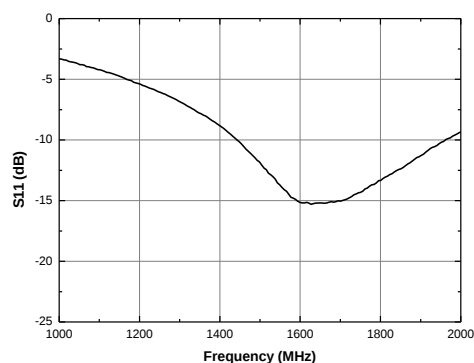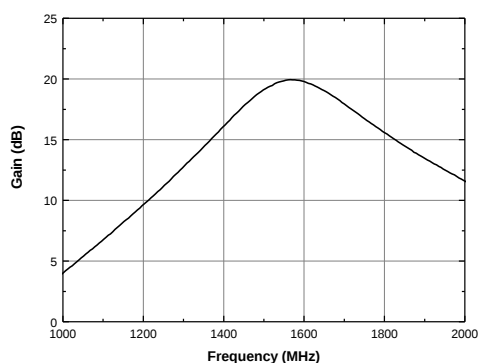

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

GPS, GLONASS, Galileo, Compass


1559 ~ 1610 MHz

+3 V, 13mA


Frequency (MHz)	1559 ~ 1610
Magnitude S21 (dB)	21.5
Magnitude S11 (dB)	-15
Magnitude S22 (dB)	-12
Noise Figure (dB)	0.6
Input IP3 (dBm) ¹⁾	-12
Output P1dB (dBm)	-2
Supply Current (mA)	13
Supply Voltage (V)	+3.0
Control Current (μA)	300
Control Voltage V _{CTL} (V)	+3.0

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

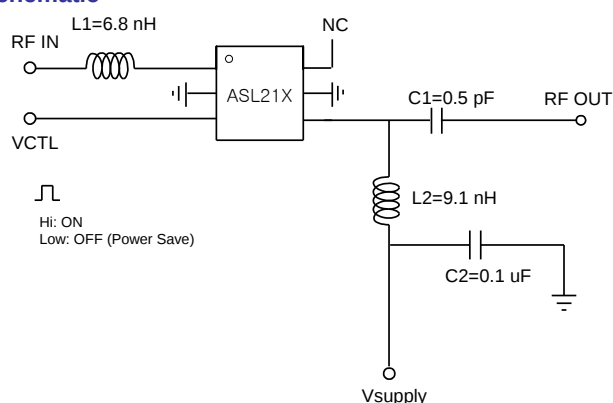

Board Layout (FR4, 20x20 mm², 0.8T)

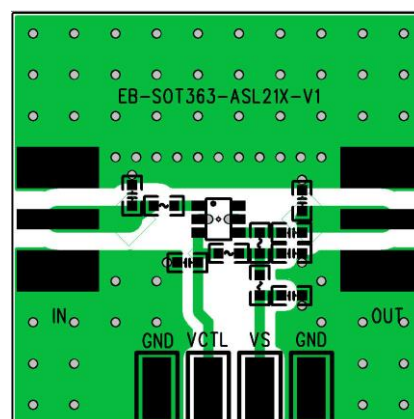

S-parameters & K-factor

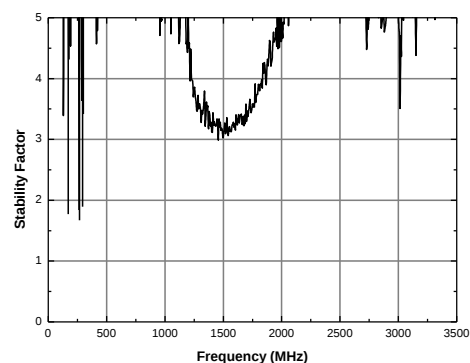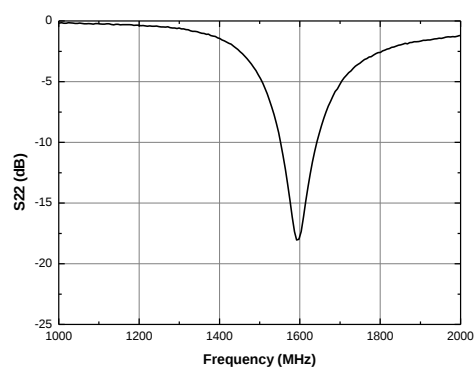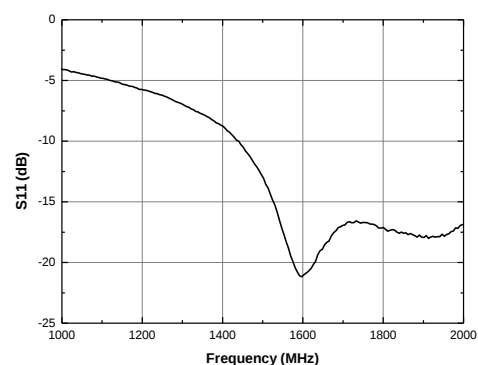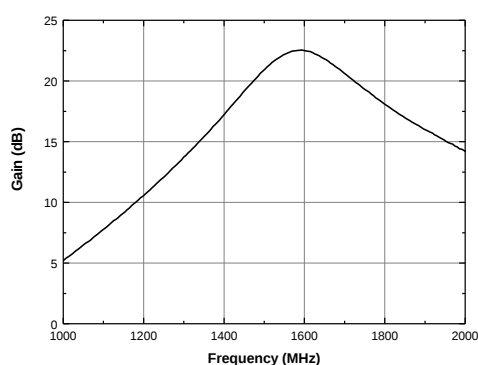

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

GPS, GLONASS, Galileo, Compass


1164 ~ 1300 MHz

+3 V, 13 mA


Frequency (MHz)	1164	1300
Magnitude S21 (dB)	21	21
Magnitude S11 (dB)	-11	-18
Magnitude S22 (dB)	-12	-12
Noise Figure (dB)	0.6	0.6
Input IP3 (dBm) ¹⁾	1	1
Output P1dB (dBm)	6.5	6.0
Supply Current (mA)	13	13
Supply Voltage (V)	+3.0	+3.0
Control Current (μA)	300	300
Control Voltage V _{CTL} (V)	+3.0	+3.0

1) IIP3 is measured with two tones at an input power of -30 dBm/tone separated by 1MHz





Schematic

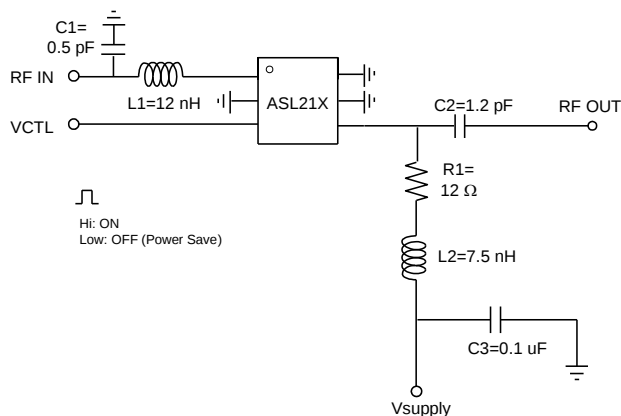

Board Layout (FR4, 20x20 mm², 0.8T)

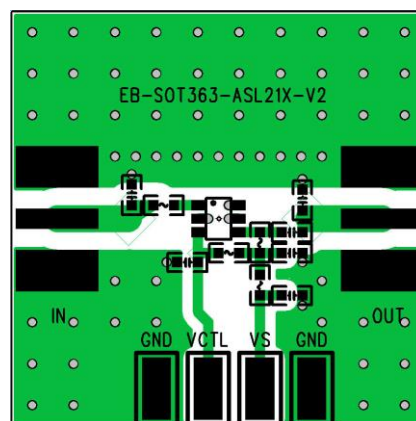

S-parameters & K-factor

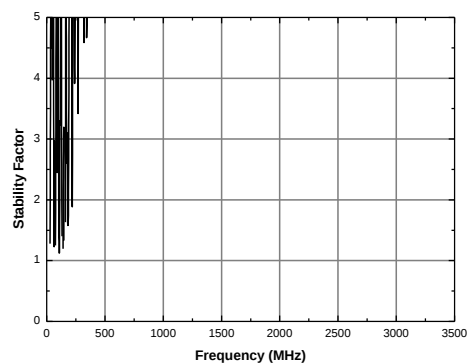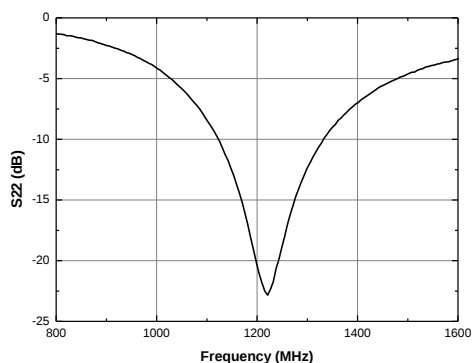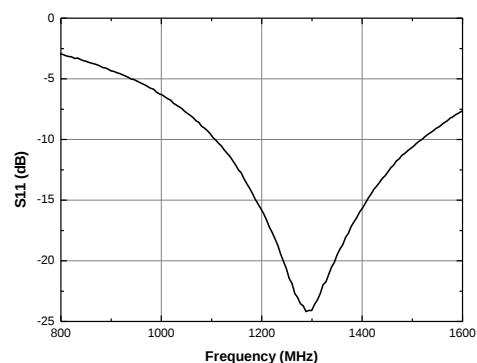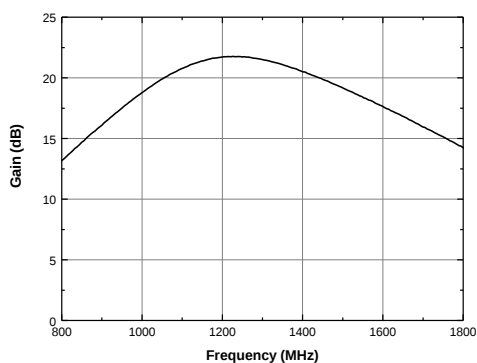

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

GPS, GLONASS, Galileo, Compass


1550 ~ 1620 MHz

+3 V, 13 mA


Frequency (MHz)	1550	1620
Magnitude S21 (dB)	22.0	22.2
Magnitude S11 (dB)	-15	-15
Magnitude S22 (dB)	-9	-12
Noise Figure (dB)	0.6	0.6
Input IP3 (dBm) ¹⁾	-9	-10
Output P1dB (dBm)	-1	-2
Supply Current (mA)	13	13
Supply Voltage (V)	+3.0	+3.0
Control Current (μA)	300	300
Control Voltage V _{CTL} (V)	+3.0	+3.0

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

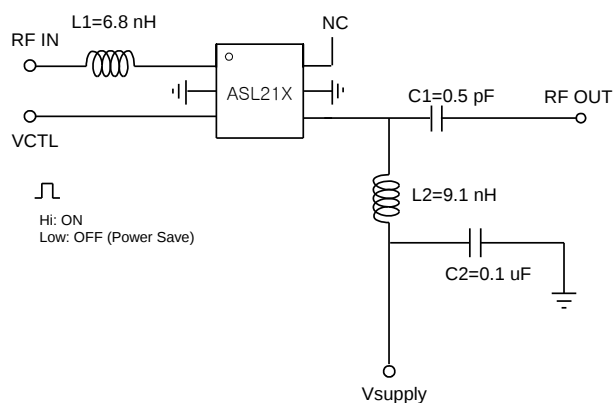

Board Layout (FR4, 20x20 mm², 0.8T)

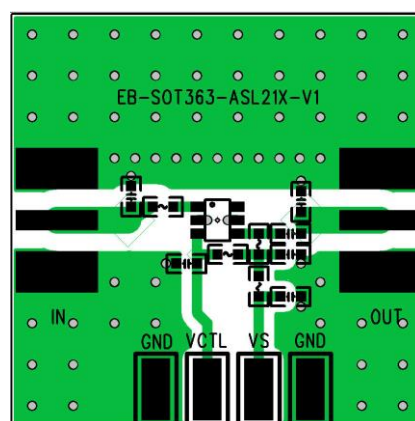

S-parameters & K-factor

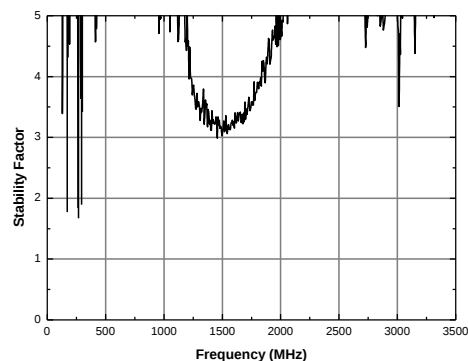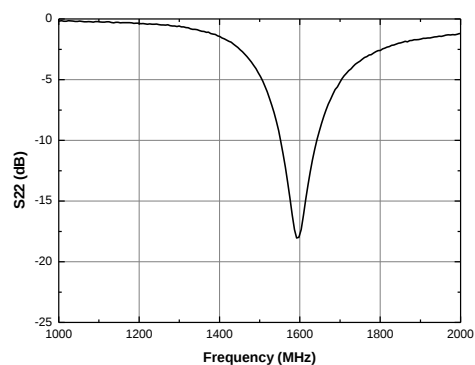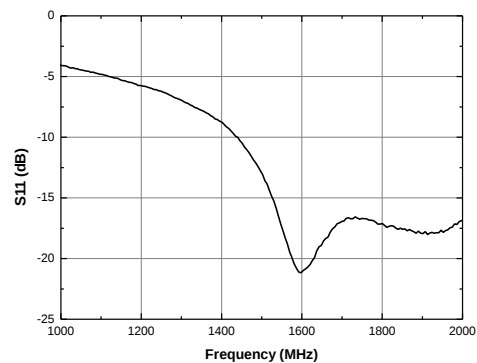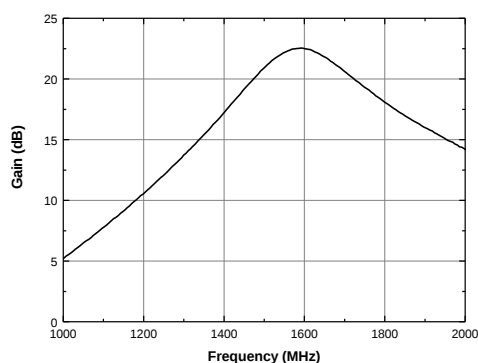

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

WLAN


2400 ~ 2500 MHz

+3V, 13 mA


Frequency (MHz)	2400 ~ 2500
Magnitude S21 (dB)	20.5
Magnitude S11 (dB)	-15
Magnitude S22 (dB)	-10
Noise Figure (dB)	0.8
Input IP3 (dBm) ¹⁾	-8
Output P1dB(dBm)	0
Supply Current (mA)	13
Supply Voltage (V)	+3.0
Control Current (μA)	300
Control Voltage V _{CTL} (V)	+3.0

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

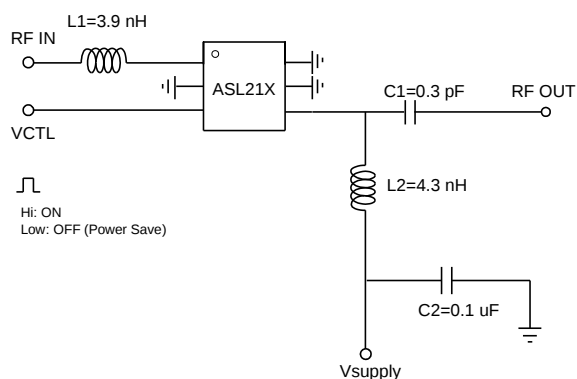

Board Layout (FR4, 20x20 mm², 0.8T)

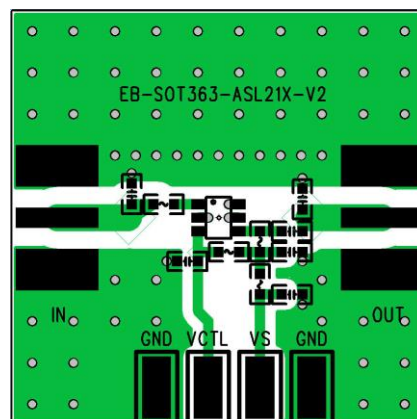

S-parameters & K-factor

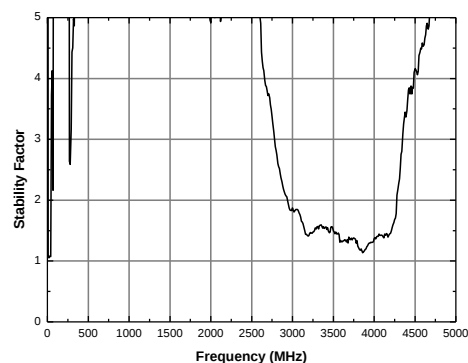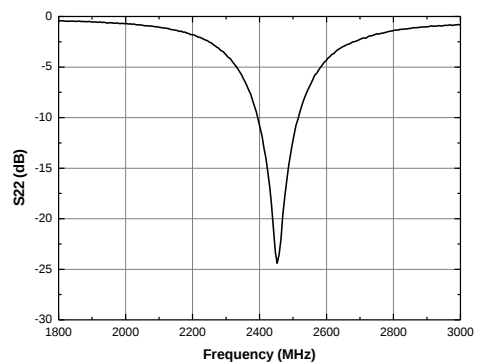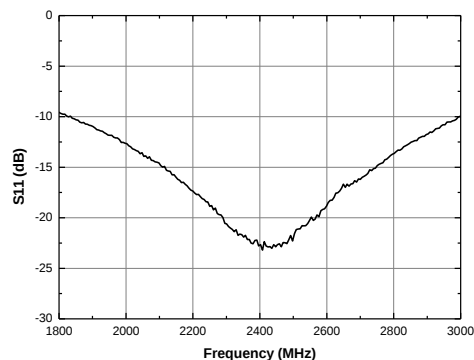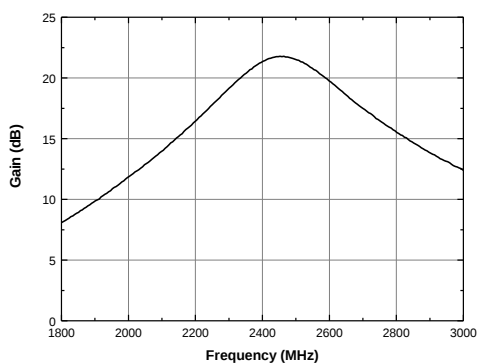

APPLICATION CIRCUIT

WLAN

2400 ~ 2500 MHz


+3V, 13 mA

Without Power ON/OFF
Function


Frequency (MHz)	2400 ~ 2500
Magnitude S21 (dB)	20
Magnitude S11 (dB)	-15
Magnitude S22 (dB)	-10
Noise Figure (dB)	0.8
Input IP3 (dBm) ¹⁾	-13
Output P1dB(dBm)	-1
Supply Current (mA)	13
Supply Voltage (V)	+3.0

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

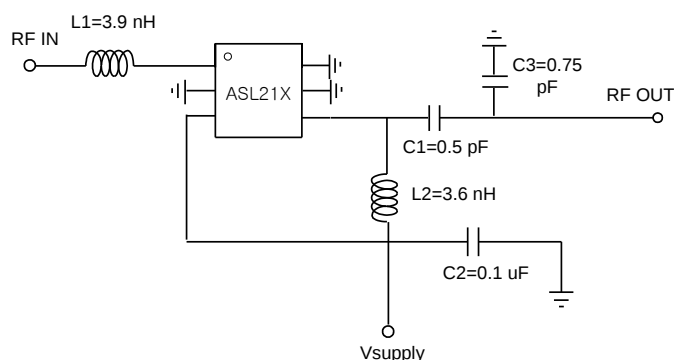

Board Layout (FR4, 20x20 mm², 0.8T)

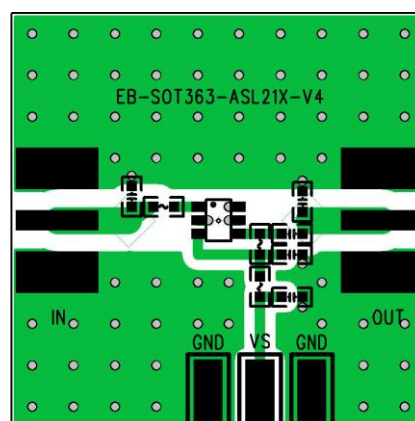

S-parameters & K-factor

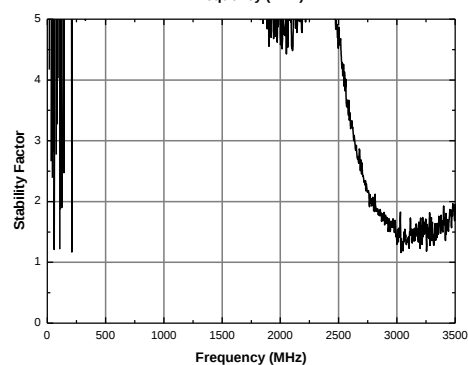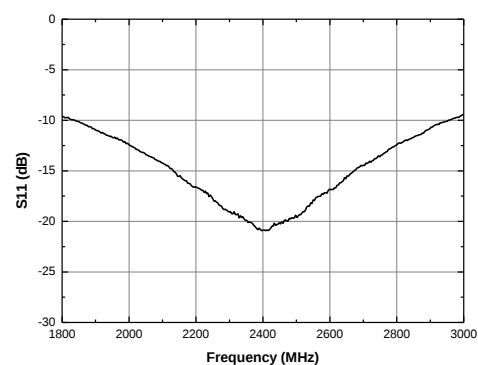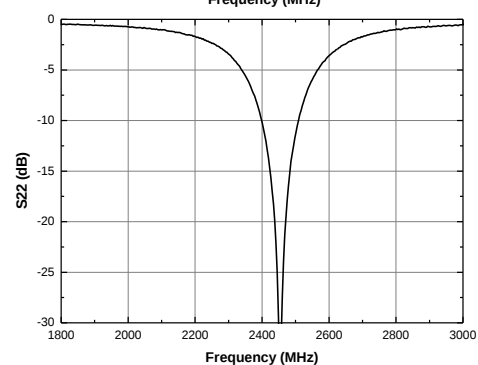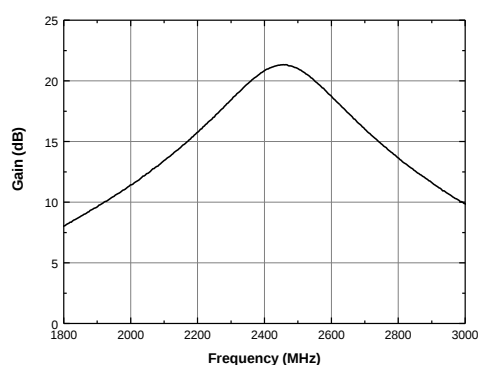

APPLICATION CIRCUIT

WLAN

Gain 13.5 dB


2400 ~ 2500 MHz

+3V, 12 mA


Frequency (MHz)	2400 ~ 2500
Magnitude S21 (dB)	13.5
Magnitude S11 (dB)	-15
Magnitude S22 (dB)	-15
Noise Figure (dB)	0.9
Input IP3 (dBm) ¹⁾	5.5
Output P1dB(dBm)	6
Supply Current (mA)	12
Supply Voltage (V)	+3.0
Control Current (μA)	300
Control Voltage V _{CTL} (V)	+3.0

1) IIP3 is measured with two tones at an input power of -20 dBm/tone separated by 1MHz





Schematic

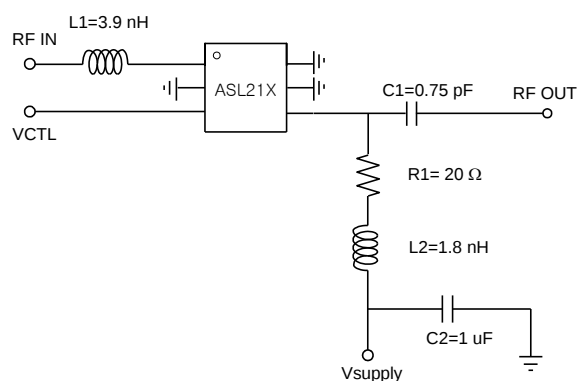

Board Layout (FR4, 20x20 mm², 0.8T)

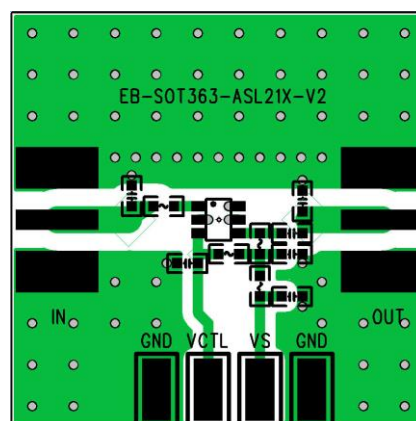

S-parameters & K-factor

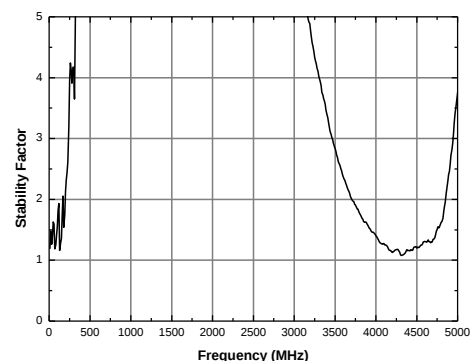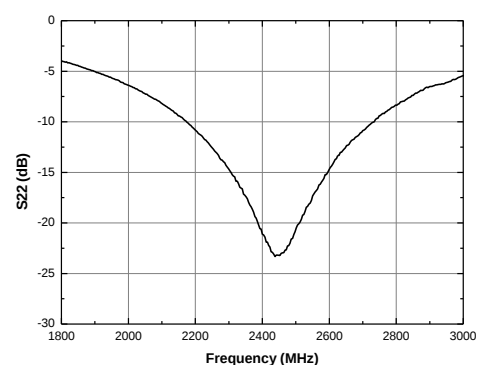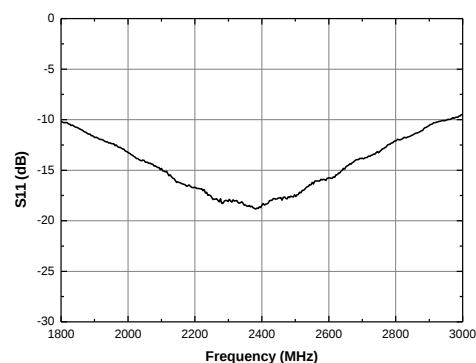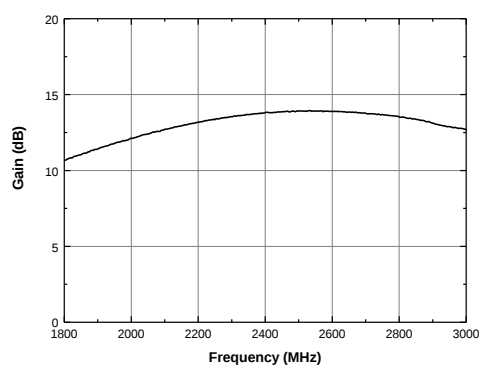

Low Noise GPS, GLONASS, Galileo and Compass Amplifier

APPLICATION CIRCUIT

WLAN


2400 ~ 2480 MHz

+3.3V, 10 mA


Frequency (MHz)	2400 ~ 2500
Magnitude S21 (dB)	19.5
Magnitude S11 (dB)	-18
Magnitude S22 (dB)	-10
Noise Figure (dB)	0.8
Input IP3 (dBm) ¹⁾	-9
Output P1dB(dBm)	-2
Supply Current (mA)	10
Supply Voltage (V)	+3.3
Control Current (μA)	300
Control Voltage V _{CTL} (V)	+3.3

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

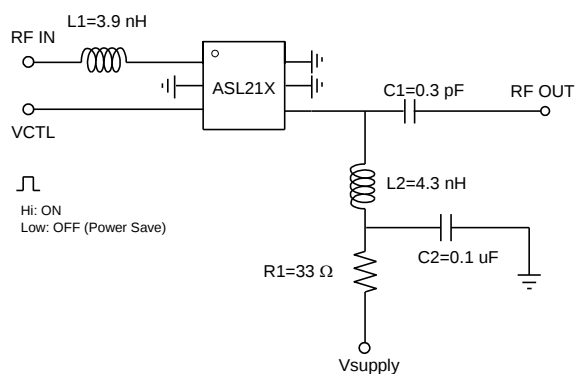


Board Layout (FR4, 20x20 mm², 0.8T)

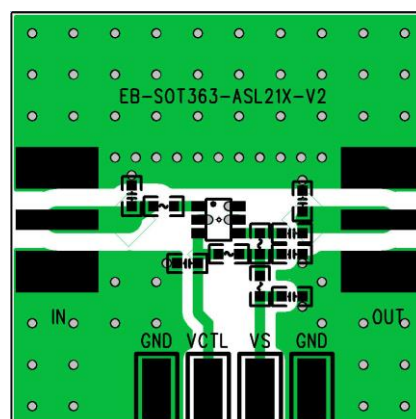


S-parameters & K-factor

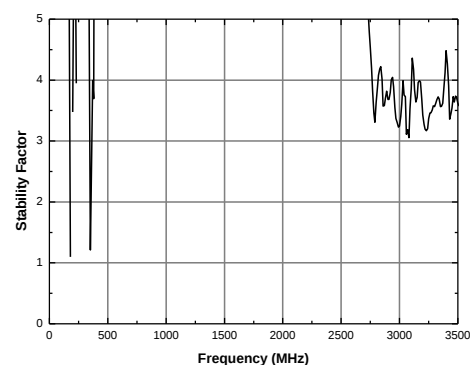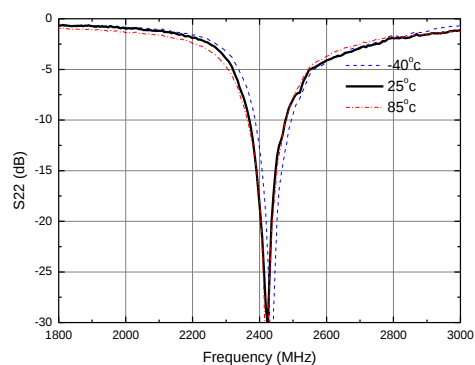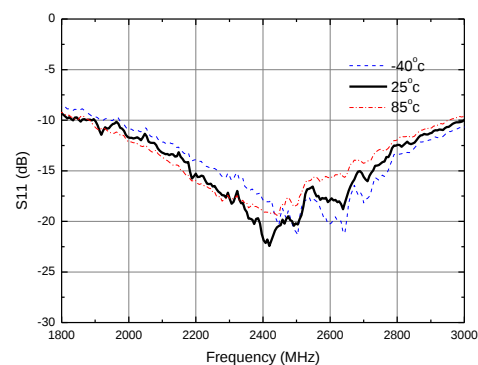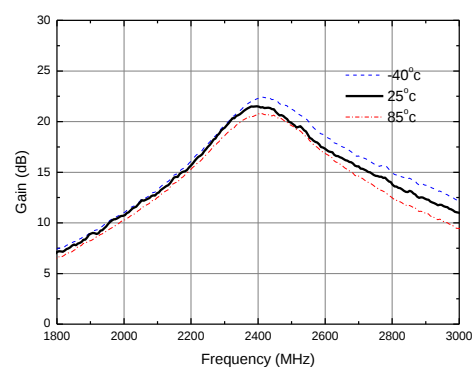


Current vs. Temperature

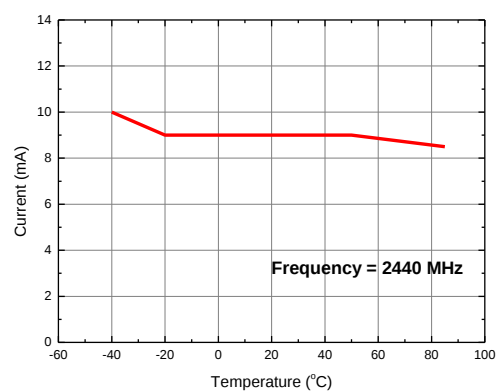

Gain vs. Temperature

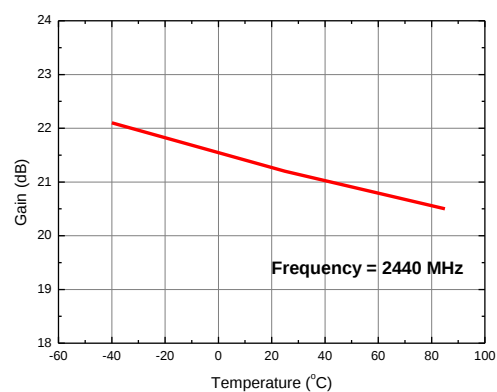

NF vs. Temperature

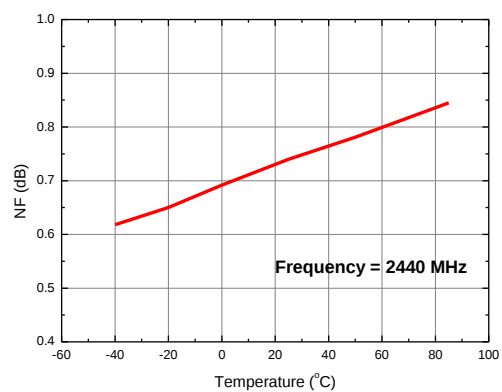

APPLICATION CIRCUIT

XM

2338


+5V, 23 mA

**Without Power ON & OFF
Function**


Frequency (MHz)	2338
Magnitude S21 (dB)	21
Magnitude S11 (dB)	-11
Magnitude S22 (dB)	-14
Noise Figure (dB)	0.6
Input IP3 (dBm) ¹⁾	-3
Output P1dB(dBm)	3
Supply Current (mA)	23
Supply Voltage (V)	+5.0

1) IIP3 is measured with two tones at an input power of -40 dBm/tone separated by 1MHz





Schematic

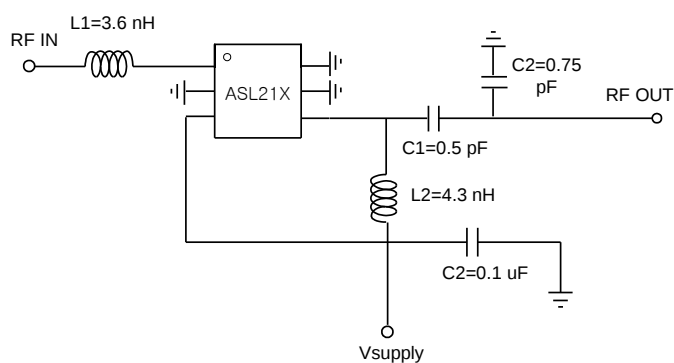


Board Layout (FR4, 20x20 mm², 0.8T)

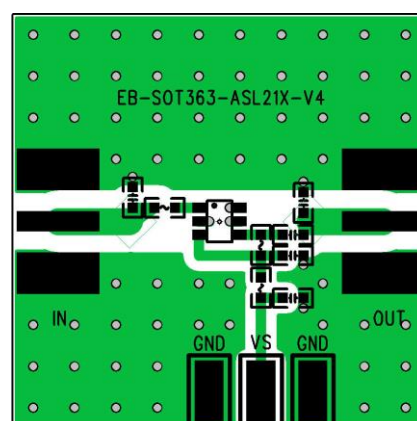


S-parameters & K-factor

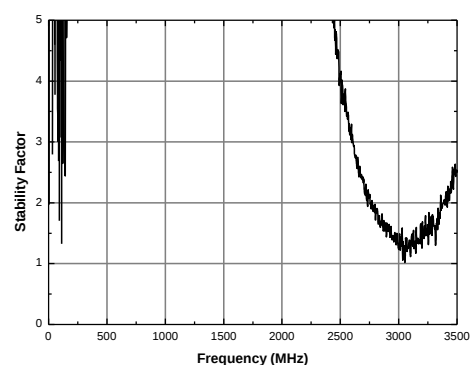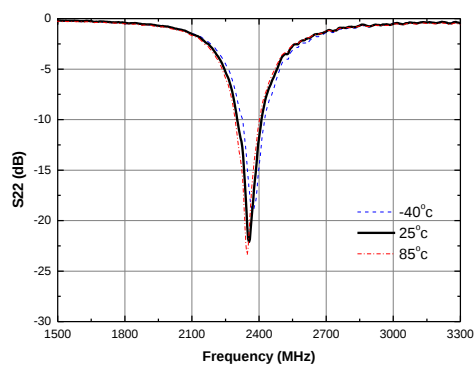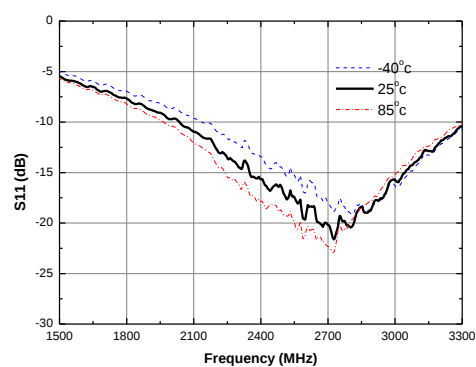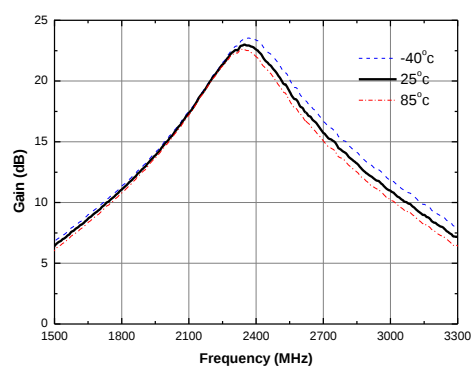


Current vs. Temperature

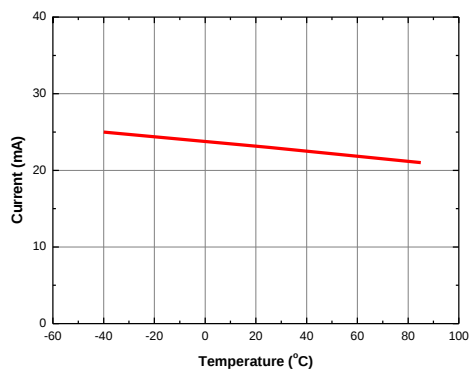


Gain vs. Temperature

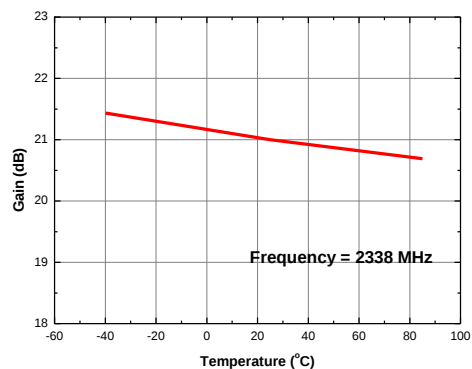


P1dB vs. Temperature

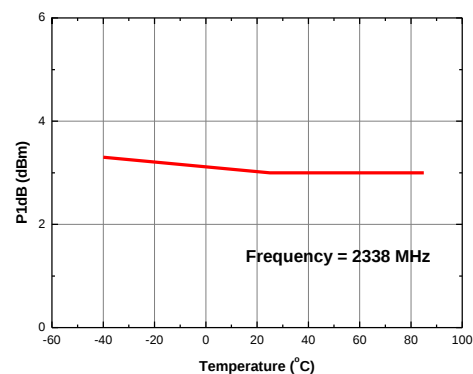


Input IP3 vs. Temperature

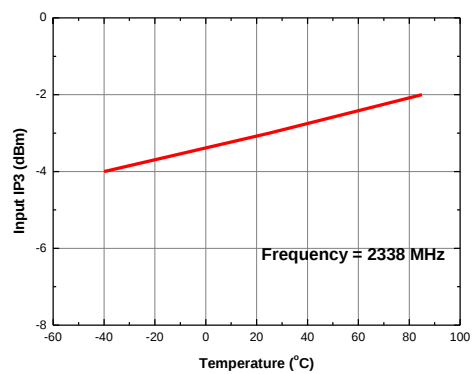

NF vs. Temperature

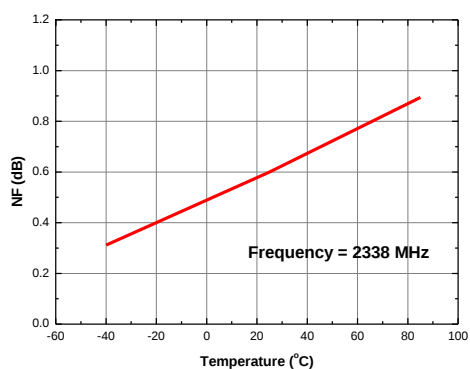

NF vs. Frequency

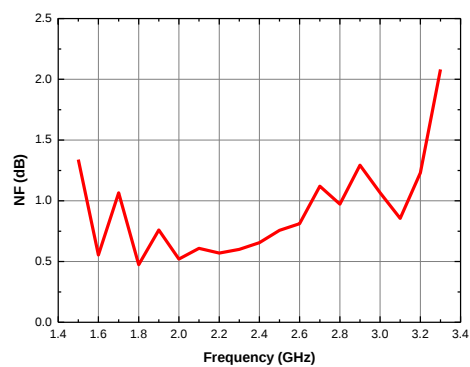

APPLICATION CIRCUIT

XM (Low Gain)

2338


+5V, 23 mA

**Without Power ON & OFF
Function**


Frequency (MHz)	2338
Magnitude S21 (dB)	19.5
Magnitude S11 (dB)	-11
Magnitude S22 (dB)	-16
Noise Figure (dB)	0.65
Input IP3 (dBm) ¹⁾	3
Output P1dB(dBm)	6
Supply Current (mA)	23
Supply Voltage (V)	+5.0

1) IIP3 is measured with two tones at an output power of -8 dBm/tone separated by 1MHz

Schematic

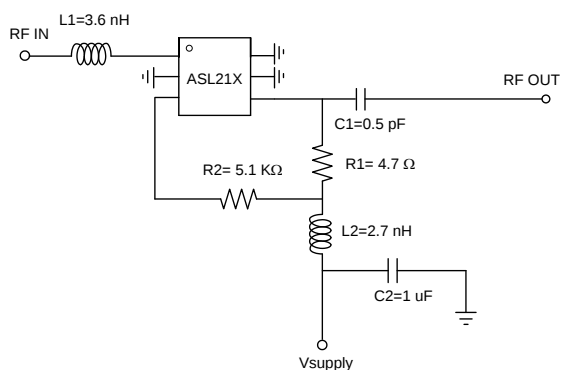

Board Layout (FR4, 20x20 mm², 0.8T)

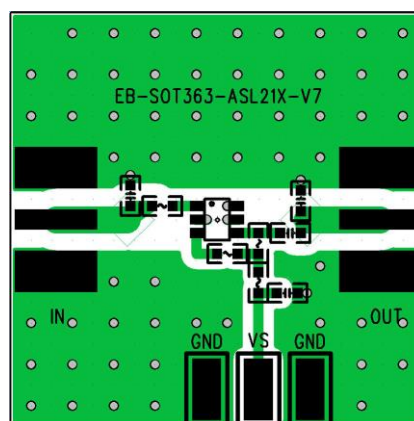

S-parameters & K-factor

