


Revisions		Approved	Date
Description/Approval/Date	M.H.		01/23/03
	Checked	M.H.	01/23/03
	Drawn	K.R.E.	01/23/03

Tolerances			
1-20	=+/-0.2		
20-30	=+/-0.3		
30-40	=+/-0.4		
40-50	=+/-0.5		
50-100	=+/-0.75		
100-300	=+/-1.5		
Angles	=+/-1		

Dimensions are in Millimeters

NOTES (plating thickness in microinches):			
1. Per QQ-B-626	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike	
2. Per QQ-S-764	7. Per WW-1-799	10. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750			

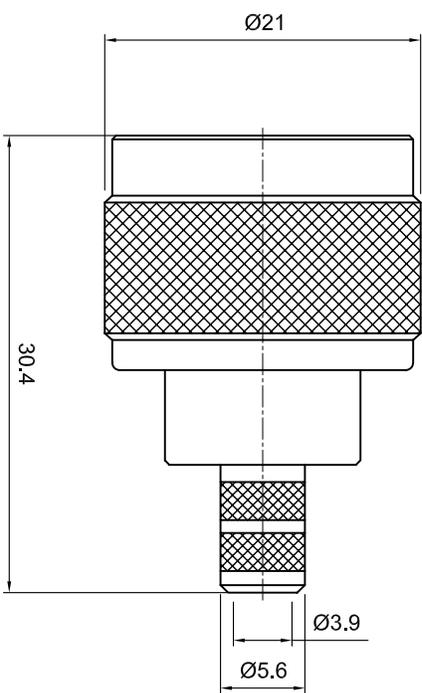

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact:	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

 Lighthorse Technologies, Inc. 9511 Ridgelyaven Ct, Ste. B San Diego, California 92123 Part Number: LT1-7NSM11NT-59	Description
	N Plug for RG 59 cable. 75 ohm, Nickel plated
Scale	1:1
Drawing No.	7NSM11NT-59
File Name	7NSM11-59