


CONTACT: BREAK BEFORE MAKE
ACTUATOR: LATCHING
SWITCHING SPEED: 20 mSEC MAX


ACTUATOR VOLTAGE: 12.0±3.0 Vdc
ACTUATOR CURRENT: 0.200 A MAX @ 12.0 Vdc
POWER HANDLING: 200W CW @ 1.0 GHz

OPERATING TEMP: -54°C TO +90°C
SINE VIBRATION: 30 G'S rms
LIFE: 1,000,000 CYCLES
RANDOM VIBRATION: 20 G'S rms

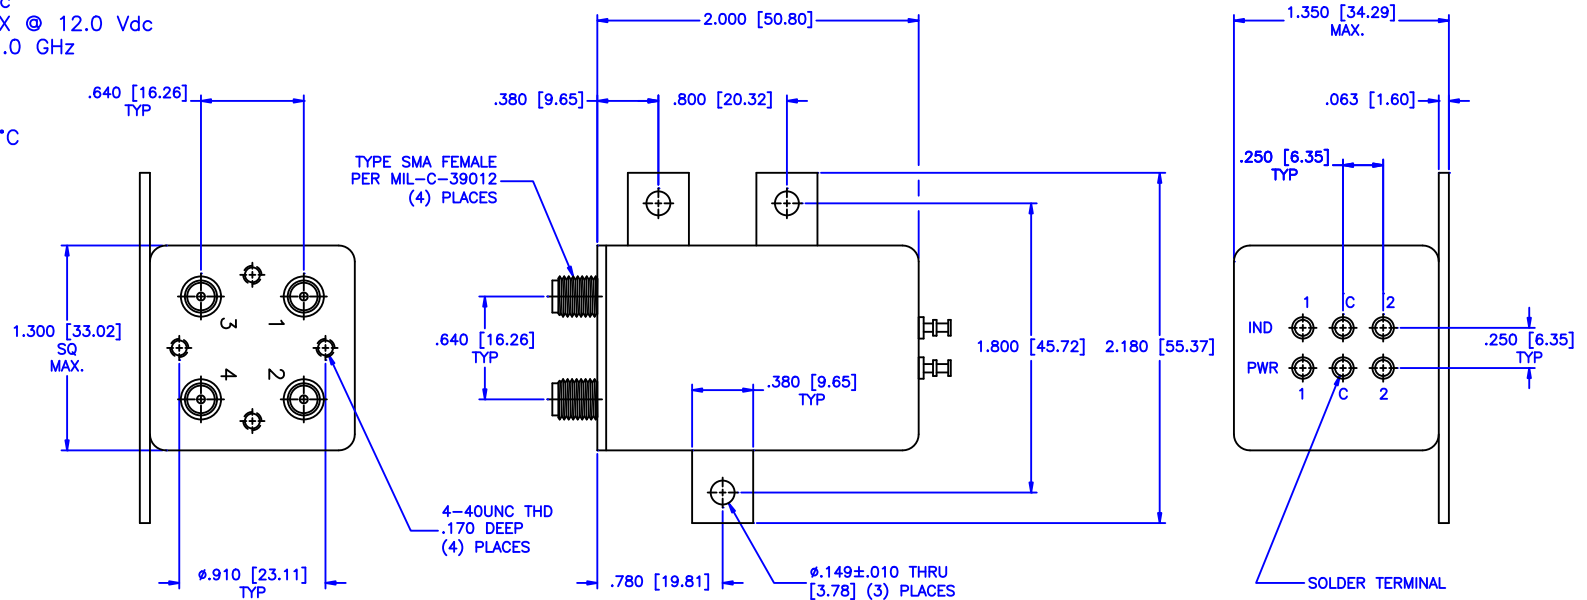


FREQUENCY RANGE (GHz): DC-2.0 2.0-4.0 4.0-8.0 8.0-12.4 12.4-18.0

VSWR (Max.):	1.20:1	1.25:1	1.30:1	1.40:1	1.50:1
INSERTION LOSS (dB):	0.20	0.25	0.30	0.40	0.50
ISOLATION (dB):	90	80	80	70	60
IMPEDANCE (Ohms):	50				

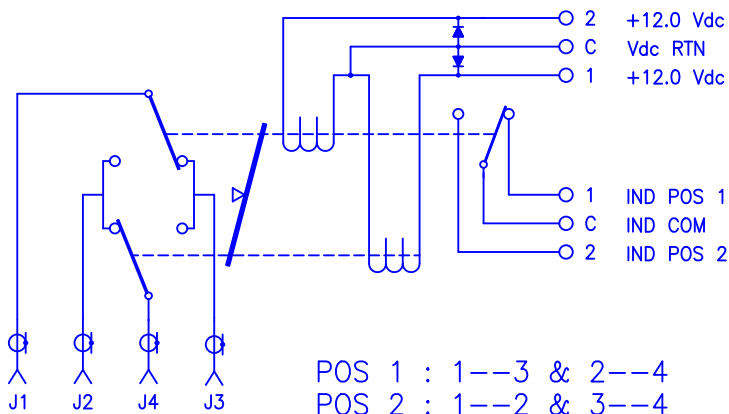

POS 1 : 1--3 & 2--4
POS 2 : 1--2 & 3--4

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 4255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: ELECTROMECHANICAL SWITCHES	
		PART NO. C1-7-LIS/12			
DRAWN: Paiboon Luekhamhan	DATE: 03-31-2001	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE: N/A
APPROVED: T. Nguyen	DATE: 03-31-2001	THIRD ANGLE PROJECTION 		OD2L5	REV: N/A DO NOT SCALE THE DRAWING
				DWG NO. 82263	