


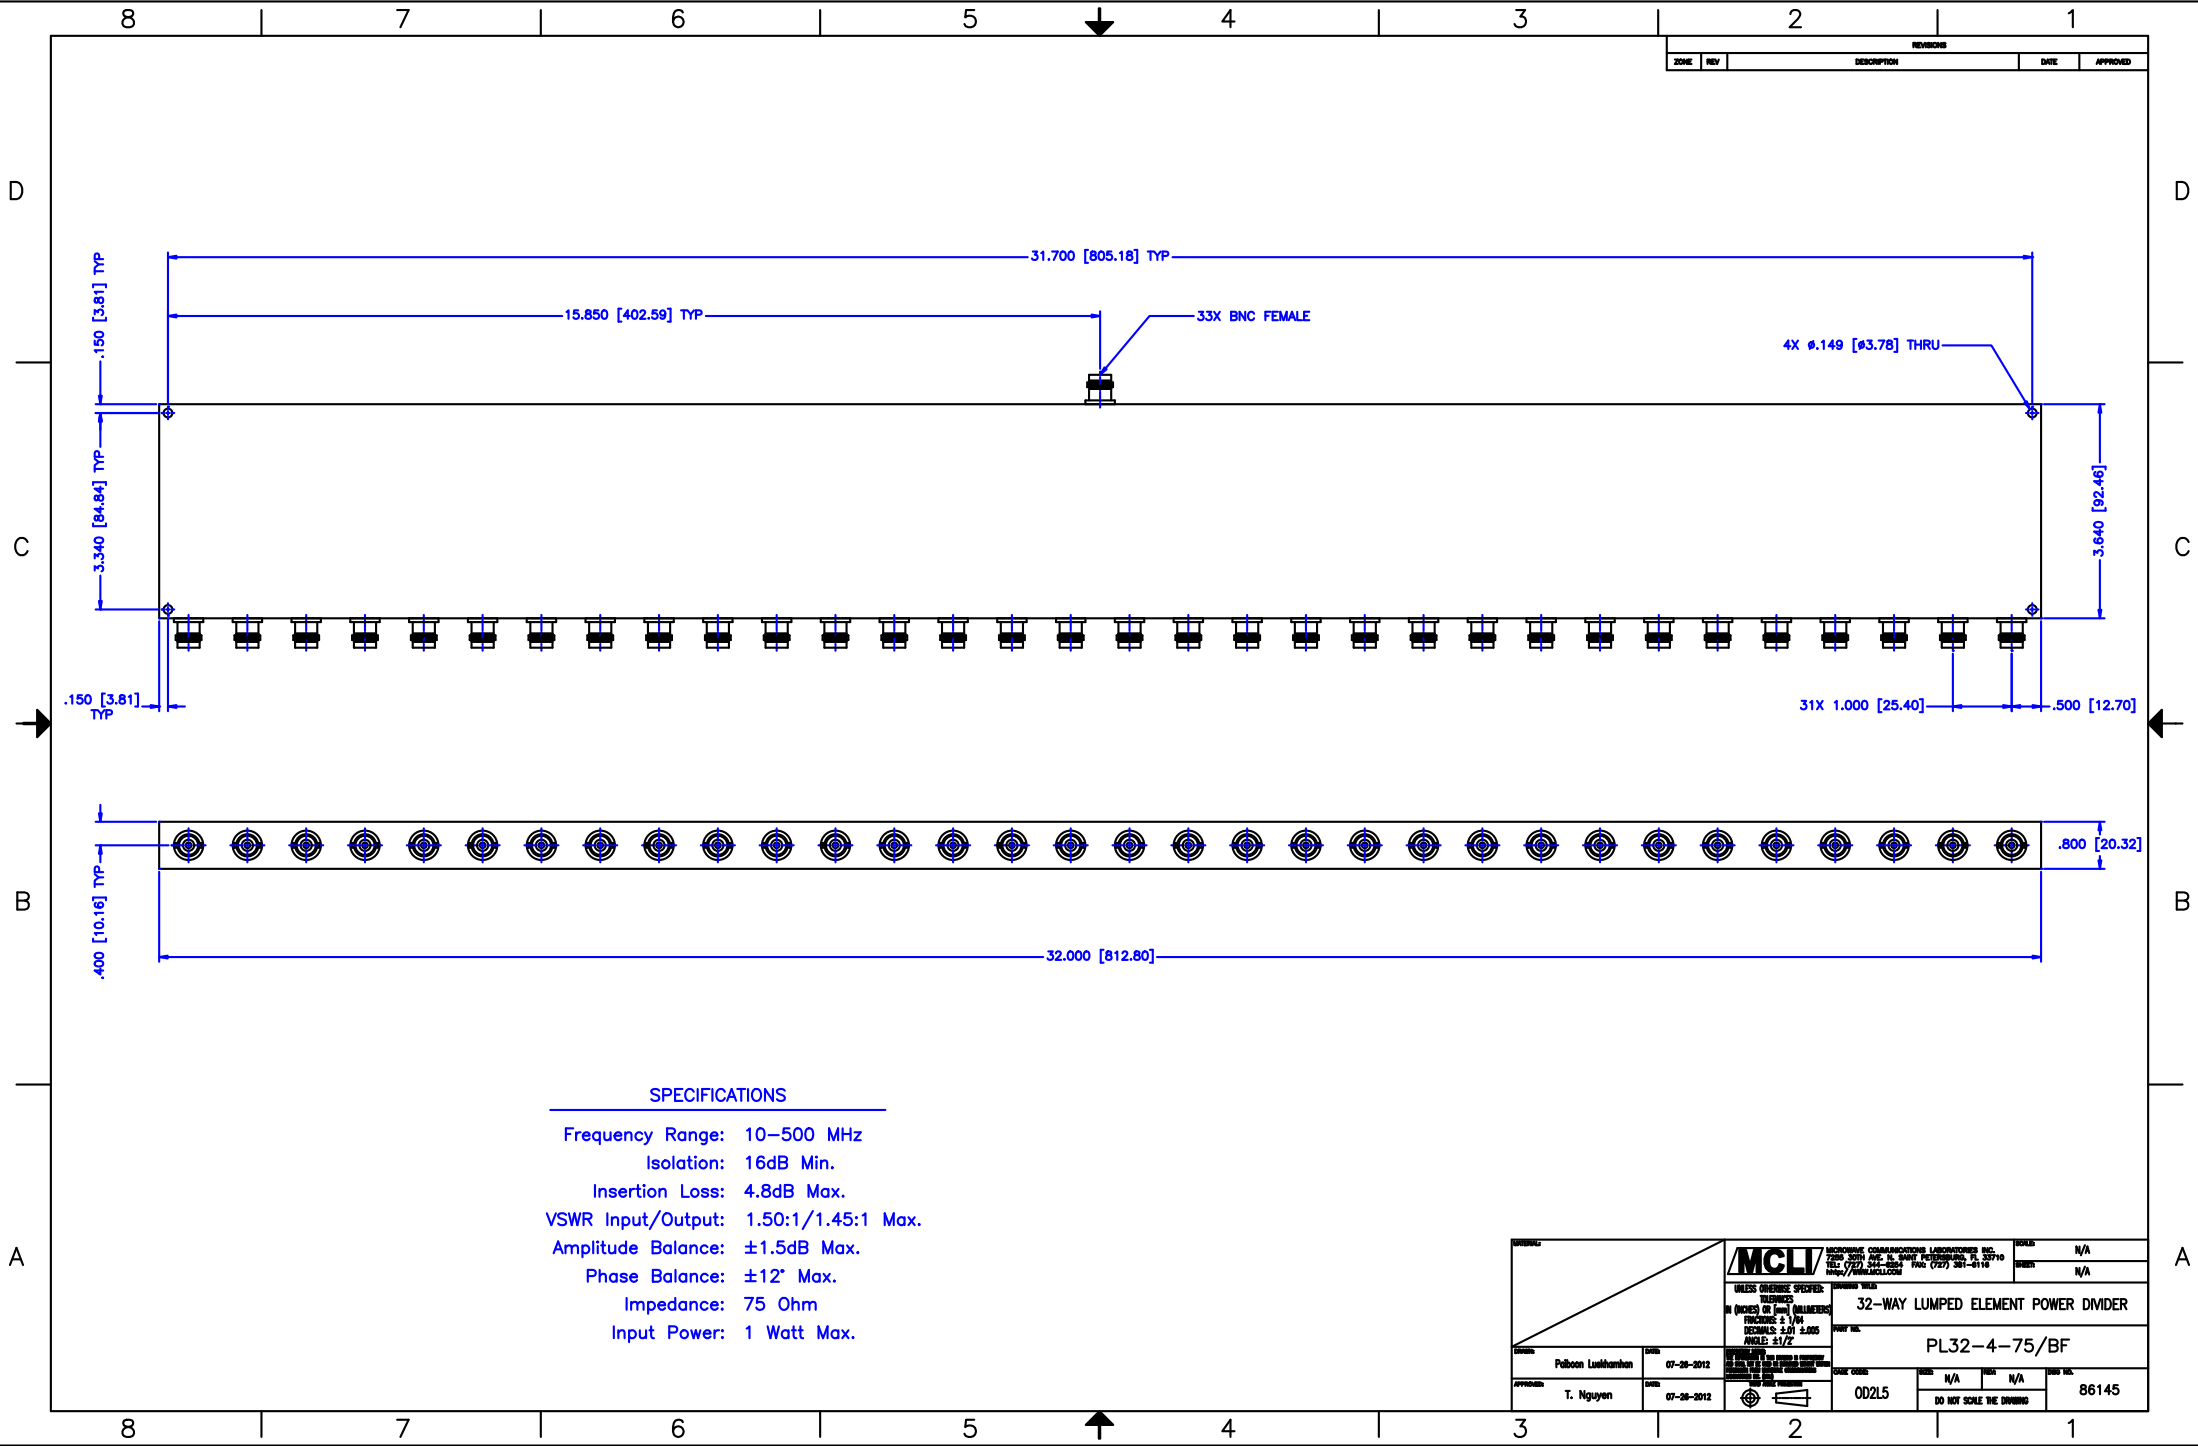

SPECIFICATIONS

- Frequency Range: 10–500 MHz
- Isolation: 16dB Min.
- Insertion Loss: 4.8dB Max.
- VSWR Input/Output: 1.50:1/1.45:1 Max.
- Amplitude Balance: ± 1.5 dB Max.
- Phase Balance: $\pm 12^\circ$ Max.
- Impedance: 75 Ohm
- Input Power: 1 Watt Max.

		MICROWAVE COMMUNICATIONS LABORATORIES, INC.		DATE	N/A
		7200 20TH AVE. S.W. SUITE 1000, BURNABY, B.C. V5A 3P7 TEL: (778) 336-1100 FAX: (778) 381-8118 WWW.MCL1.COM		REV	N/A
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN (INCHES OR [mm]) DIMENSIONS FRACTIONS $\pm 1/16$ DECIMALS $\pm .005$ HOLE: $\pm 1/2$		32-WAY LUMPED ELEMENT POWER DIVIDER		PART NO.	
DESIGNED BY: Poloon Luethamman		DATE: 07-26-2012		PL32-4-75/BF	
APPROVED BY: T. Nguyen		DATE: 07-26-2012		DATE ORDERED	N/A
				DATE	N/A
				DO NOT SCALE THE DRAWING	86145