

SMB PLUG PCB RA

SC8856


SPECIFICATIONS

ELECTRICAL
FREQUENCY: 0-4 GHZ
IMPEDANCE: 50 OHMS

ENVIRONMENTAL
-55°C TO +120 °C

MATERIALS
BODY: NICKEL PLATED BRASS
CONTACTS: BeCu
CONTACT PLATING: Au 30 μ-in
CENTER CONTACTS: NICKEL PLATED BRASS
INSULATOR: TEFLON
INTERFACE: MIL-STD-883

ROHS COMPLIANT

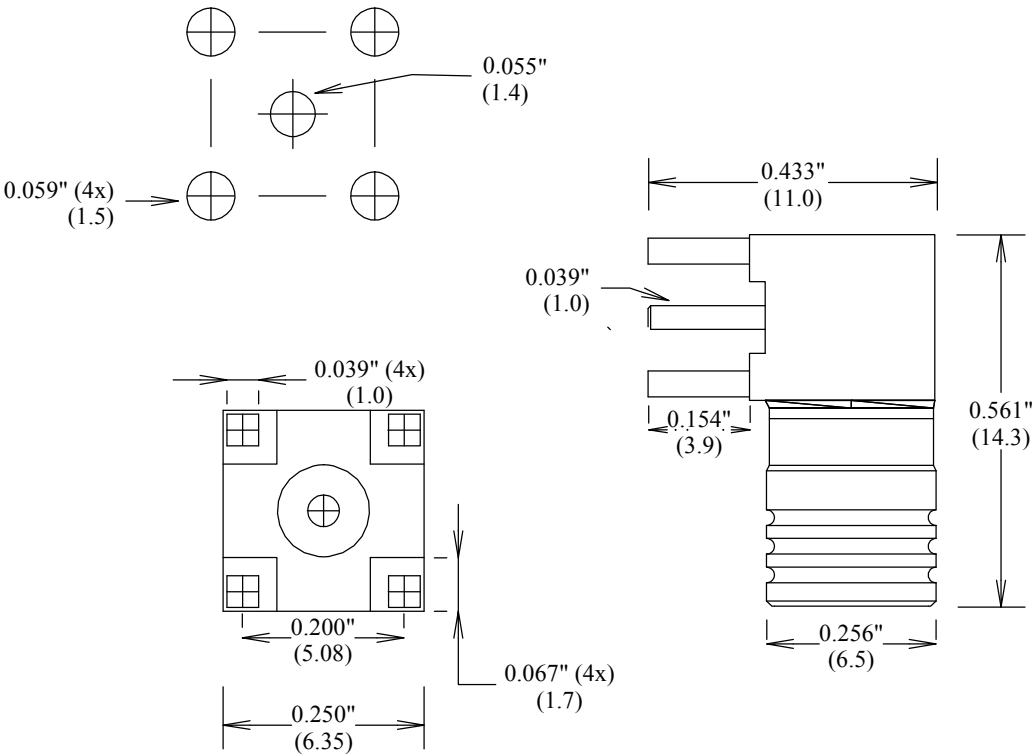

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMB PLUG PCB RA

SIZE

A

CAGE CODE

3FKR5

DWG NO

SC8856

REV

A

ALL DIMENSIONS IN inches(MM) Typical

SCALE

SHEET