


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

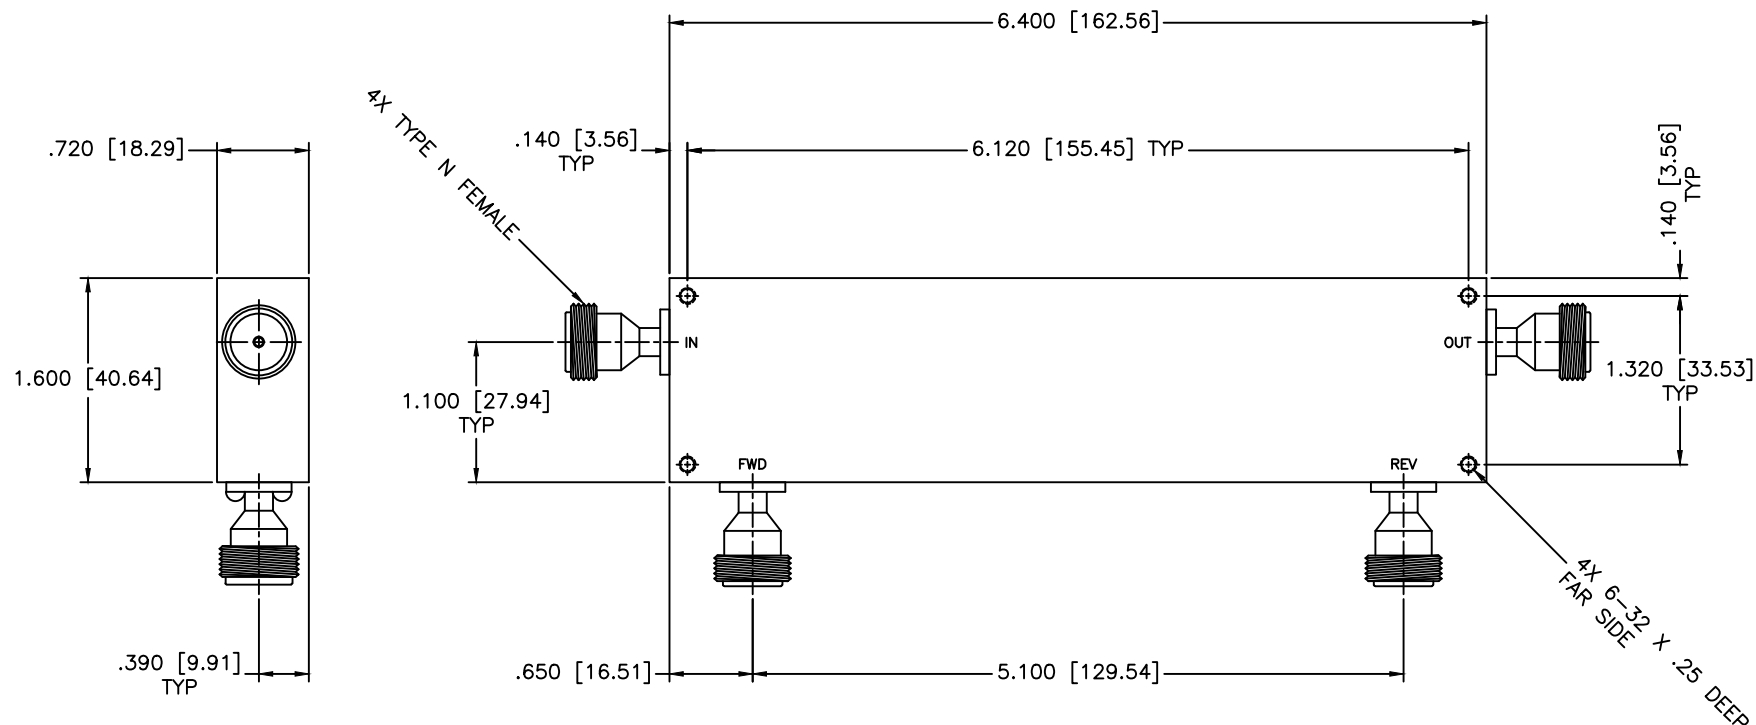

SPECIFICATIONS

FREQUENCY RANGE: 200–2000 MHz
 COUPLING: 10dB Nom.
 FLATNESS: ± 1.0 dB Max.
 INSERTION LOSS: 0.3dB Max.
 DIRECTIVITY: 20dB Min.
 VSWR: 1.25:1 Max.
 POWER: 200W CW

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan	DATE: 03-26-1999	DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER		
APPROVED: T. Nguyen	DATE: 03-26-1999	PART NO. HDL-41-10		
		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 83856