



Absorptive 0.02-18GHz Coaxial SP8T Switch



Features

- Ultra Wide Band Operation 0.02-18GHz
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -45°C~+85°C
- Customization available upon request
- Hermetically sealed package up to 60,000ft available upon request.

Electrical Specifications, TA = +25° C, With Vdd = +5V, Vss = -5V & VCTL = 0/ +5V

Description	PN: RFSP8TA0018G									
	SP8T Absorptive Switch									
	Low Power Cold Switching									
Parameters	Min	Typ.	Max	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range	0.02-6			6-12			12-18			GHz
Insertion Loss		2.5	5		3.8	5		5.8	6	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/°C
Isolation	60	85		80	85		80	82		dB
Input VSWR		1.5	2		1.5	2		1.5	2	
Output VSWR		1.5	2		1.5	2		1.5	2	
RF Input power (CW)			1			1			1	W
Power Dissipation (CW)		0.3			0.3			0.3		W
IM3		40			40			40		dBc
IIP3		50			50			50		dBm
0.1dB Compression Po.1dB		30			30			30		dBm
Switching Speed			250			250			250	ns
Weight	3-53									ounces
Impedance	50									Ω
Biasing(+5V/-5V)	350/50									mA
Input /Output Connector	SMA-Female/SMA-Female (Standard)									
Finishing	Gold Plating									
Material	Aluminum									
Seal	Hermetically Sealed (optional)									



RF-LAMBDA

LEADER OF BROADBAND SOLUTIONS

RFSP8TA0018G

Absolute Maximum Ratings

Biasing	+5V±10%/-5V±10%
TTL Control Voltage	0~0.8V/2~5V
Operating Temperature(°C)	-45 ~ +85
Storage Temperature(°C)	-50 ~ +125

Ordering Information


Part No	ECCN	Description
RFSP8TA0018G	EAR99	SP8T 0.02-18GHz PIN Diode Switch

Environment specifications


Operational Temperature (°C)	-45 ~ +85
Storage Temperature (°C)	-50 ~ +125
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msc half sin wave,3 axis both directions

Typical performance plots


Insertion Loss

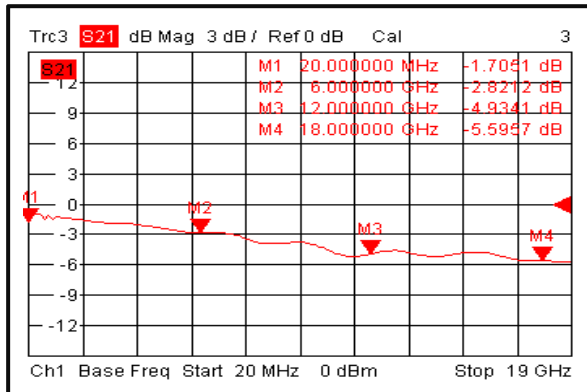


Input VSWR

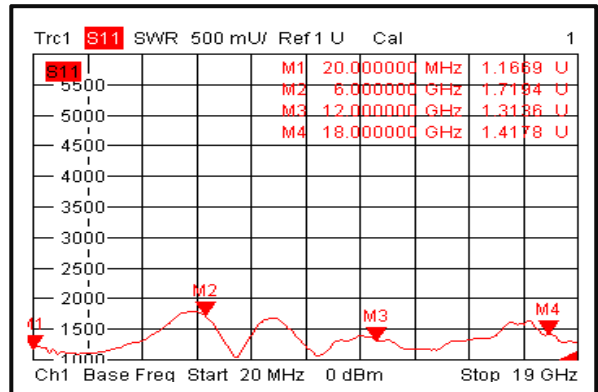

Output VSWR

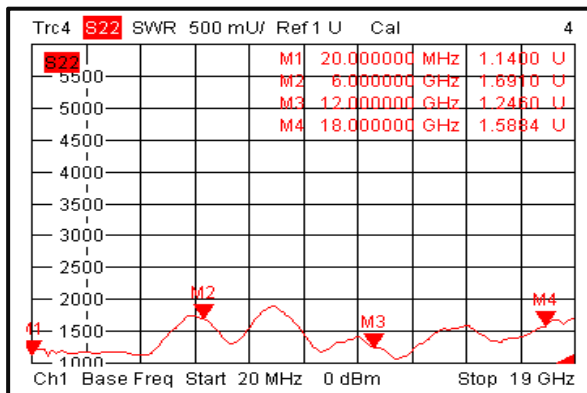

Isolation

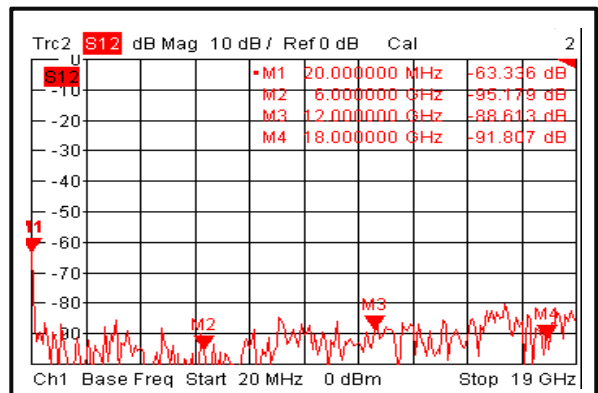

Absorptive Coaxial Single Pole Eight Throw Switch 0.02-18GHz

