



Standards
NF C 96-315
MIL-DTL-39030

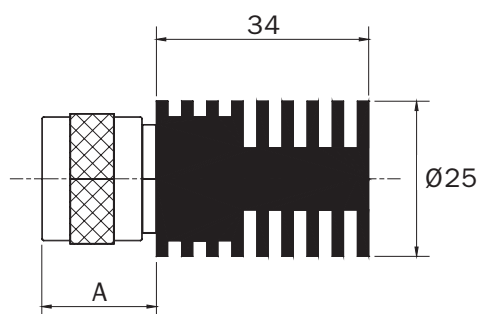

Impedance	$50 \Omega \pm 2\%$
Frequency	DC - 5 GHz
Max VSWR	≤ 1.10 at 2 GHz, ≤ 1.20 at 4 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	10 W
Peak power	1 kW
Weight	130 g



Dimensions in mm

P/N	Connector	A
17-0193	N m	18
17-0254	N f	16