



TNC Female Bulkhead Connector Solder Attachment
Solder Cup Terminal, .350 inch D Hole

TECHNICAL DATA SHEET

PE4065

Configuration

Connector	TNC Female
Connector Specification	MIL-STD-348A
Connector Interface Type	Solder Cup
Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	Bulkhead

Electrical Specifications

Frequency Range	DC to 11 GHz
Impedance	50 Ohms
Maximum Operating Voltage	500 Volts

Mechanical Specifications

Temperature	
Operating Range	-65 to +165 deg C

Size

Length	1.118 in [28.4 mm]
Width/Dia.	0.492 in [12.50 mm]
Weight	0.013 lbs [5.9 g]

Connector

Type	TNC Female
Contact Material and Plating	Brass, Gold
Contact Plating Specification	30μ in. minimum
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)


RoHS Compliant	
REACH Compliant	6/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole PE4065](#)

PE4065

PE4065 CAD Drawing

TNC Female Bulkhead Connector Solder Attachment
Solder Cup Terminal, .350 inch D Hole

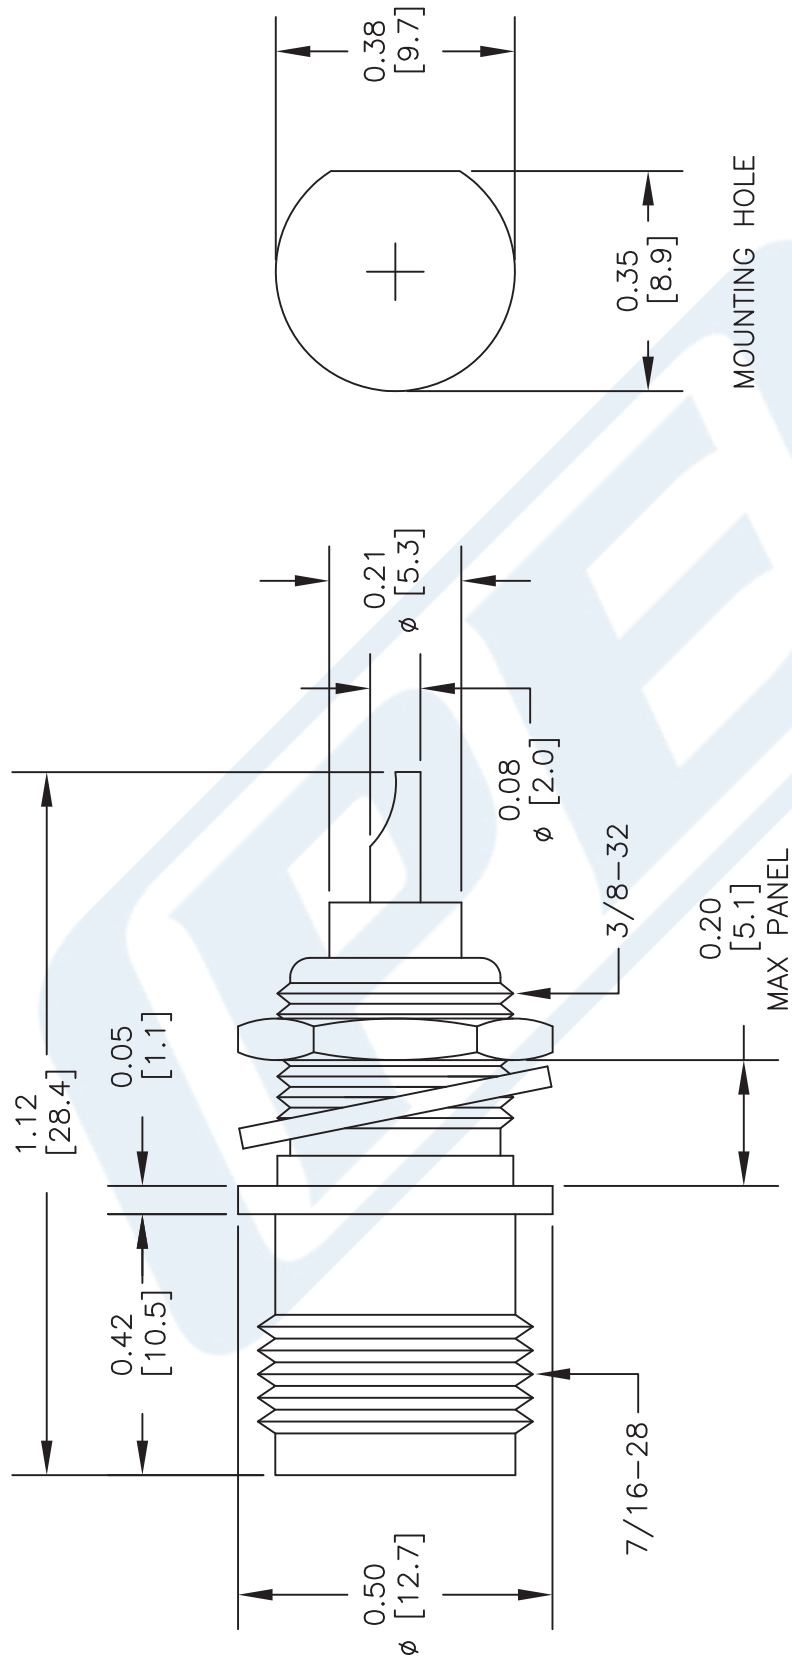

DWG TITLE

PE4065

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 010413-A

SCALE N/A

SIZE A

2233

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com