

MINI SMP-F TERMINATION 18 GHZ

ST1871



SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-18 GHZ
IMPEDANCE: 50 OHMS
VSWR 1.35:1 MAX @ 18GHZ
VSWR 1.5 @ 26 GHZ TYPICAL
POWER HANDLING .25 WATT MAX

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACTS: BeCu
PLATING: Au PER MIL-G-45204
INSULATOR: PTFE
OP. TEMP RANGE: -55° to +125°C
ROHS COMPLIANT

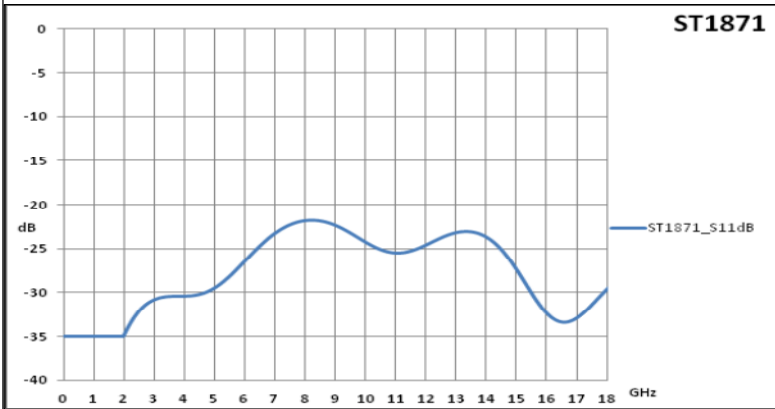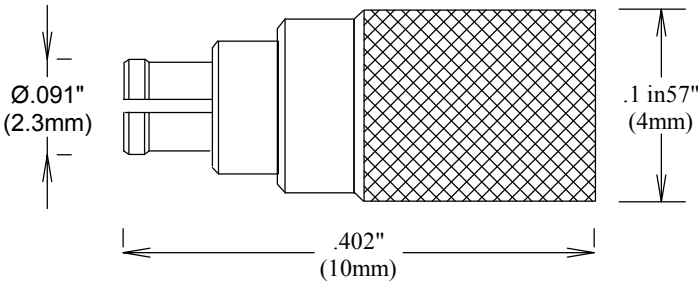

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

MINI SMP-F TERMINATION 18 GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	ST1871	A
SCALE	SHEET		