




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

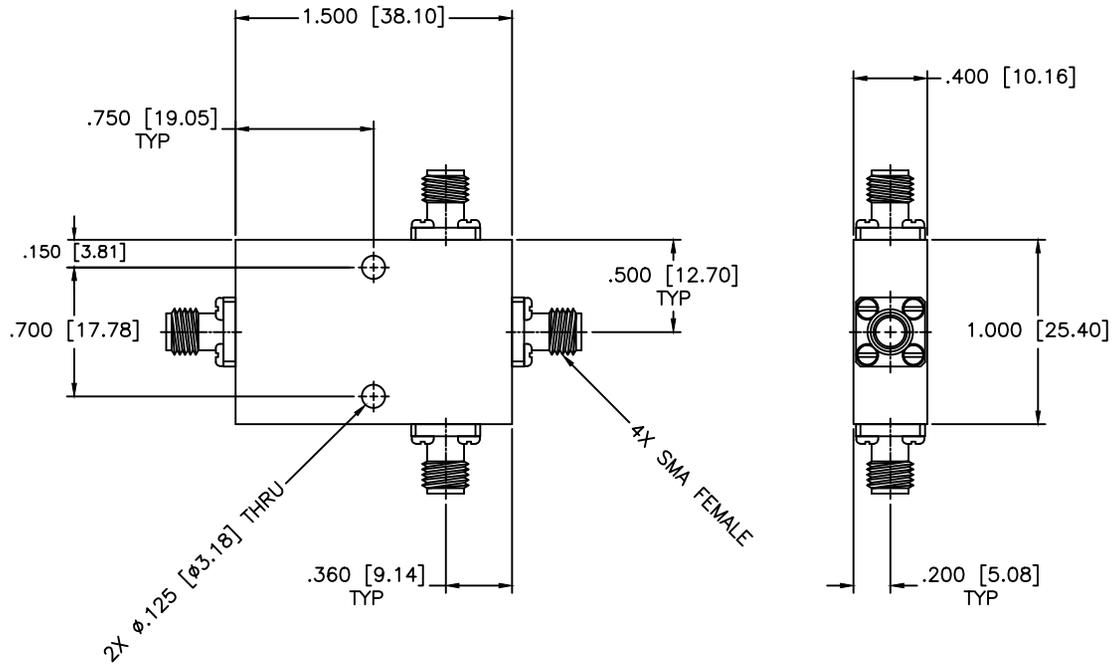

**SPECIFICATIONS**

Frequency Range: 8–12.4 GHz  
 Insertion Loss: 0.9dB Max.  
 Isolation: 15dB Min.  
 VSWR Input/Output: 1.70:1/1.60:1 Max.  
 Phase Balance:  $\pm 10$  Deg. Max.  
 Amplitude Balance:  $\pm 0.5$ dB Max.  
 Power: 20W (Load vswr@1.2)  
 Operating Temperature:  $-25^{\circ}\text{C}$  to  $+55^{\circ}\text{C}$

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$			DRAWING TITLE: <b>3-WAY POWER DIVIDER</b>		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 06-07-1999		PART NO.: PS3-10	
APPROVED: T. Nguyen		DATE: 06-07-1999		CAGE CODE: 0D2L5	SIZE: A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)				REV: N/A	DWG NO.: 80092
DO NOT SCALE THE DRAWING					

