

D

C

B


A

D

C

B

A

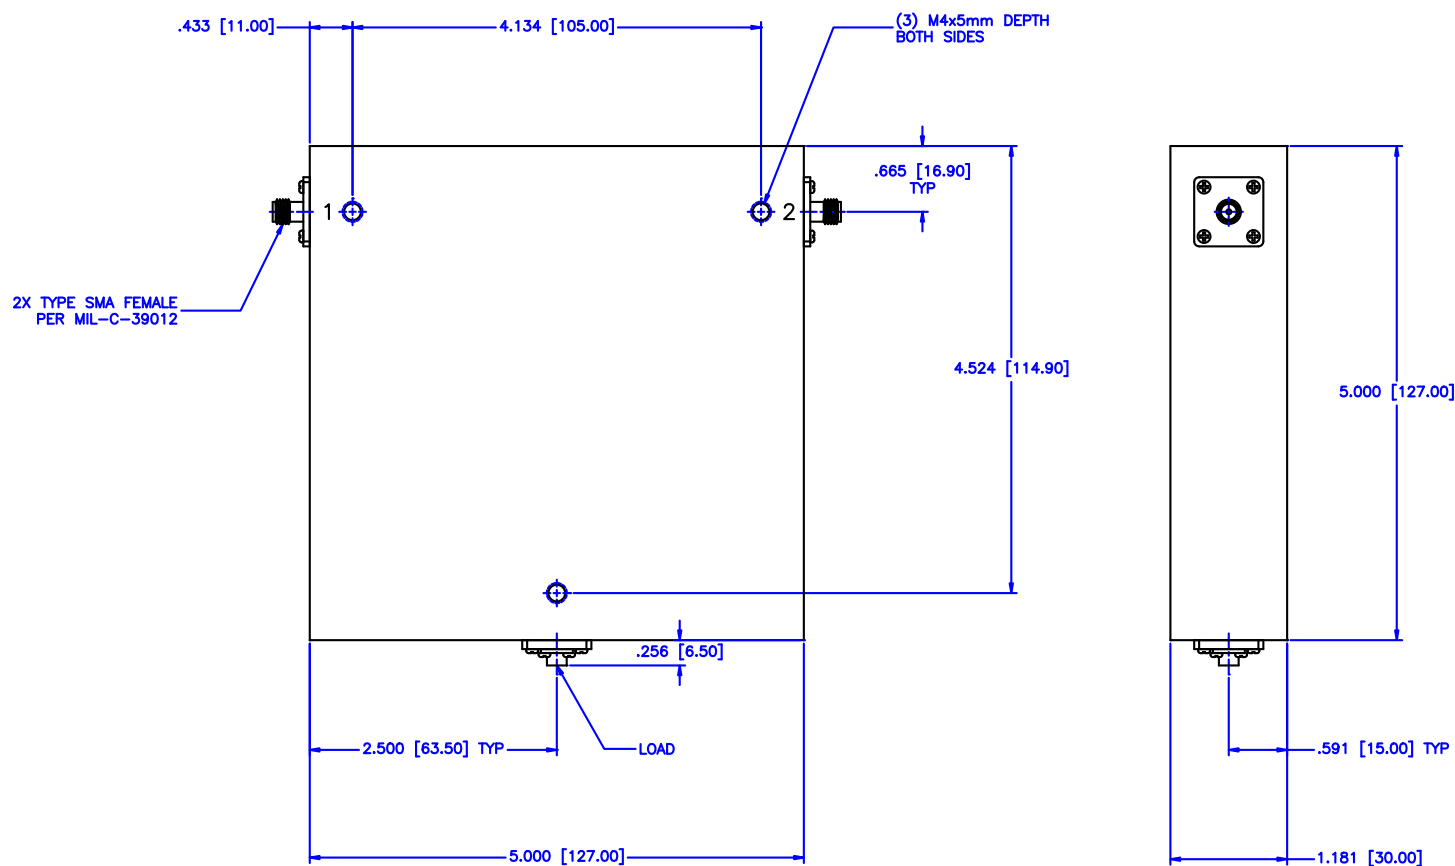

SPECIFICATIONS

Frequency Range: 600–900 MHz
Isolation: 20dB Min.
Insertion loss: 0.5dB Max.
VSWR: 1.20:1 Max.
Operating Temperature: +10°C to +40°C
Clockwise Direction
Average Power: 1 Watt
Peak Power: 100 Watts

DRAWING TITLE		COAXIAL ISOLATOR	
PART NO.		IS-192	
DATE		01-16-2013	
DRAWN		T. Nguyen	
APPROVED		T. Nguyen	
MATERIAL		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-8254 FAX: (727) 381-0110 http://www.mcll.com	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.005 ANGLE: ± 1/2°		SCALE: N/A SHEET: N/A	
DATE CODE		0D2L5	
SIZE		C	
REV		N/A	
DO NOT SCALE THE DRAWING		86202	