


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

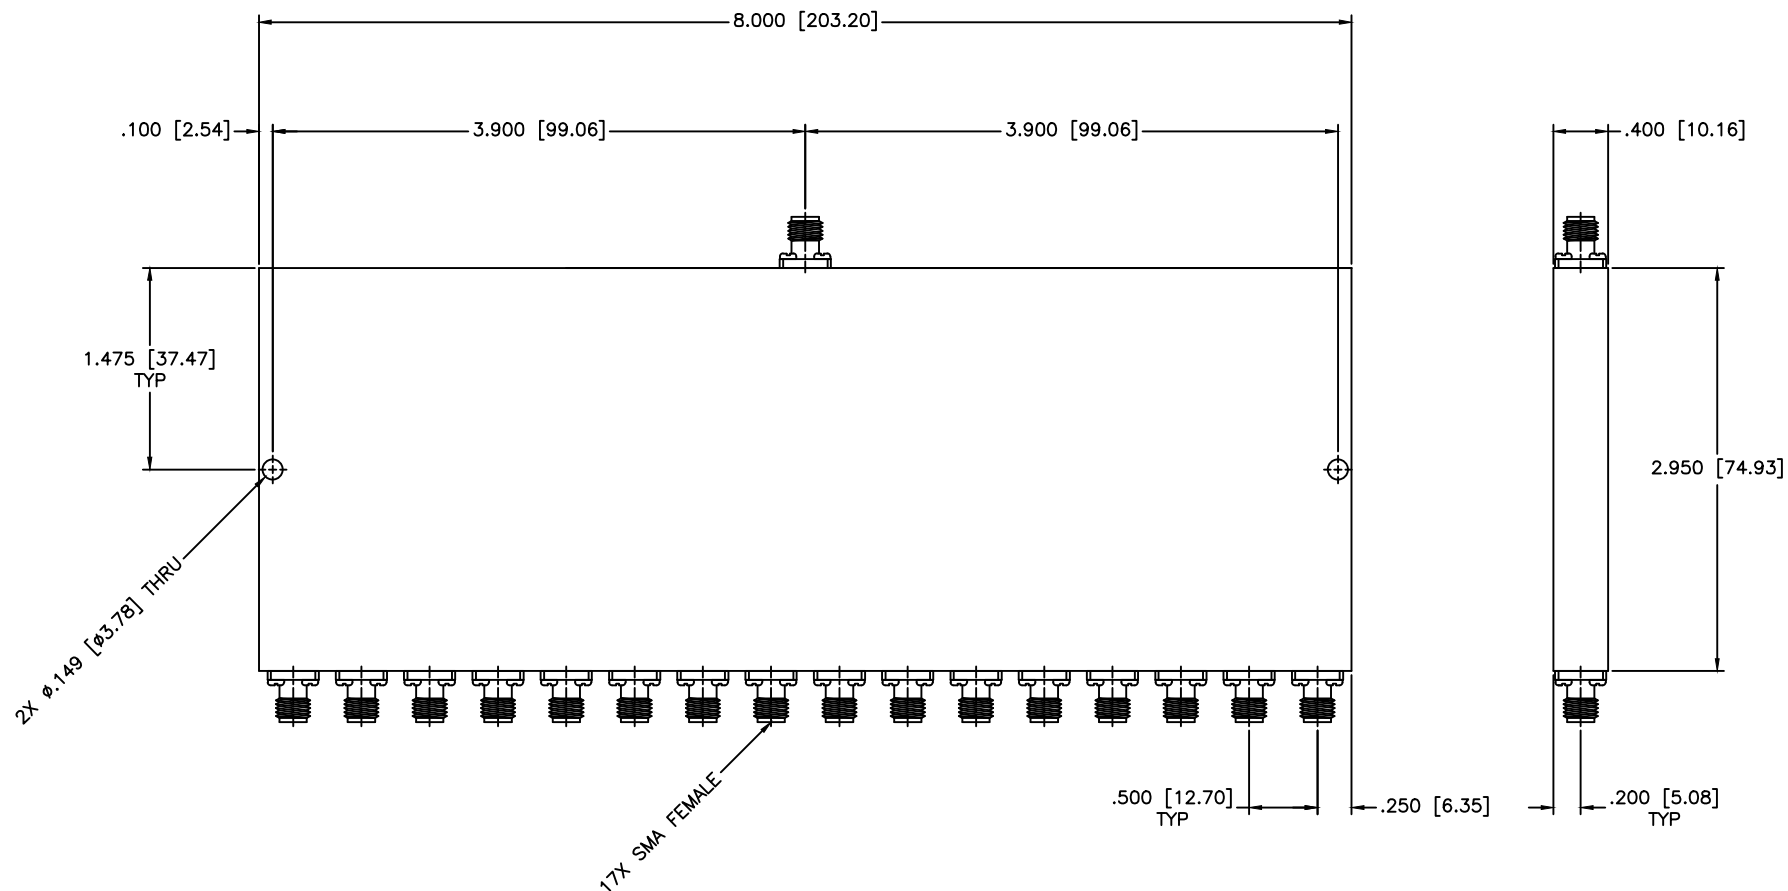

SPECIFICATIONS

Frequency Range: 5–18 GHz
 VSWR: 1.75:1 Max.
 Amplitude Balance: ± 1.0 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Insertion Loss: 4.9dB Max.
 Isolation: 14dB Min.
 Power: 10W (Load vswr @ 1.2)

MATERIAL: DRAWN: Paiboon Luekhamhan DATE: 10-06-2008		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
APPROVED: T. Nguyen DATE: 10-06-2008		DRAWING TITLE: 16-WAY POWER DIVIDER		
		PART NO. PS16-10		
		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 83931

