



2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz,
Low Noise Amplifier, 32 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1007

PE15A1007 is a wideband low noise RF coaxial amplifier operating in the 9 kHz to 3 GHz frequency range. The amplifier offers 2.5 dB typical noise figure, 16 dBm of P1dB and high 32 dB minimum small signal gain with gain flatness of ± 1.5 dB maximum. This exceptional technical performance is achieved through the use of hybrid MIC design and advanced SiGe Bipolar devices. The low noise amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation. This low noise amplifier requires only a single positive supply, is unconditionally stable and operates over the temperature range of -40°C and +85°C.

Features

- 9 kHz to 3 GHz Frequency Range
- P1dB: 16 dBm
- High Small Signal Gain: 32 dB minimum
- Gain Flatness: ± 1.25 dB
- Gain Variance: ± 1 dB
- Noise Figure: 2.5dB typ
- Reverse Isolation: 65 dB
- 50 Ohm Input and Output Matched
- -40 to 85°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in Voltage Regulator

Applications

- Laboratory Applications
- R&D Labs
- Military Radio
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Military & Space
- Communication Systems
- Wireless Communication
- Microwave Radio Systems
- Cellular Base Stations
- Low Noise Amplifier
- General Purpose Amplification
- General Purpose Wireless
- Wideband Gain Block
- IF Amplifier/RF Driver Amplifier
- RF Wideband Front Ends
- RF Pre-amplification

Electrical Specifications (TA = +25°C, DC Voltage = 12Volts, DC Current = 110mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0		3	GHz
Small Signal Gain	32		36	dB
Gain Flatness		± 1.25	± 1.5	dB
Gain Variance at OTR*		± 1		dB
Output at 1 dB Compression Point	+15	+16		dBm
Output at 1 dB Compression Point	+15	+16		dBm
Noise Figure (10 MHz to 3 GHz)		2.5	3	dB
Input VSWR		1.6:1	2:1	
Output VSWR		1.8:1	2.5:1	
Reverse Isolation	60	65		dB
Spurious			-60	dBc
Operating DC Voltage		12		Volts
Operating DC Current	90	110	130	mA
Operating Temperature Range	-40		+75	°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz, Low Noise Amplifier, 32 dB Gain, SMA PE15A1007](#)



2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz,
Low Noise Amplifier, 32 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1007

*OTR= Base Plate Operating Temperature Range

Absolute Maximum Rating

Parameter	Rating	Units
Source Voltage	+15	Volts
RF input Power	+5	dBm
Operating Temperature (base-plate)	-55 to +125	°C
Storage Temperature	-40 to +85	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Mechanical Specifications

Size

Length

1.5 in [38.1 mm]

Width

0.85 in [21.59 mm]

Height

0.375 in [9.53 mm]

Input Connector

SMA Female

Output Connector

SMA Female

Environmental Specifications

Temperature

Operating Range

-40 to +75 deg C

Storage Range

-55 to +125 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz, Low Noise Amplifier, 32 dB Gain, SMA PE15A1007](#)





2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz,
Low Noise Amplifier, 32 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1007

Typical Performance Data

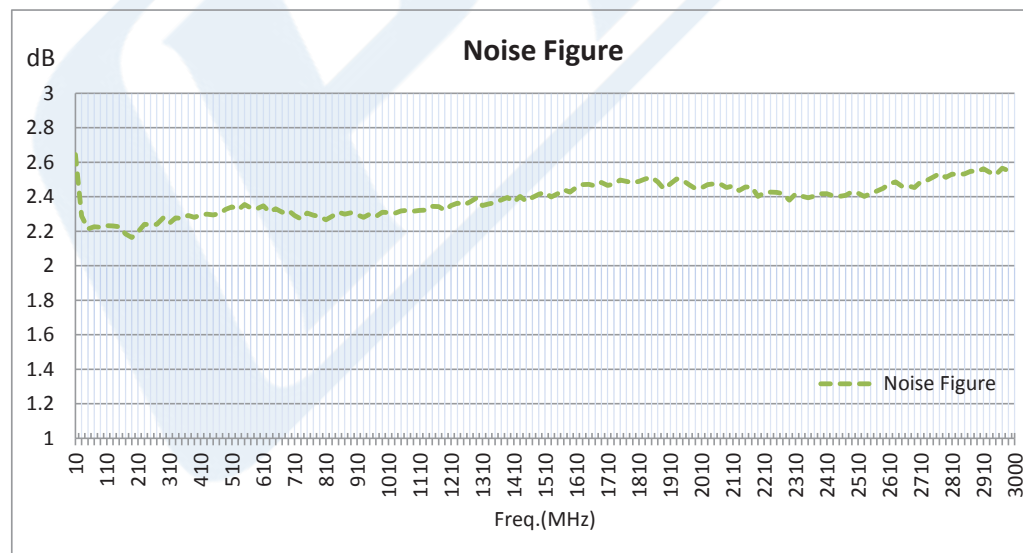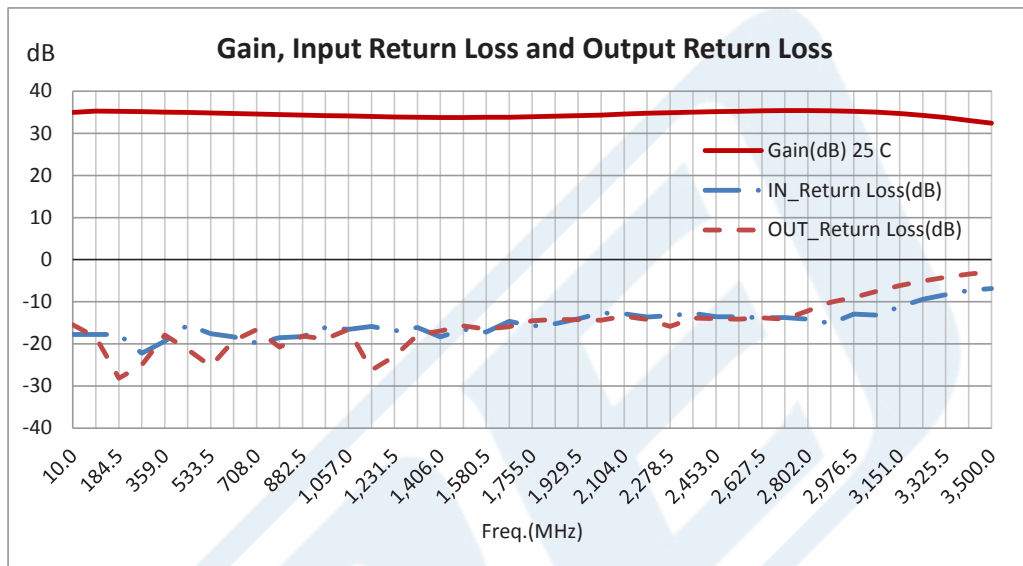

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz, Low Noise Amplifier, 32 dB Gain, SMA PE15A1007](#)



2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz,
Low Noise Amplifier, 32 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1007

2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz, Low Noise Amplifier, 32 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz, Low Noise Amplifier, 32 dB Gain, SMA PE15A1007](http://www.pasternack.com/2.5-db-3-ghz-low-noise-amplifier-32-db-gain-sma-pe15a1007-p.aspx)

URL: <http://www.pasternack.com/2.5-db-3-ghz-low-noise-amplifier-32-db-gain-sma-pe15a1007-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A1007 CAD Drawing

2.5 dB NF, 16 dBm P1dB, 0.009 MHz to 3 GHz, Low Noise Amplifier, 32 dB Gain, SMA

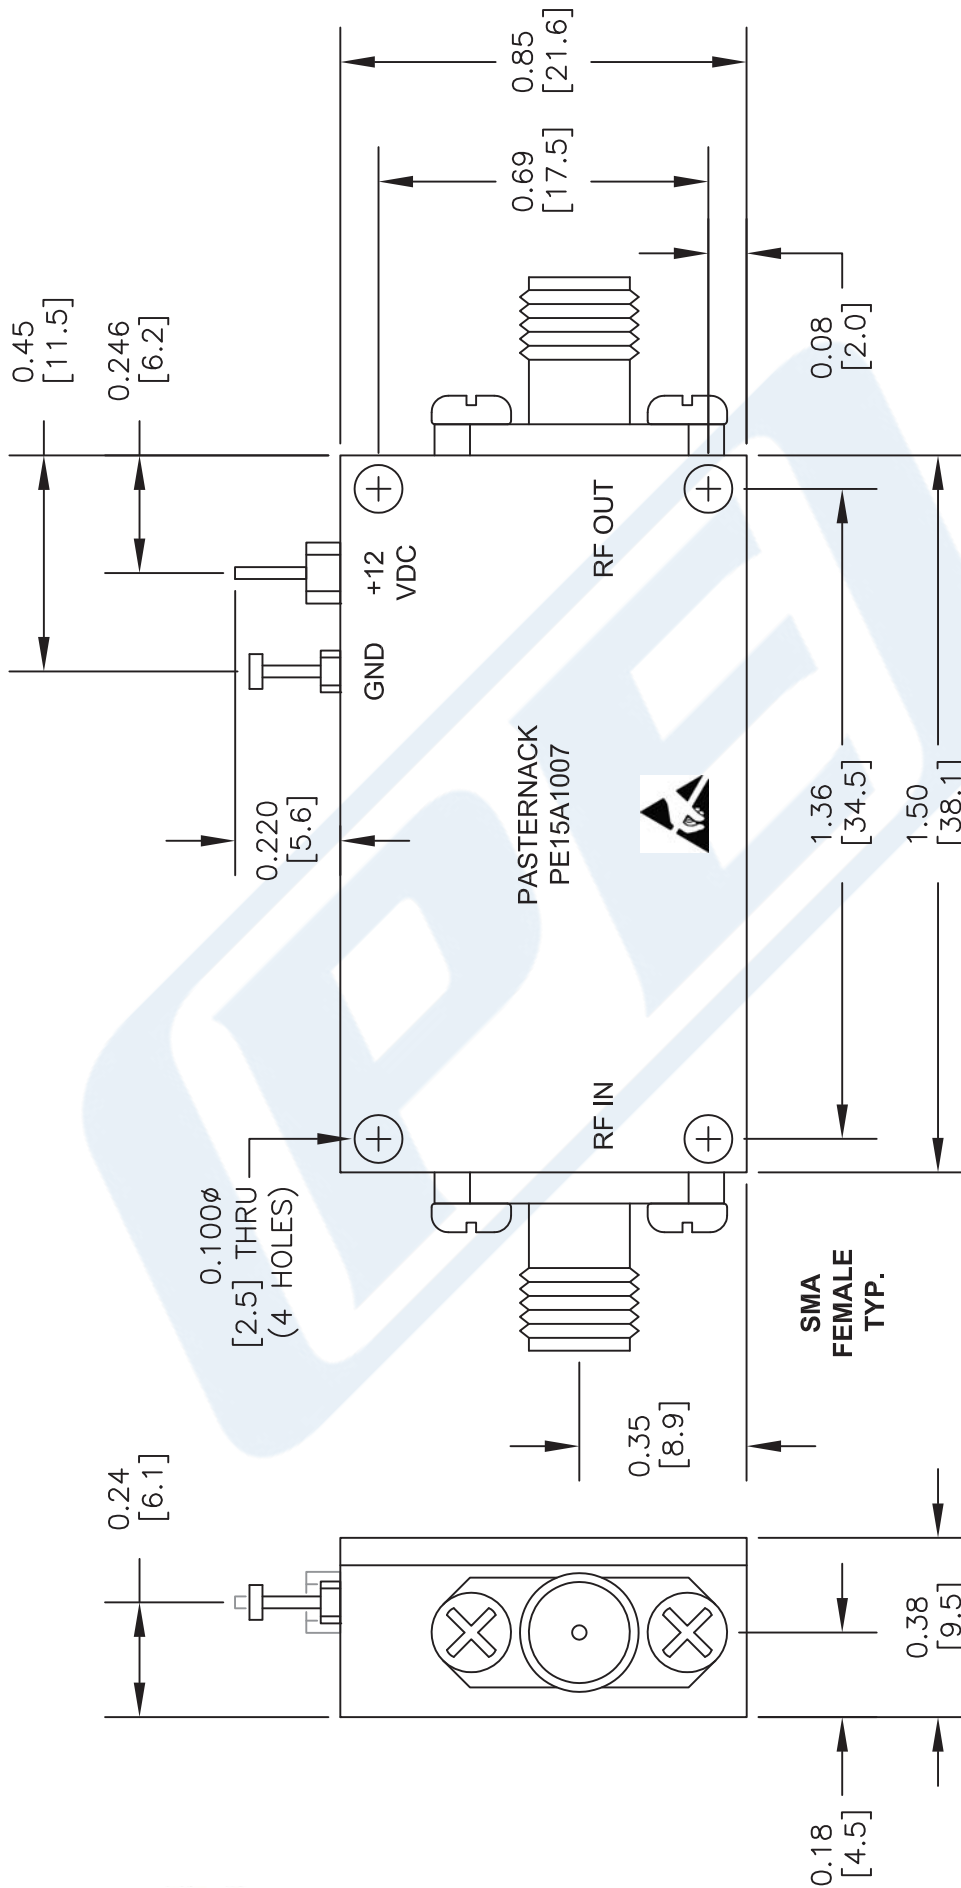

DWG TITLE

PE15A1007

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 090314

SCALE N/A

SIZE A

2233