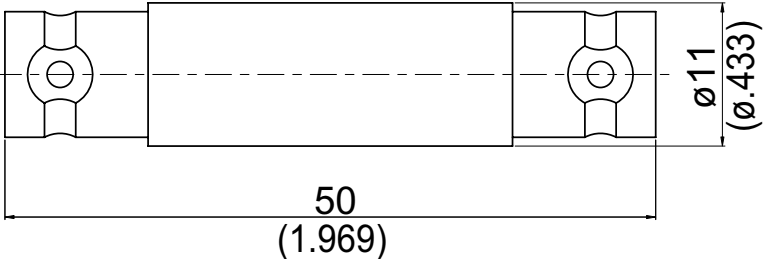


AD-V8V8	SHV Jack To SHV Jack		50Ω															
																		
TYPICAL VSWR: 1.2 up to 300 MHz.																		
<table><tr><th>Parts</th></tr><tr><td>Lock Washer</td></tr><tr><td>Contact Pin</td></tr><tr><td>Insulator</td></tr><tr><td>Body</td></tr></table>	Parts	Lock Washer	Contact Pin	Insulator	Body	<table><tr><th>Material</th></tr><tr><td>Brass</td></tr><tr><td>Brass</td></tr><tr><td>Teflon</td></tr><tr><td>Brass</td></tr></table>	Material	Brass	Brass	Teflon	Brass	<table><tr><th>Plating (Micro-inch)</th></tr><tr><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Gold 10 Over Nickel 50 Over Copper 50</td></tr><tr><td></td></tr><tr><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr></table>		Plating (Micro-inch)	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gold 10 Over Nickel 50 Over Copper 50		Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts																		
Lock Washer																		
Contact Pin																		
Insulator																		
Body																		
Material																		
Brass																		
Brass																		
Teflon																		
Brass																		
Plating (Micro-inch)																		
Tin-Zinc-Copper-Alloy 100 Over Copper 50																		
Gold 10 Over Nickel 50 Over Copper 50																		
Tin-Zinc-Copper-Alloy 100 Over Copper 50																		
Weight: 18.68 g																		

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.