

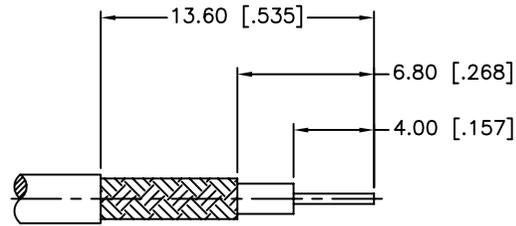


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/29/99	XXXXX	INITIAL RELEASE
A	06/24/10	XXXXX	UPDATE DRAWING FORMAT

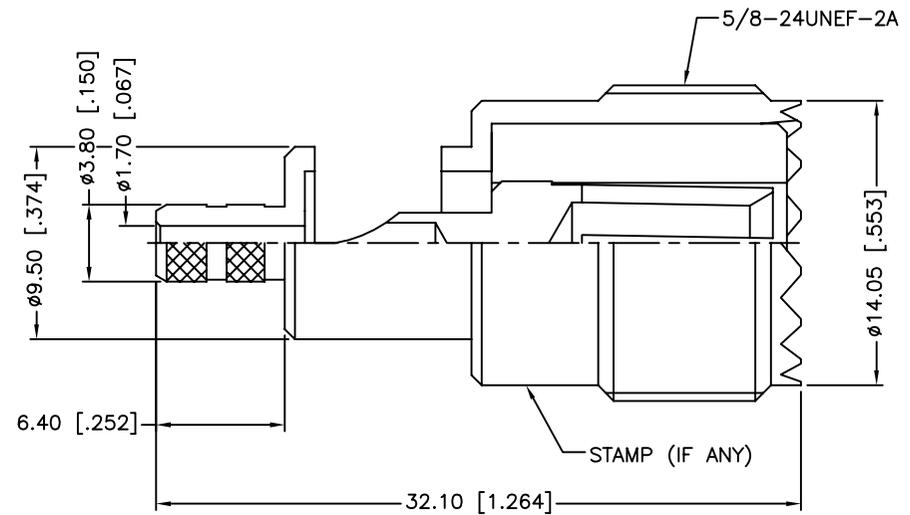

RECOMMENDED
CABLE STRIPPING DIM'S

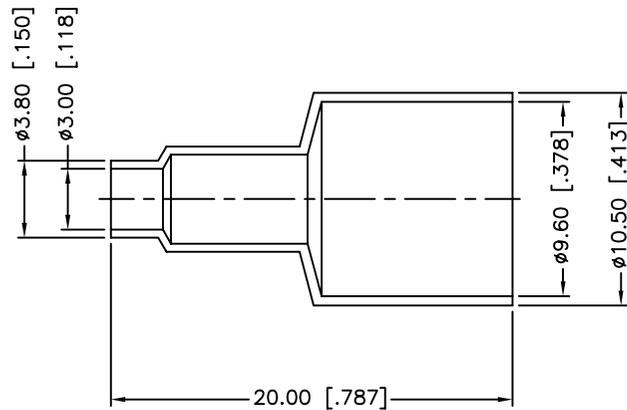

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER

DESCRIPTION	MATERIAL	FINISH	QTY
4 FERRULE	BRASS	NICKEL	1
3 CONTACT PIN	BRASS	GOLD	1
2 INSULATOR	DELTRIN	NATURAL	1
1 BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/24/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/182307.DWG	

Amphenol Connex

PART DESCRIPTION			
UHF CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			
PART NO.		182307	
DWG. NO.	182307.DWG	REV. A	SCALE NA