



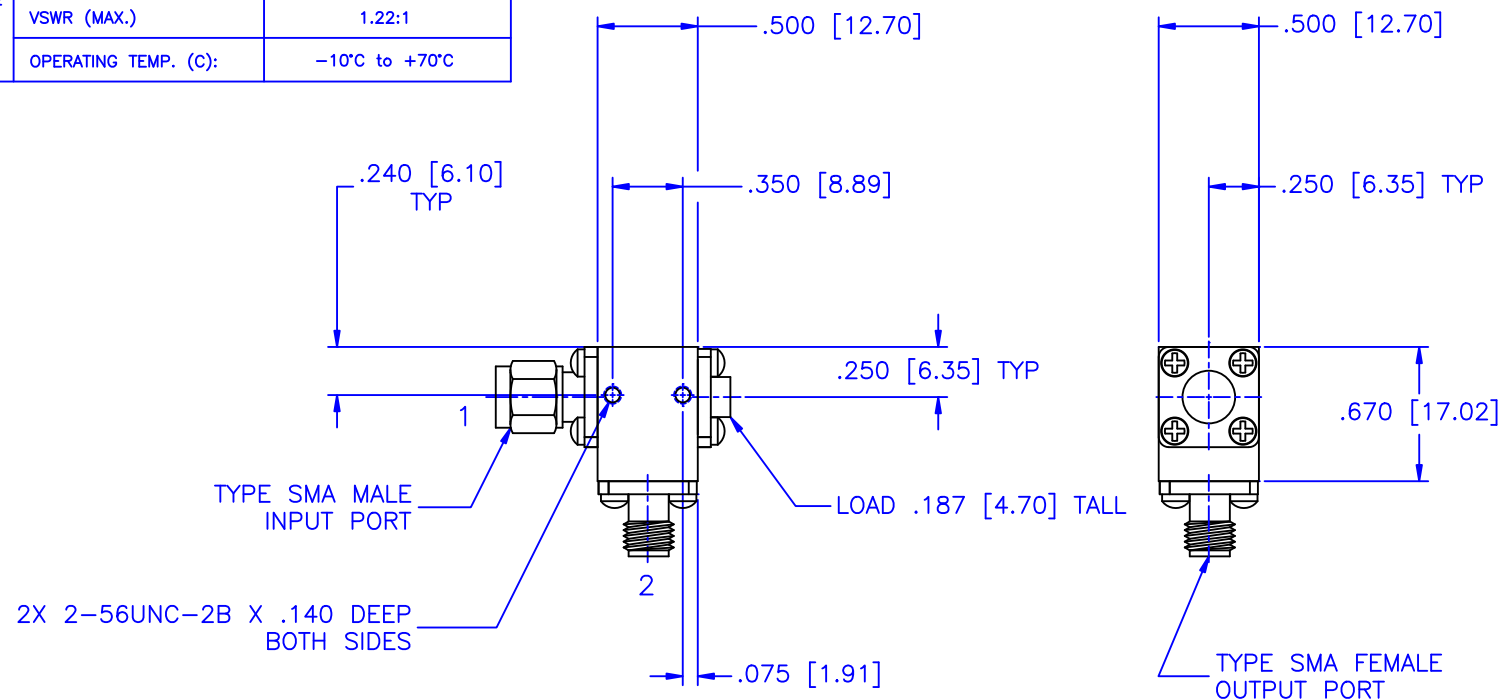

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

ELECTRICAL SPECIFICATION		
FREQUENCY RANGE: 10.70 to 11.70 GHz	INSERTION LOSS (dB MAX.)	0.30
	ISOLATION (dB MIN.)	20
	VSWR (MAX.)	1.22:1
	OPERATING TEMP. (C):	-10°C to +70°C



		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±0.02 ±0.010 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR	
		DRAWN: Paiboon Luekhamhan DATE: 06-30-2008		PART NO. IS-1011-01	
APPROVED: T. Nguyen DATE: 06-30-2008		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	
		THIRD ANGLE PROJECTION 		SIZE: A DO NOT SCALE THE DRAWING	
				REV: A DWG NO. 83845	

