

DESCRIPTION

This class A LDMOS module is designed for both military and commercial applications. It is capable of supporting any signal type and modulation format, including but not limited to 3-4G telecom, WLAN, OFDM, DVB, and CW/AM/FM. The latest device technologies and design methods are employed to offer high power density, efficiency, and linearity in a small, lightweight package.



FEATURES

Optional Heatsink

Manual or Automatic Tx/Rx Switching Available

Specifications subject to change without notice. Typical performance at +28VDC at 25°C in a 50Ω system

Tx SPECIFICATIONS				
PARAMETER	MIN	TYP	MAX	UNIT
Operating Frequency	2200		2500	MHz
PSat Power Output	+41.0	+43.0		dBm
Gain	24.0	26.0		dB
Gain Flatness		1.0	1.5	dB
Input Return Loss	-10	-12		dB
Operating Voltage	+27	+28	+30	VDC
Current Draw		900.0	2400.0	mA
Tx / Rx Switching Time		1.0	2.0	μS

Rx SPECIFICATIONS				
PARAMETER	MIN	TYP	MAX	UNIT
P1dB Power Output		.0		dBm
Gain		11.0		dB
Gain Flatness		0.5		dB
Noise Figure			2.5	
OIP3		+15.0		dBm
Input Return Loss		-10		dB
Current Draw		50.0		mA


MECHANICAL		
PARAMETER	VALUE	UNIT
Dimensions (L x W x H)	3.33 x 2.69 x 0.65	in
RF Connectors (Input / Output)	SMA-F / SMA-F	--
DC / Control Connector	3 Pin locking	--
Cooling	Baseplate Conduction - Optional Heatsink Available	--
Mounting		--
Weight	5	oz
Weight With Heatsink	15	oz


ENVIRONMENTAL / PROTECTIONS			
PARAMETER	MIN	MAX	UNIT
Operating Temp. (Housing Temp.)	-40	+85	°C
Storage Temp Range	-60	+100	°C
Humidity Range	0-100		%
Altitude	0-30,000		ft.
Shock / Vibration	MIL-STD-810 and equivalents		--
Max RF Input	+20		dBm
Load VSWR @ P1dB	Open / Short Output Protection		--
PA Baseplate Shutoff Temperature	+90		°C


DC / CONTROL PINS		
PIN LABEL	NAME	DESCRIPTION
1	GND	Ground
2	GND	Ground
3	+VDC	Supply Voltage - Range Specified in Datasheet
4	+VDC	Supply Voltage - Range Specified in Datasheet
5	Amp Enable	TTL On/Off Low=Enable, High=Disable
6	GND	Ground
7	+VDC	Supply Voltage - Range Specified in Datasheet
9	+VDC	Supply Voltage - Range Specified in Datasheet
9	GND	Ground

DATA RATE VS. OUTPUT POWER	
OFDM MODULATION	POUT (W)
64QAM OFDM	4.0
16QAM OFDM	4.0
QPSK	4.0
BPSK	20.0



See our [application note](#) that describes how this data was taken and how you can apply it to your system

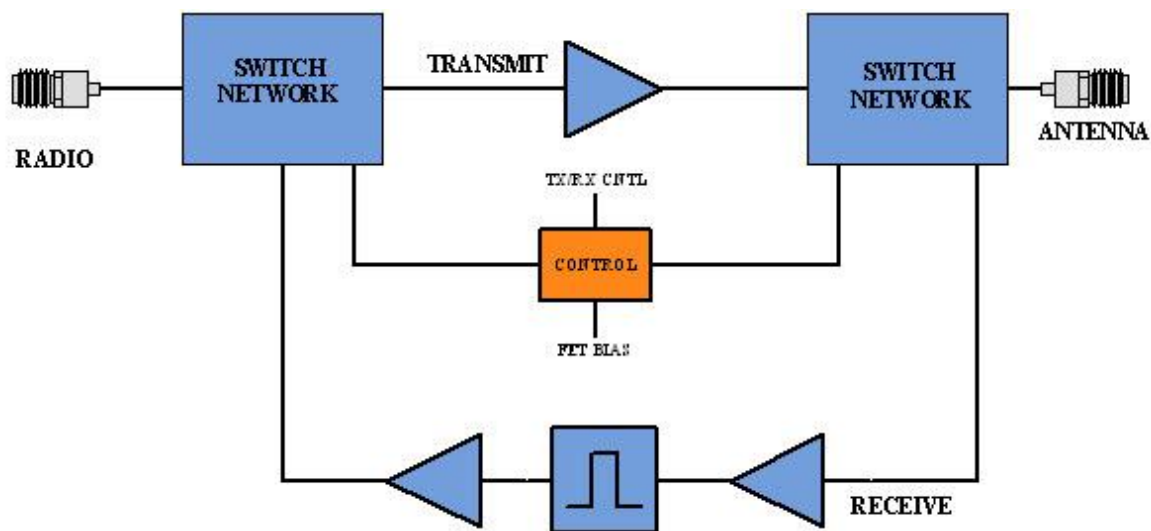

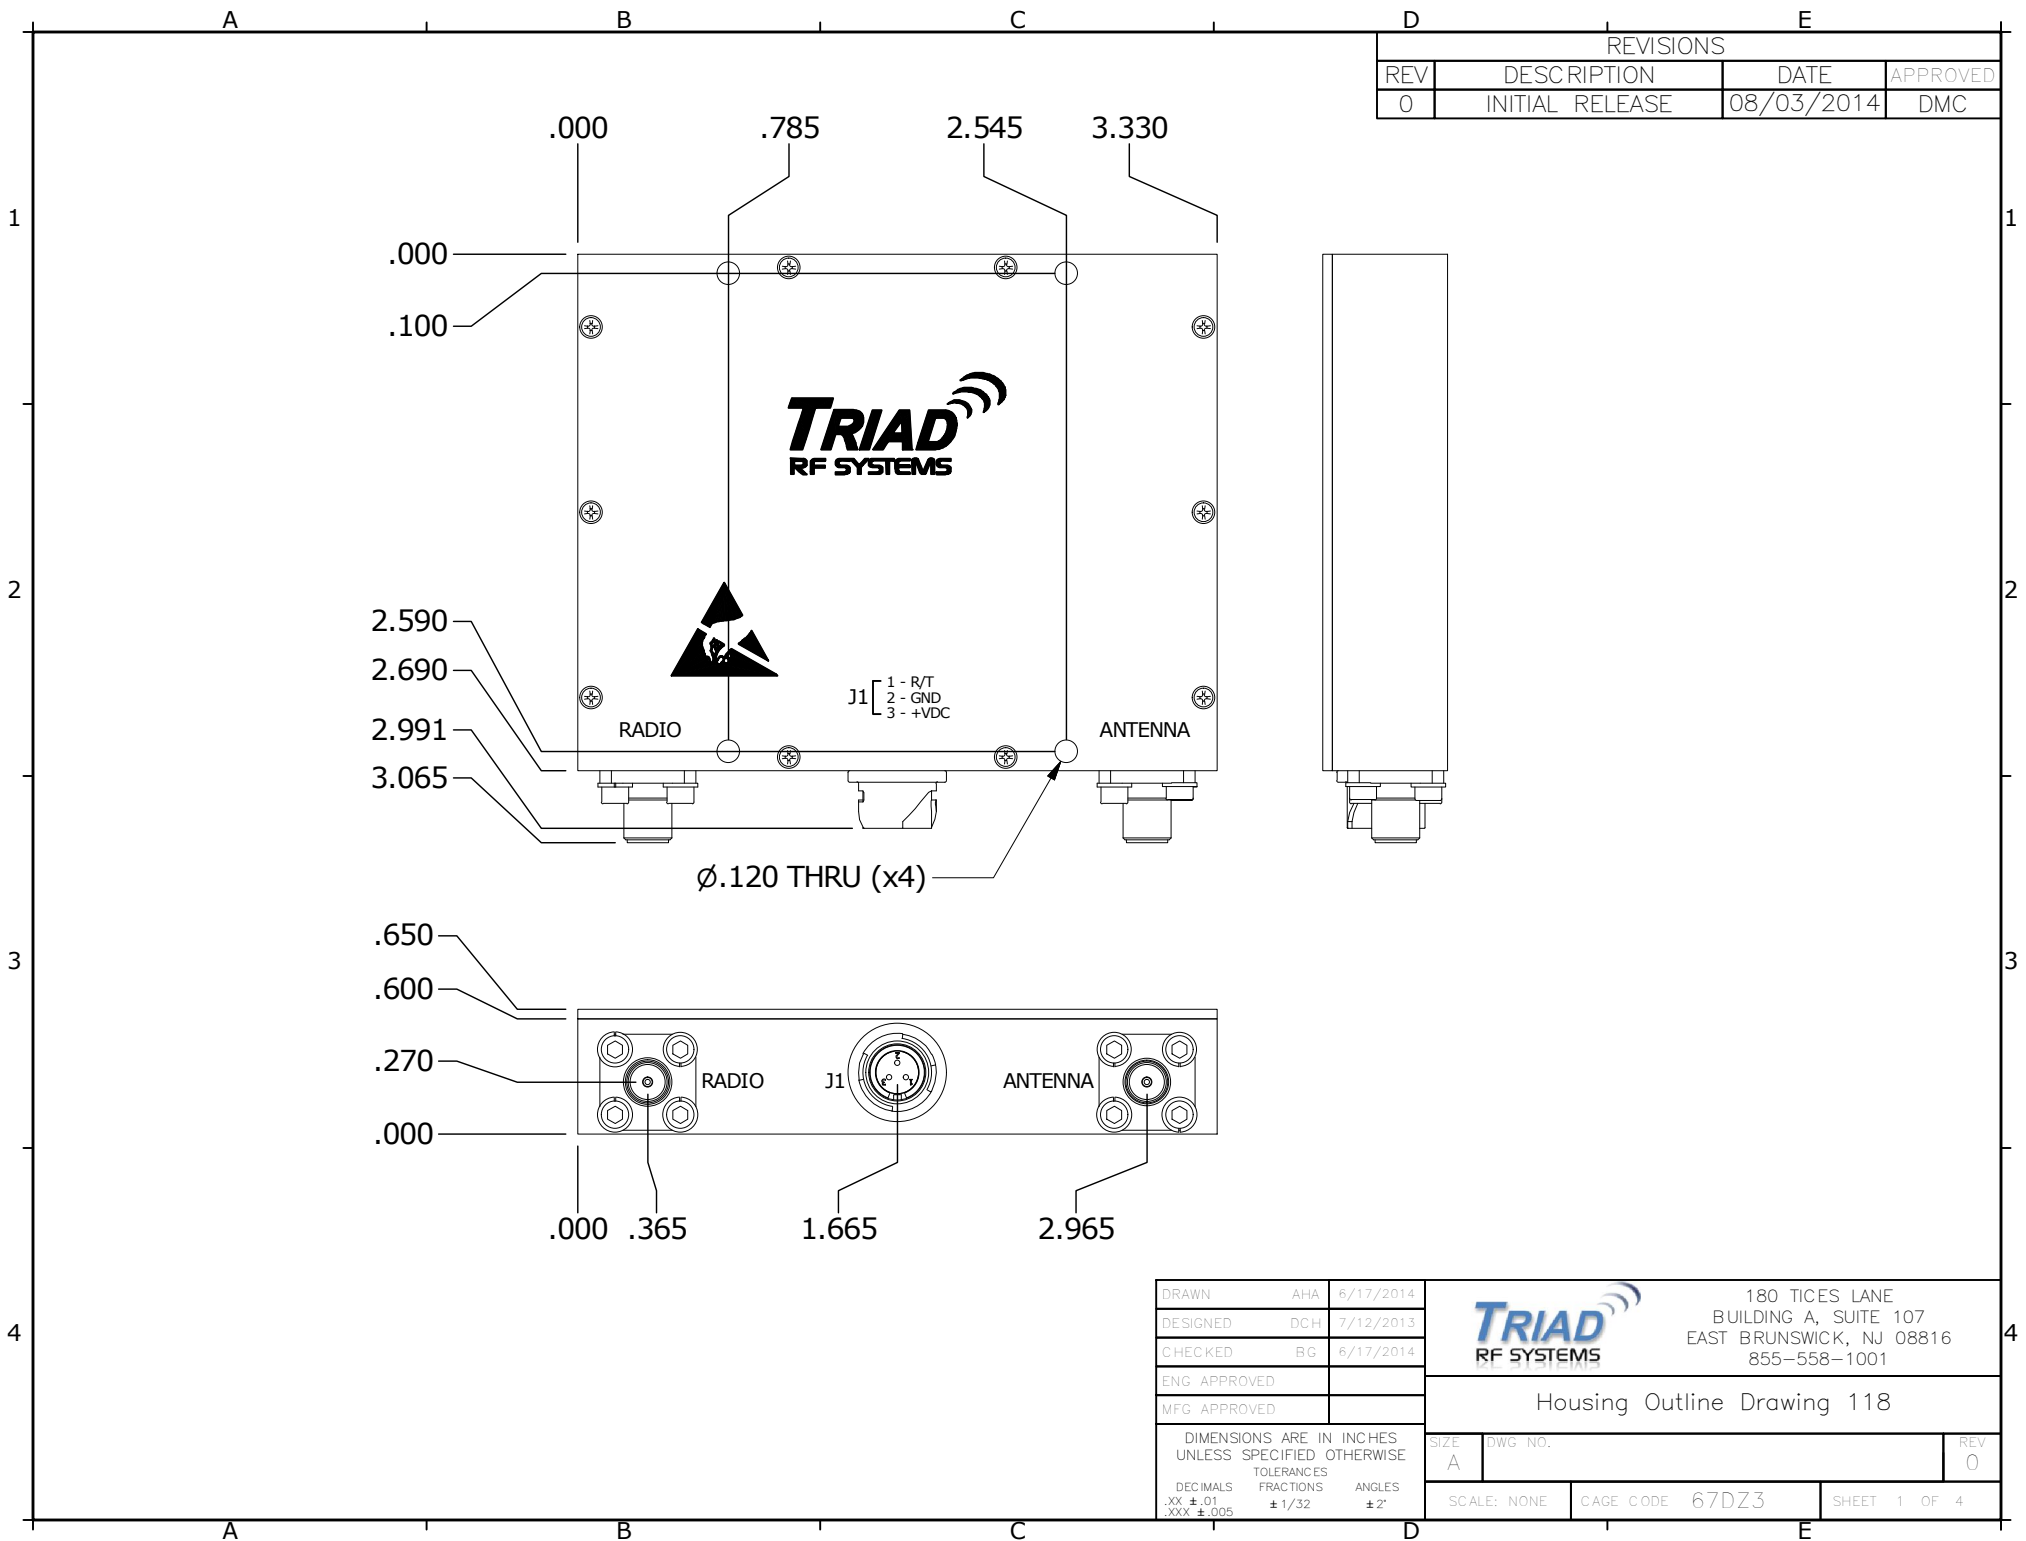

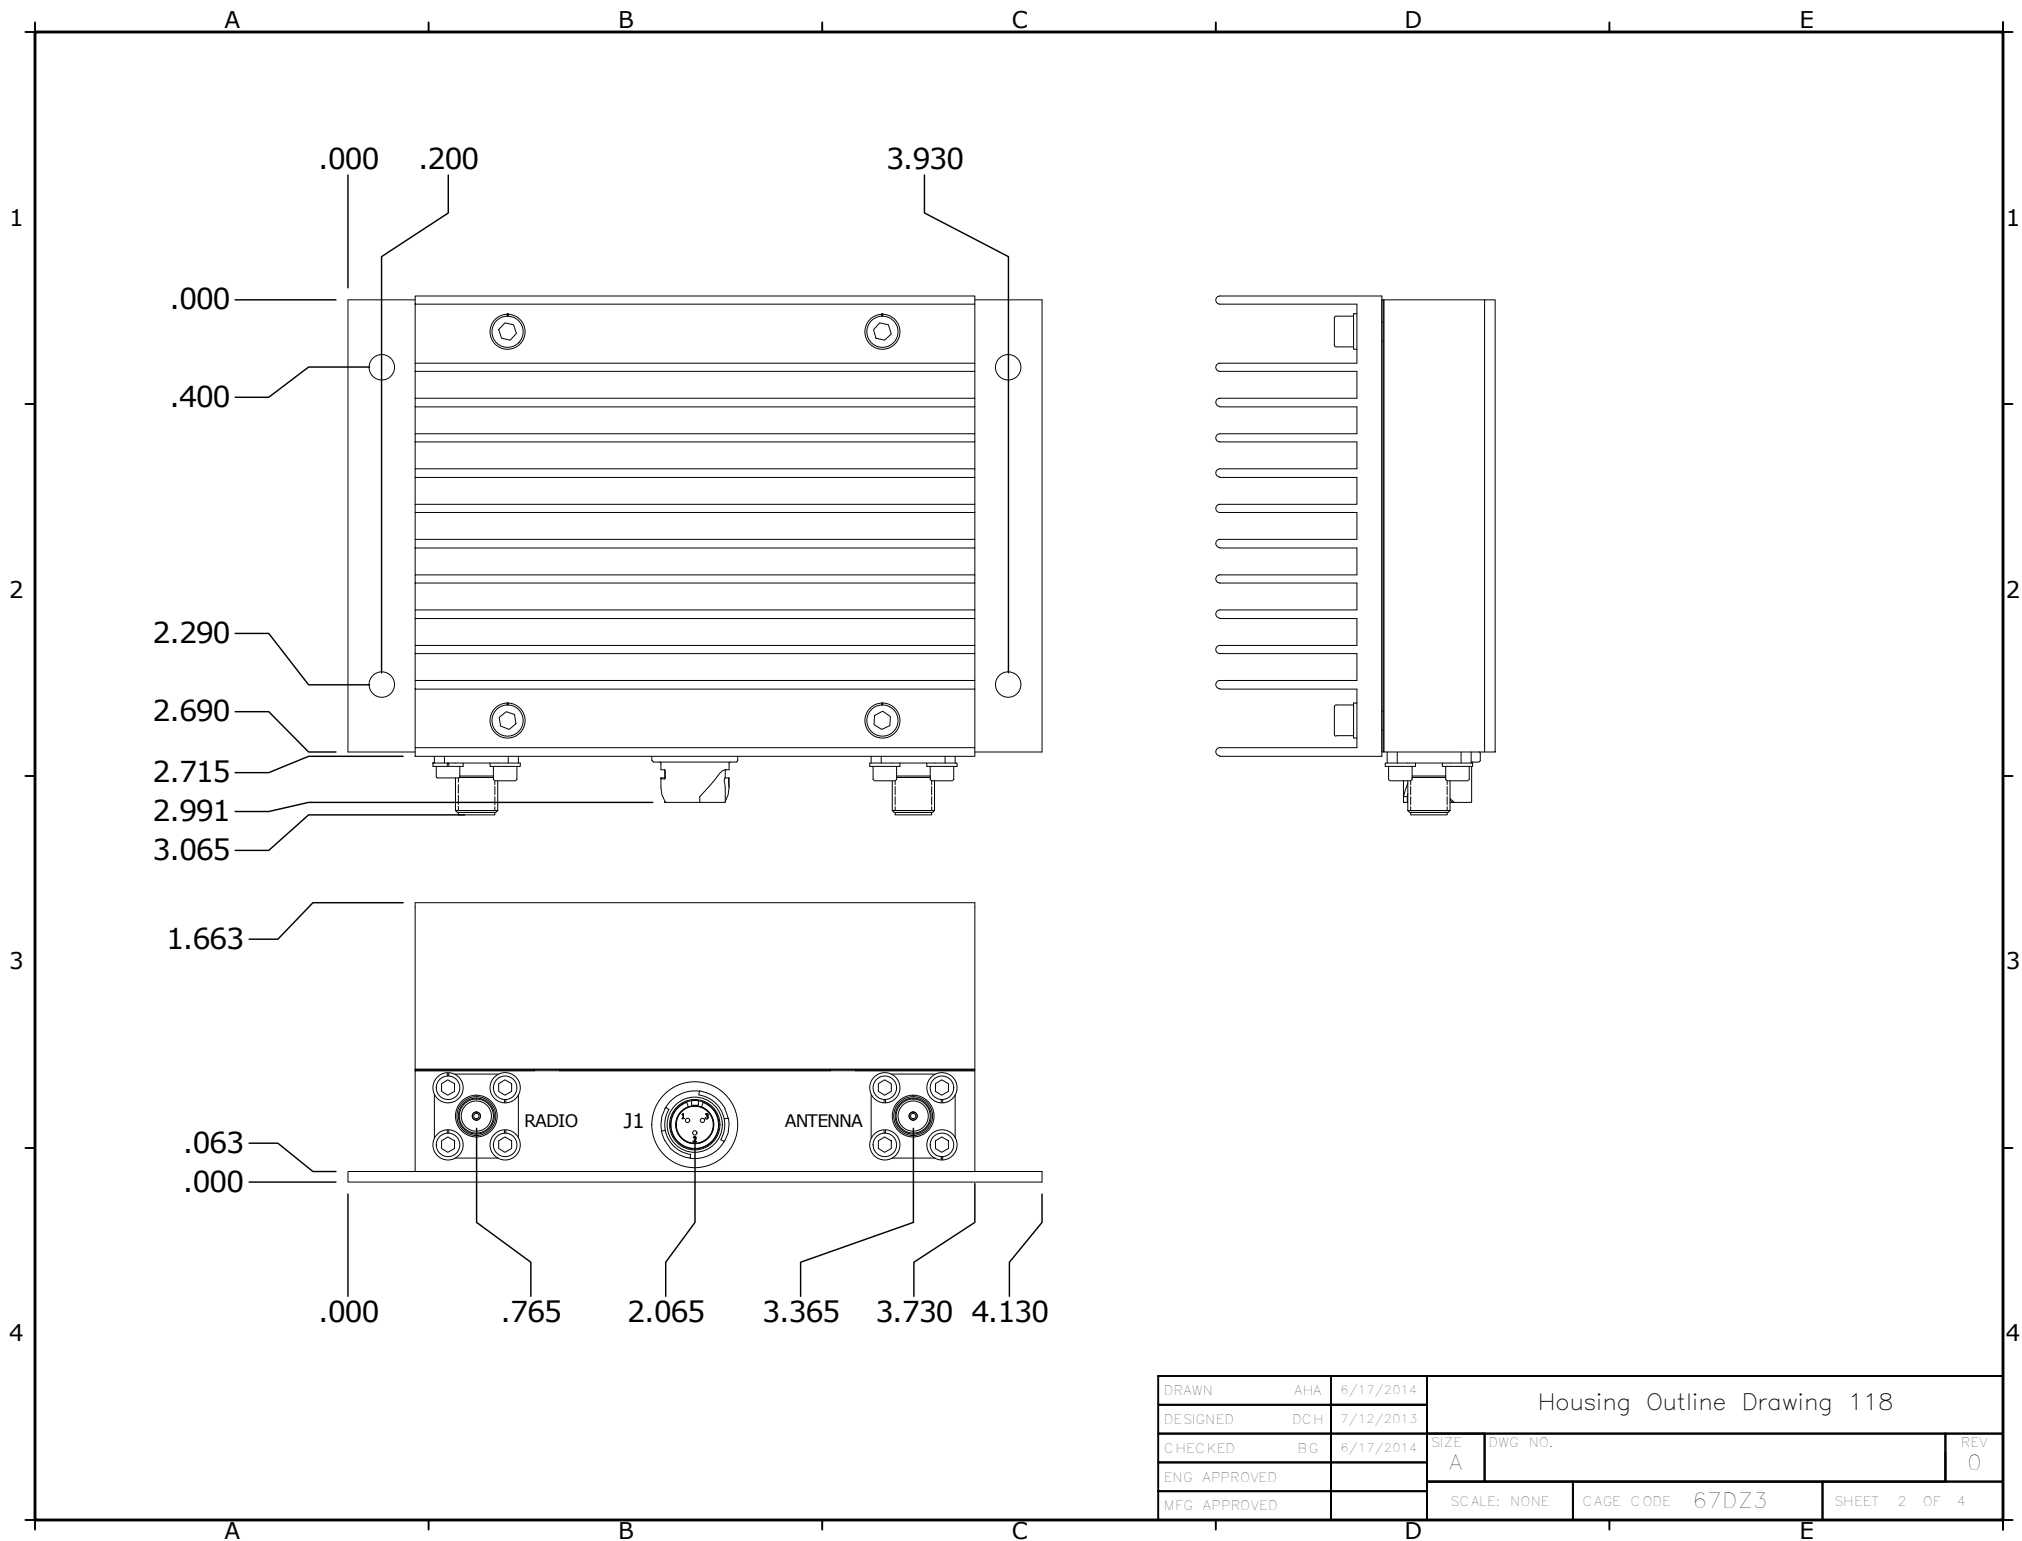

DRAWN	AHA	6/17/2014	Housing Outline Drawing 118		
DESIGNED	DCH	7/12/2013			
CHECKED	BG	6/17/2014	SIZE A	DWG NO.	REV 0
ENG. APPROVED			SCALE: NONE		CAGE CODE 67DZ3
MFG. APPROVED			SHEET 2 OF 4		

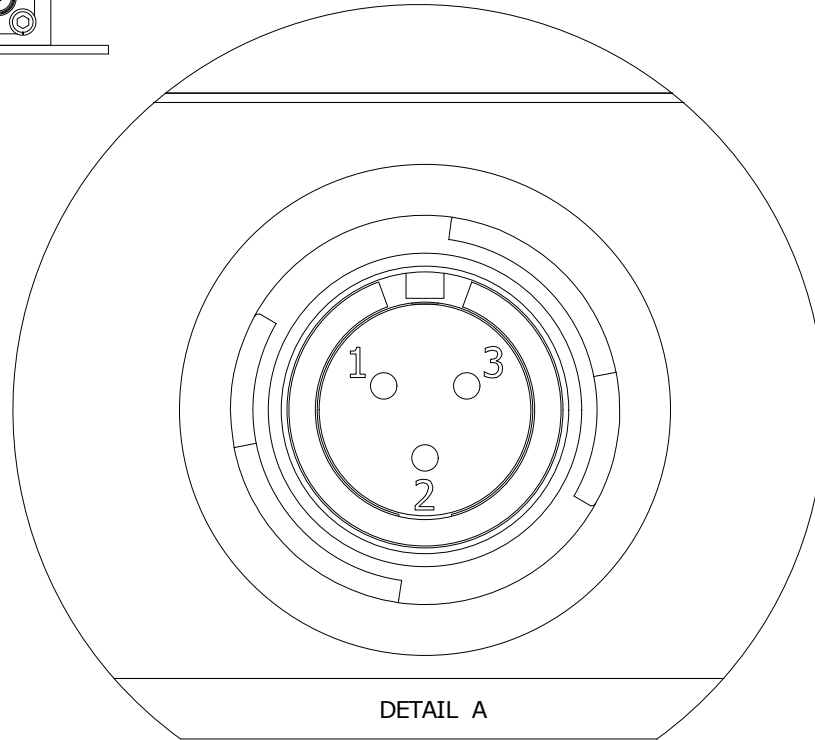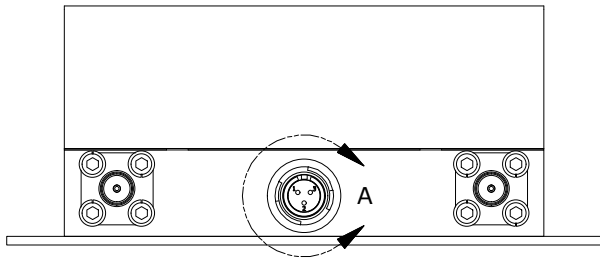

PINOUT TABLE		
PIN	LABE	FUNCTION
1	R/T	RX/TX
2	GND	GROUND WIRE
3	+DC	SUPPLY VOLTAGE

NOTES:

1. VIEW FACING CONNECTOR INTERFACE (AMP SIDE)
2. P/N OF CONNECTOR ON AMPLIFIER: HIROSE LF07WBP-3P

DRAWN	AHA	6/17/2014	Housing Outline Drawing 118		
DESIGNED	DCH	7/12/2013			
CHECKED	BG	6/17/2014	SIZE	DWG NO.	REV
ENG. APPROVED			A		0
MFG. APPROVED			SCALE: NONE	CAGE CODE 67DZ3	SHEET 3 OF 4

A

B

C

D

E

1

1

2


2

3



3

4


4

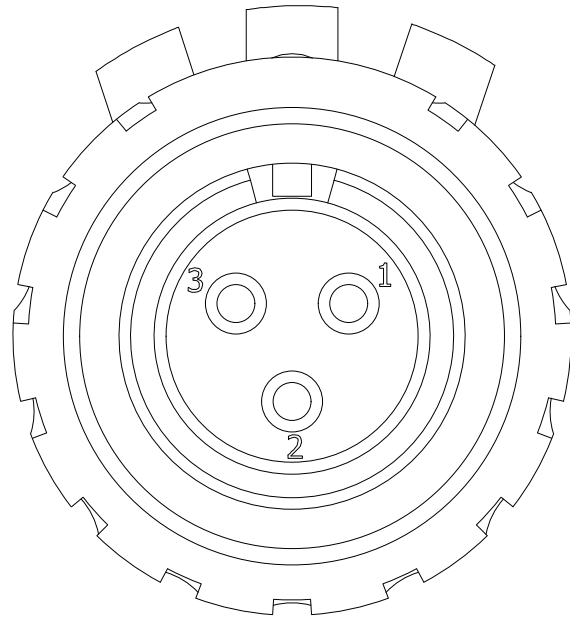


DETAIL B

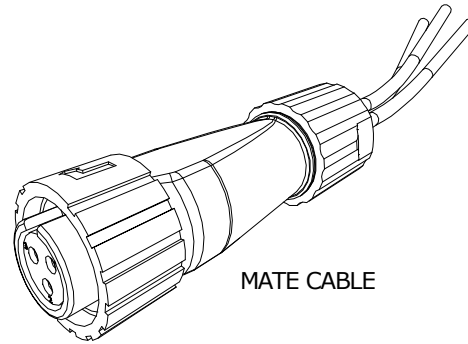

MATE CABLE

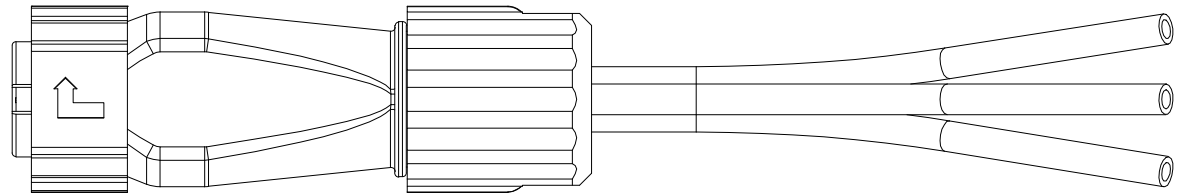

C138302

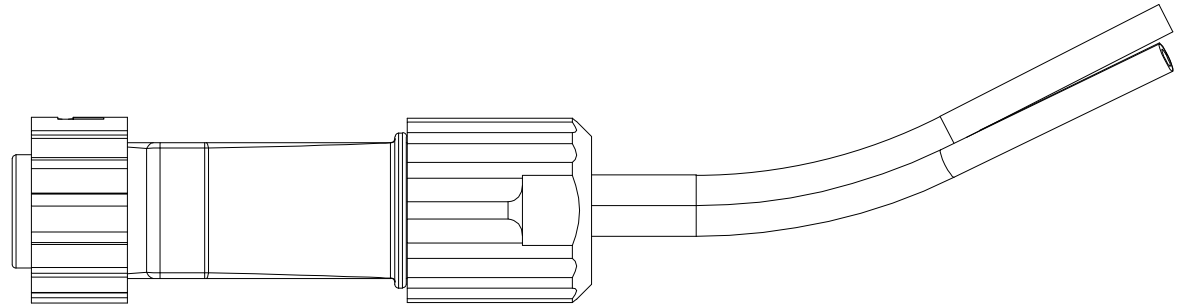

NOTES:

1. P/N OF MATING CONNECTOR REQUIRED: Hirose LF07WBP-3S OR EQUIVALENT
2. TRIAD CABLE P/N: C13080302
3. WIRE DIAMETER: 24 AWG

DRAWN	AHA	6/17/2014	Housing Outline Drawing 118				
DESIGNED	---	8/30/2013					
CHECKED	BG	6/17/2014	SIZE	DWG NO.			REV
ENG. APPROVED			A				0
MFG. APPROVED			SCALE: NONE		CAGE CODE	67DZ3	SHEET 4 OF 4