


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

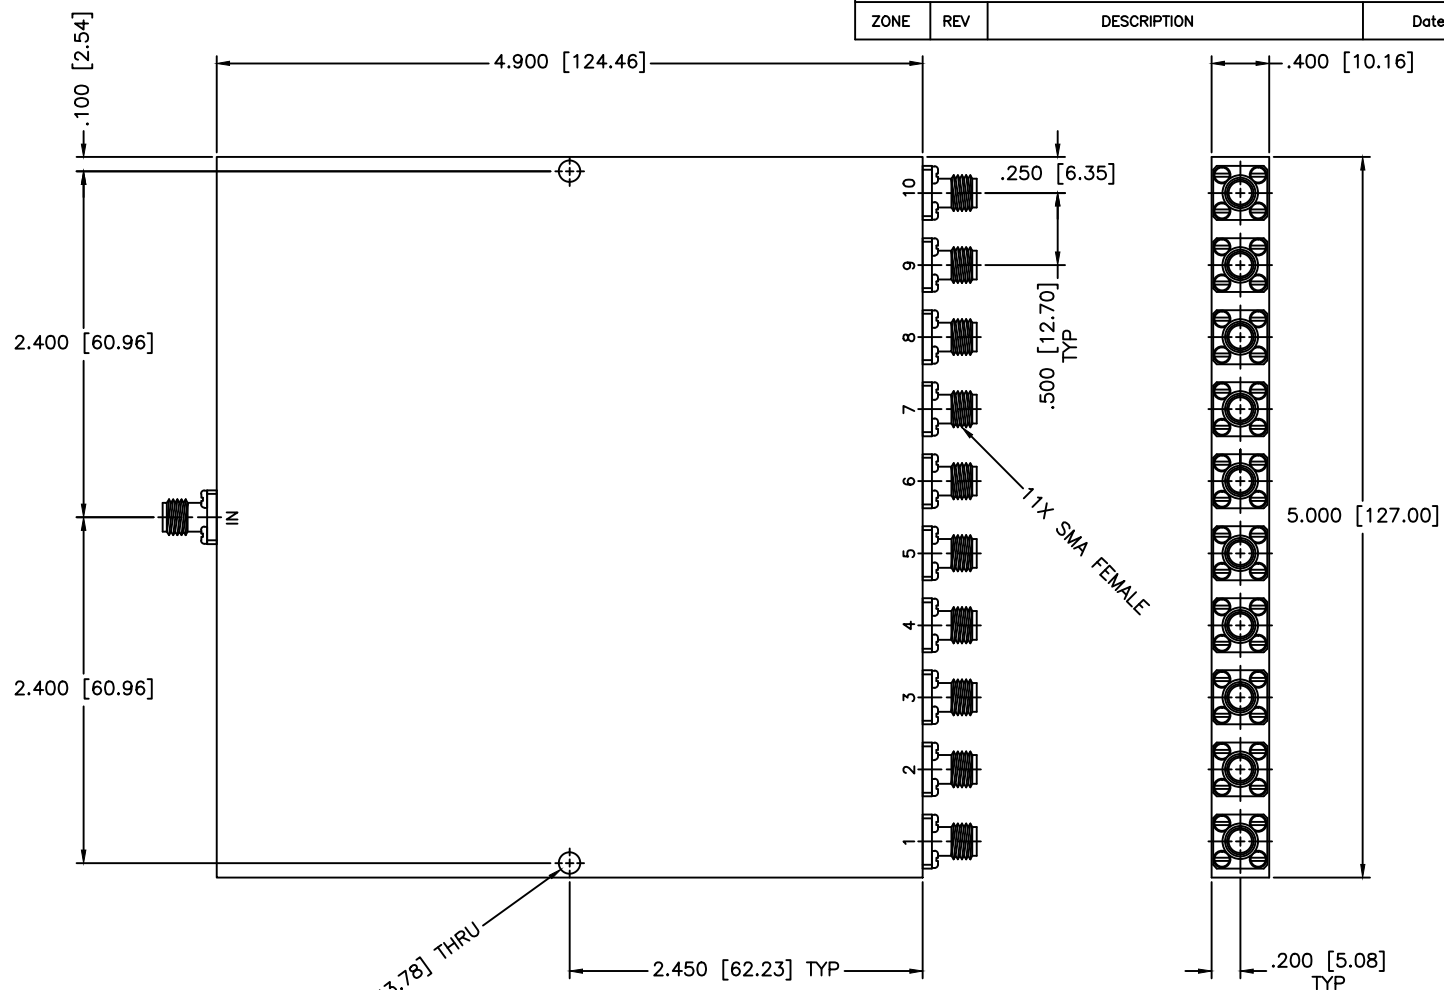

SPECIFICATIONS

Frequency Range: 10–14 GHz
 Insertion Loss: 3.8dB Max.
 Isolation: 10dB Min.
 VSWR Input/Output: 2.00:1/1.90:1 Max.
 Amplitude Balance: ± 1.9 dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE: N/A
 SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR (mm) (MILLIMETERS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: $\pm 0.01 \pm 0.005$
 ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:

10-WAY POWER DIVIDER

PART NO.

PS10-18

DRAWN:

Paiboon Luekhamhan

DATE:

03-14-2012


APPROVED:

T. Nguyen

DATE:

03-14-2012

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)



CAGE CODE:

OD2L5

SIZE:

N/A

REV:

N/A

DWG NO.

86026

DO NOT SCALE THE DRAWING