

DC BLOCKS SMA

**7 KHz - 23 GHz
INNER ONLY**



MODELS: 8535

SPECIFICATIONS:


Electrical:

Frequency Range _____ 7 KHz - 23 GHz
VSWR (100 KHz - 23 GHz) _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Insertion Loss
100 KHz - 12.4 GHz _____ 0.5 dB Max.
12.4 - 23 GHz _____ 0.75 dB Max.
Voltage Rating _____ 100 Volts
Operating Temp. Range _____ -65°C to +125°C
< -3 dB Bandwidth _____ 7 KHz - 23 GHz

Mechanical:

SMA Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper

Model Number: **8535**

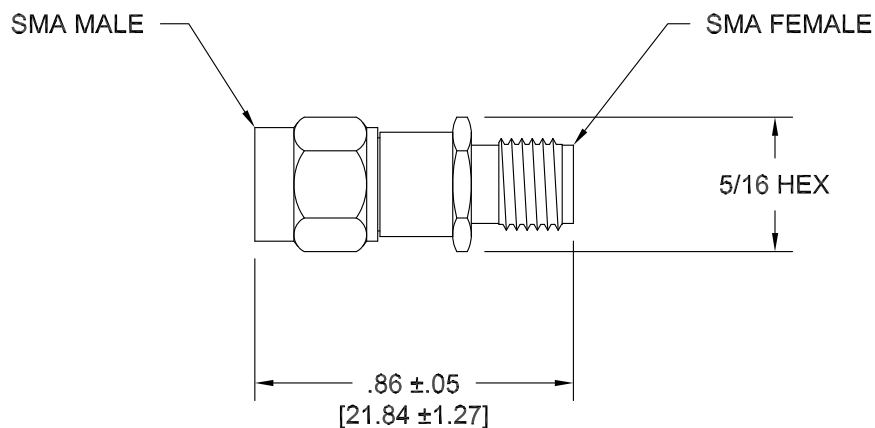

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.