


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

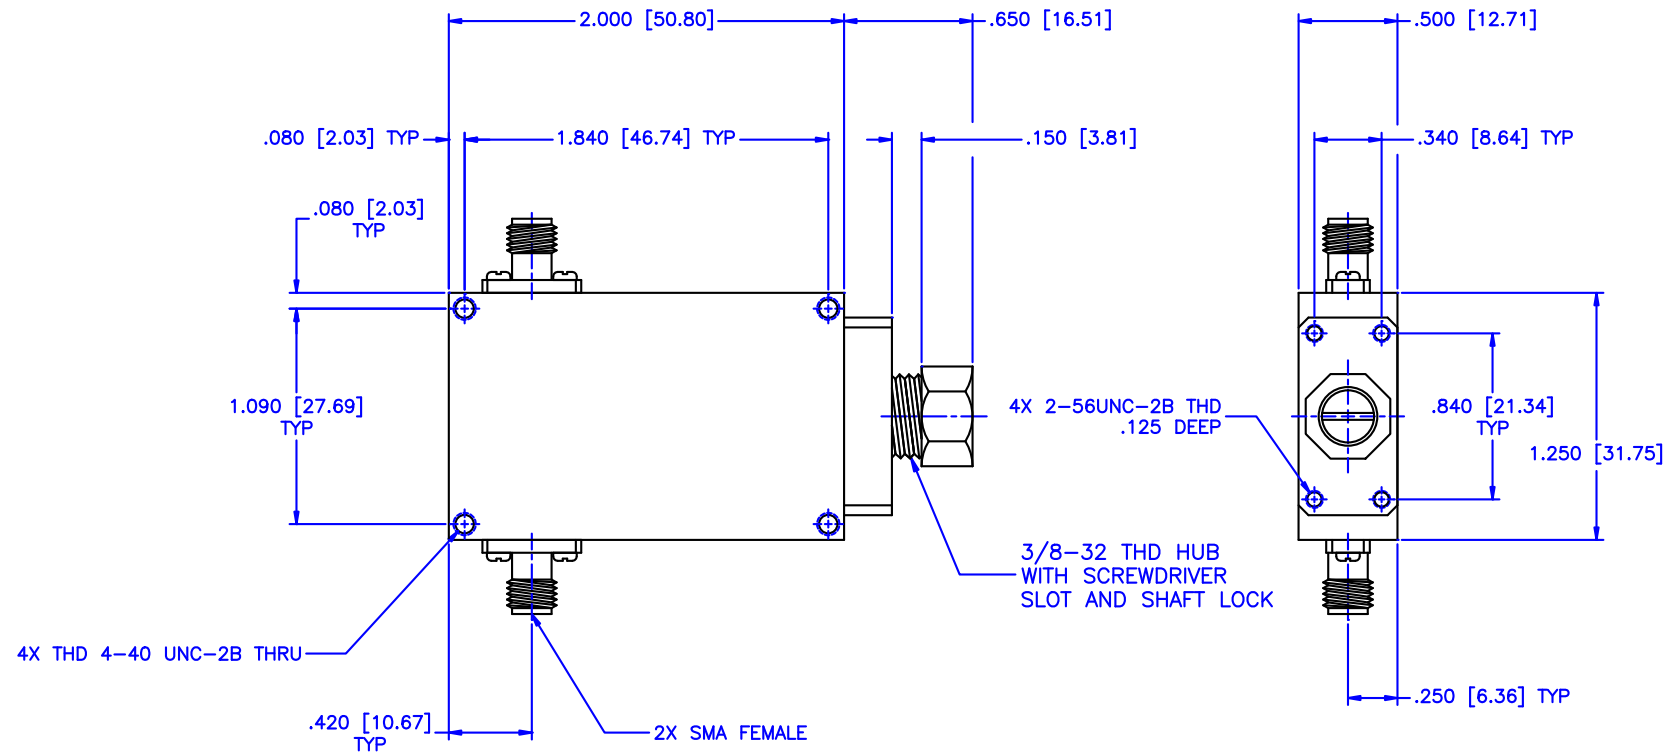

Specifications:

Frequency Range: 4–12.4 GHz

Attenuation: 20dB

Insertion Loss: 0.5 Max.

VSWR: 1.50:1

RF Power: 7W Average, 3kW Peak

Environmental:

Temperature range: –55°C to +110°C

Shock: 15 G's, 11mS, 1/2 sine

Vibration: 3 G's overall

Altitude: 40,000 ft. Survival 25,000ft Operating

MATERIAL: 				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:		SHEET:	N/A
DRAWN:		DATE:		CONTINUOUSLY VARIABLE ATTENUATOR			
APPROVED:		DATE:		PART NO.			
T. Nguyen		02-08-2011		CVA20-20			
02-08-2011		THIRD ANGLE PROJECTION		CAGE CODE:		SIZE:	REV:
02-08-2011				0D2L5		A	N/A
				DO NOT SCALE THE DRAWING		DWG NO.	
						85415	