

D4

SERIES BNC RF.COAXIAL CONNECTORS





The D4 series are miniature coaxial connectors similar to c4 series, with high electrical and mechanical stability and low space requirements, ideal for high density connectors applications, are specially used in the PCB backplane connection of mixtures of high and low frequency for communication equipments.

D4

SERIES BNC RF COAXIAL CONNECTORS

KEY PERFORMANCE			
Temperature range		-55C~+125C	Insulation resistance
Characteristic Impedance		50Ω	Dielectric Withstanding Voltage
Frequency range		0~2GHz	VSWR
Contact resistance	Center conductor	≤10m	Durability
	Outer conductor	≤5m	

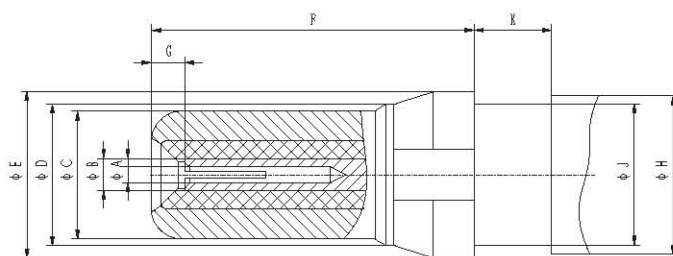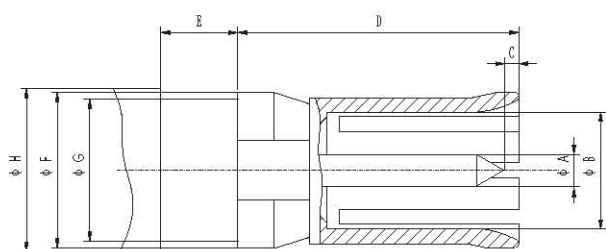


Symol	JACK (mm)	
	MIN	MAX
A	0.99	1.01
B		
C	0.10	0.50
D	9.35	9.50
E	2.22	2.40
F		5.25
G	4.76	4.79
H		6.00

Symol	PLUG (mm)	
	MIN	MAX
A		
B		
C		3.85
D		4.75
E		5.25
F	8.85	9.00
G	0.90	1.10
H		6.00
J	4.76	4.79
K	2.22	2.40




D4 J3

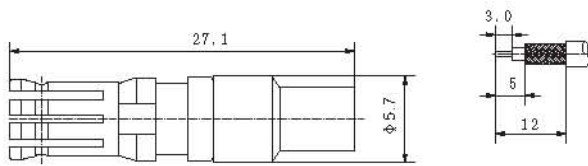


Cable type:SFF 50 1.5 1

D4 K3

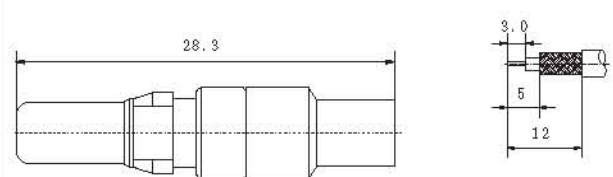


Cable type:SFF 50 1.5 1

D4 J316

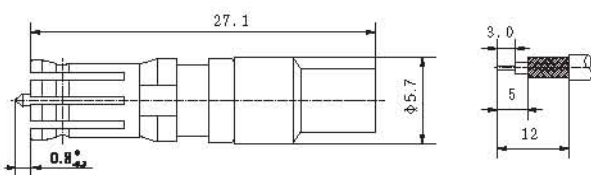


Cable type:RGD316

D4 K316

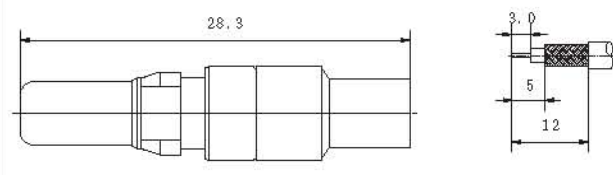


Cable type:RGD316

D4 JB3 1

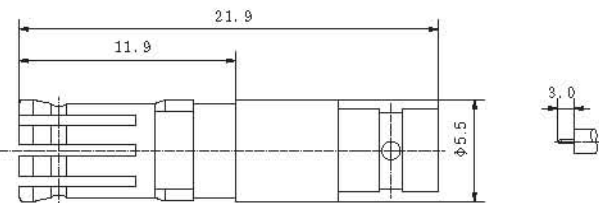


Cable type:SFT 50 3 1

D4 K223

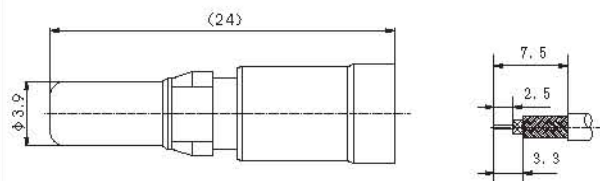

Cable type:RG223/U


D4 JHD

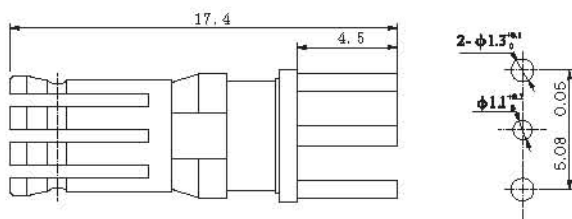

D4 KHD



SMA/D4 KK

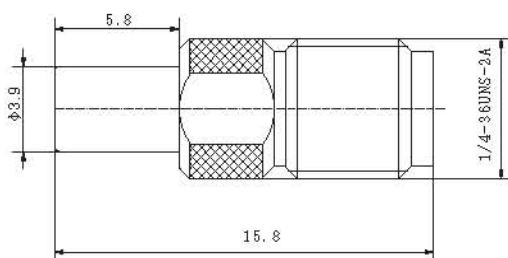

SMA/D4 KJ

