

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

D

D

C


C

B

B

A

A

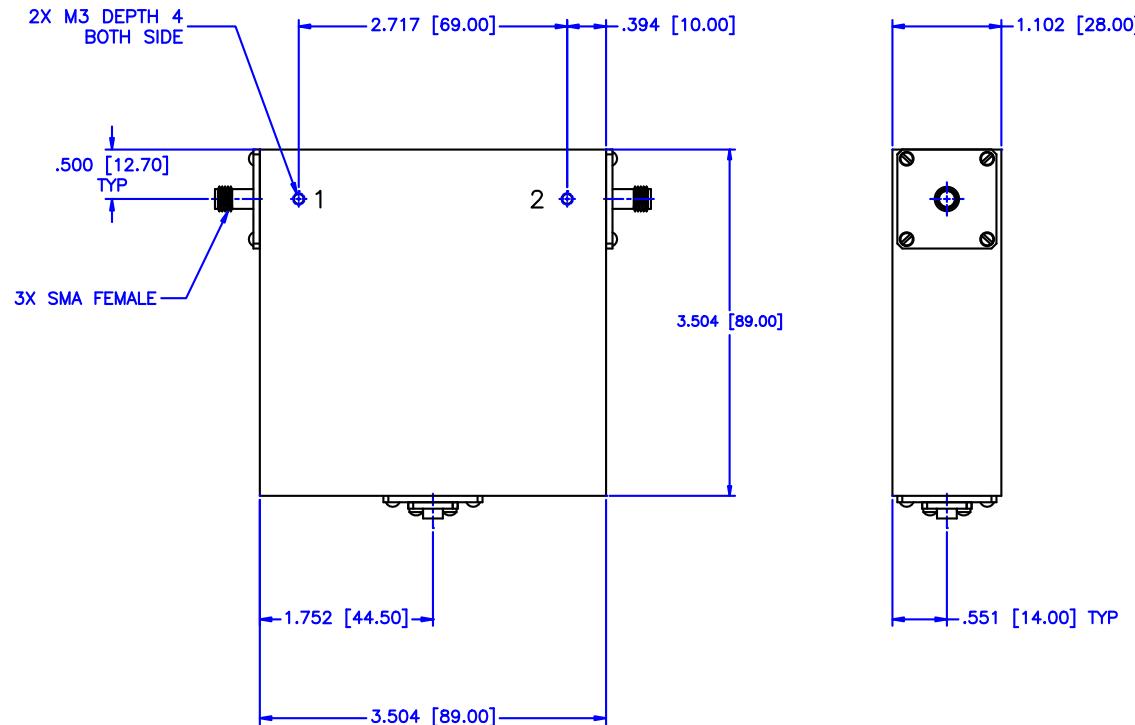

SPECIFICATIONS:

Frequency Range: 0.8–2.5 GHz
 Isolation: 12dB Min.
 Insertion loss: 1.00dB Max.
 VSWR: 1.70:1 Max.
 Operating Temperature: +10°C to +40°C

MATERIAL:		DRAWING TITLE: COAXIAL ISOLATOR	
DRAWN: Poiboon Luekhamhan		SCALE: N/A	
APPROVED: T. Nguyen		SHEET: N/A	
DATE: 11-22-2013		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01$ $\pm .005$ ANGLE: $\pm 1/2^\circ$	
DATE: 11-22-2013		DRAWING NO.: IS-69	
CAGE CODE: OD2L5		SIZE: C	REV: N/A
		DO NOT SCALE THE DRAWING	

MCL MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCL.COM>

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR REVEALED WITHOUT WRITTEN
 APPROVAL OF MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCL)

THIRD ANGLE PROJECTION