

DESCRIPTION

PMI MODEL QC-5D3G6G IS QUADRATURE COUPLER THAT OPERATES BETWEEN THE FREQUENCY RANGE OF 5.3 TO 6.0 GHZ.

SPECIFICATIONS

- FREQUENCY RANGE: 5.3 TO 6.0 GHZ
- ISOLATION: 18dB
- INSERTION LOSS: 0.9dB (+3dB THEORETICAL)
- VSWR: 1.4:1
- IMPEDANCE: 50Ω
- AMPLITUDE BALANCE: ±0.7dB
- PHASE BALANCE: ±5°
- SIZE: (L) 1.25" X (W) 0.75" X (H) 0.37"
- FINISH: PAINTED GRAY


CONNECTOR FUNCTIONS				
INPUT	J1	J2	J3	J4
J1	X	ISOLATION	90°	0°
J2	ISOLATION	X	0°	90°
J3	90°	0°	X	ISOLATION
J4	0°	90°	ISOLATION	X

ENVIRONMENTAL RATINGS

- TEMPERATURE: -55°C TO + 85°C (OPERATING)
-65°C TO +125°C (STORAGE)
 - HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
 - SHOCK: MIL-STD-202F, METHOD 213B COND. B
 - VIBRATION: MIL-STD-202F, METHOD 204D COND. B
 - ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
 - TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A
- NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	A	ORIGINAL RELEASE	06/12/12

MECHANICAL OUTLINE

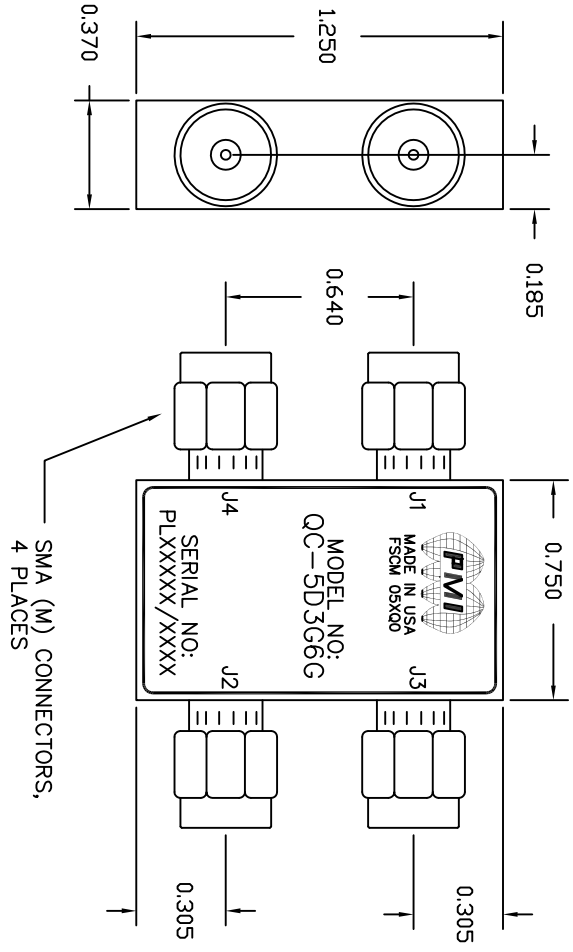

CONFIDENTIAL & PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-lit.com
E-MAIL: sales@pmi-lit.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE	
DRAWN <i>pk</i>		06/12/12	
CHECKED			
ISSUED			
TITLE			
PRODUCT FEATURE			
QC-5D3G6G			
SIZE	FSCM NO.	DWG NO.	REV.
A	05X00	27016961	A
SCALE N: S		SHEET 1 OF 1	