


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

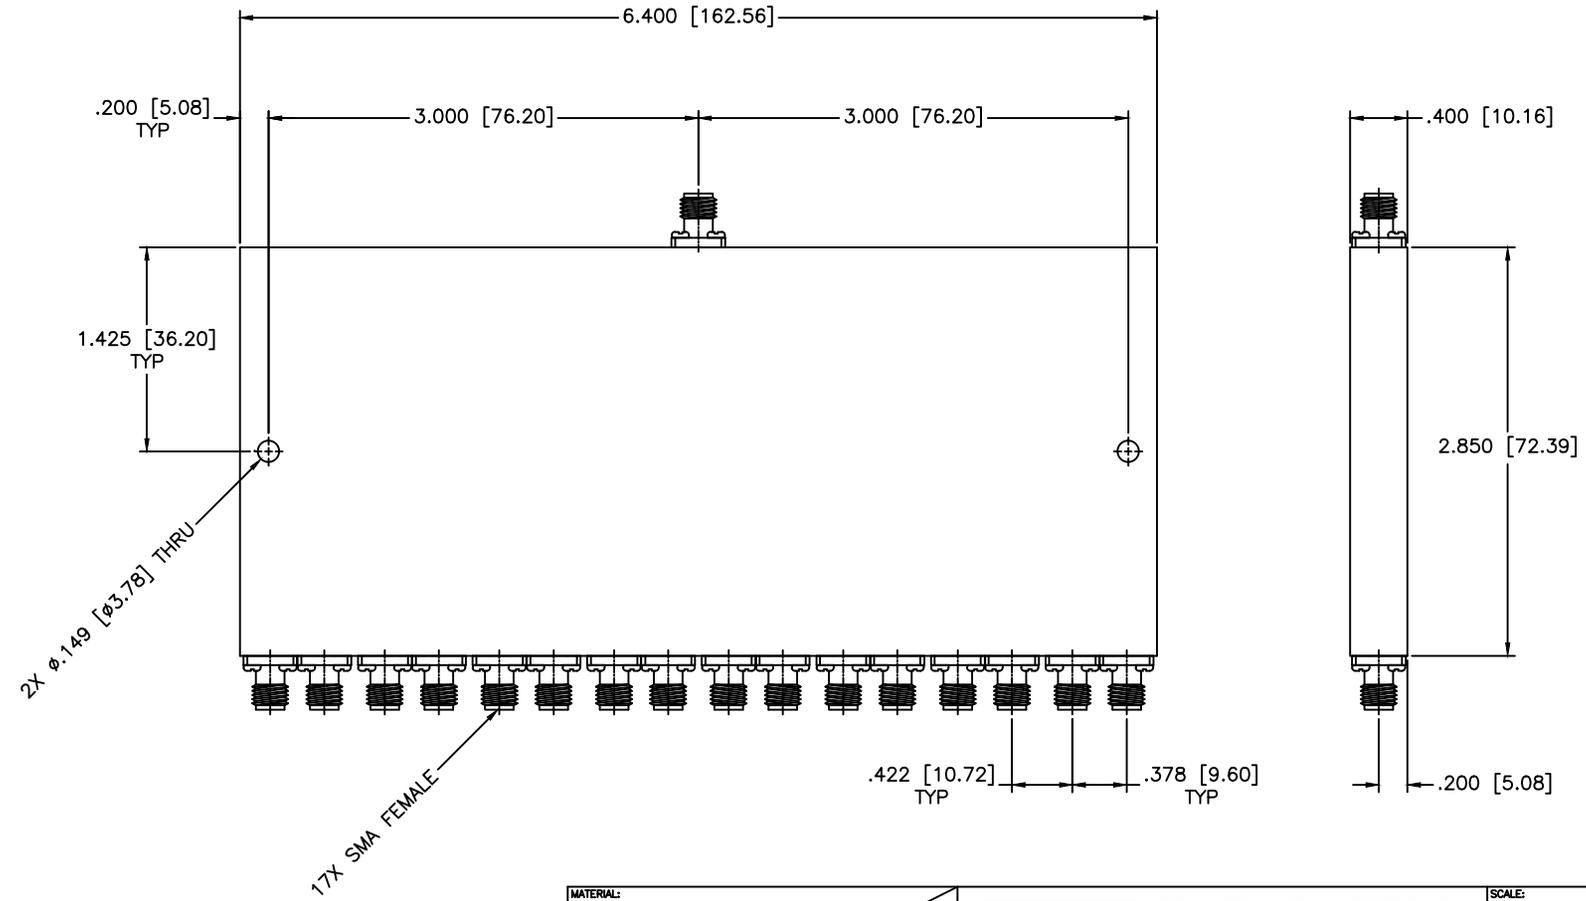

SPECIFICATIONS

Frequency Range: 3.4–4.2 GHz
 VSWR In/Out: 1.65:1 Max.
 Amplitude Balance: ±0.8dB Max.
 Phase Balance: ±5Deg. Max.
 Insertion Loss: 2.9dB Max.
 Isolation: 16dB Min.
 Power: 30W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE: 16-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan DATE: 10-04-1999		PART NO.: PS16-57	
APPROVED: T. Nguyen DATE: 10-04-1999		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 81436
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		<small>DO NOT SCALE THE DRAWING</small>	