


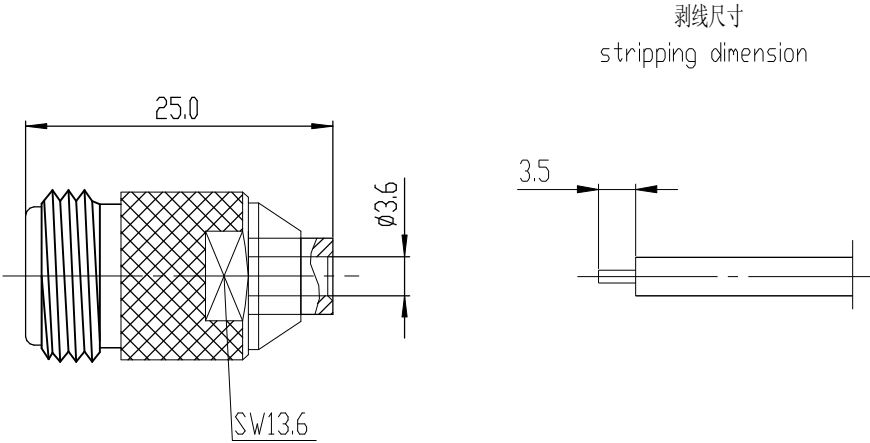

产品型号 type	电缆型号 cable type
N-KB3	SFT-50-3-1、RG402/U

Electrical Characteristics:

- 1.Characteristic Impedance: $50\ \Omega$
 - 2.Frequency range: DC~11Ghz
 - 3.Contact resistance
Center conductor: $\leq 1.0\ m\ \Omega$
Out conductor: $\leq 0.2\ m\ \Omega$
 - 4.Insulation resistance: $\geq 5000M\ \Omega$
 - 5.Insulator withstanding:1500V
 - 6.VSWR: ≤ 1.5
 - 7.Durability: 500cycles
- Application:MIL-C-39012/1E

Material&Finishing

- 1.Center contact :
Female:phosphor bronze,gold plated
- 2.Bodies:brass,nickel plated
- 3.Insulators:PTFE


主要性能指标:

- 1.特性阻抗: $50\ \Omega$
- 2.频率范围: DC~11Ghz
- 3.接触电阻:
中心导体: $\leq 1.0\ m\ \Omega$
外导体: $\leq 0.2\ m\ \Omega$
- 4.绝缘电阻: $\geq 5000M\ \Omega$
- 5.介质耐压:1500V
- 6.电压驻波比: ≤ 1.5
- 7.插拔次数: 500次

执行标准:MIL-C-39012/1E

材料和镀层

- 1.中心接触件:
插孔:锡磷青铜,镀金
- 2.壳体:黄铜,镀镍
- 3.绝缘子:聚四氟乙烯

		SCALE	N-KB3 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1		
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
DRAWN				
CHECKED				
APPROVED				