


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

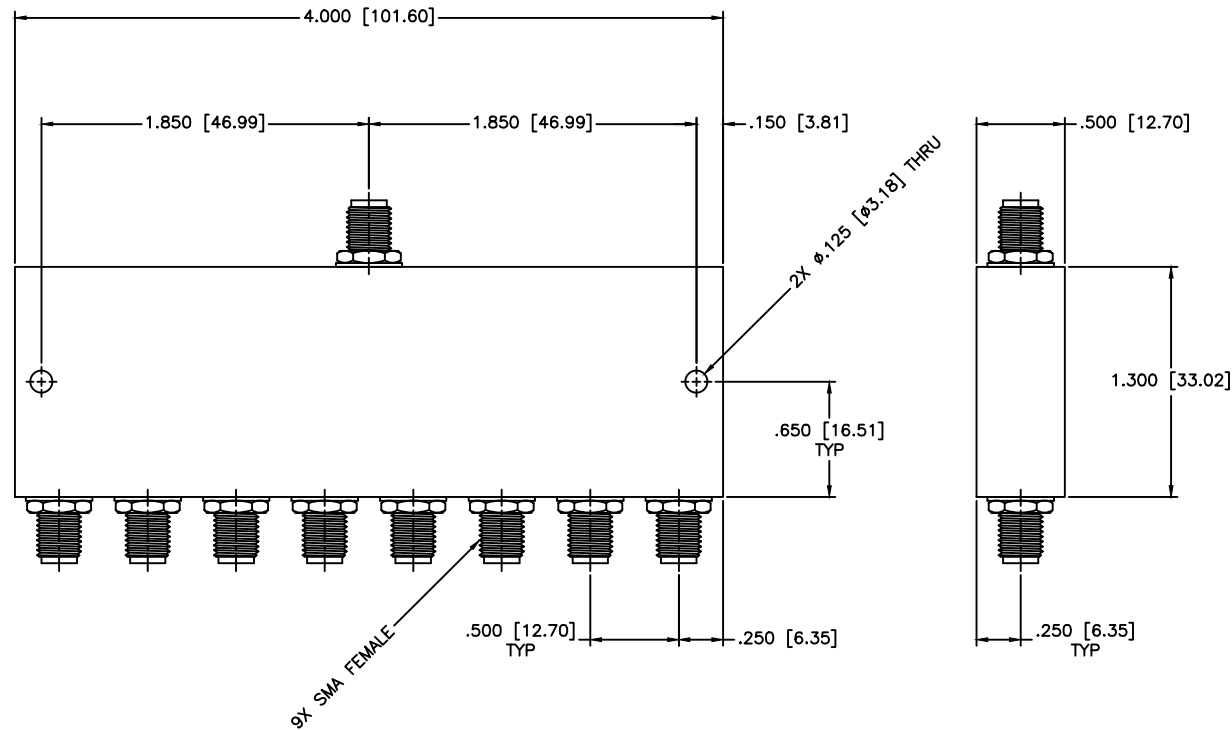

SPECIFICATIONS

FREQUENCY RANGE: 0.5–100 MHz
 INSERTION LOSS: 1.1dB Max.
 ISOLATION: 25dB Min.
 AMPLITUDE BALANCE: ± 0.2 dB Max.
 PHASE BALANCE: ± 2 Deg. Max.
 VSWR: 1.30:1 Max.
 POWER: 1 Watt Max.

MATERIAL: 				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 8-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan	DATE: 12-05-2008	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PL8-11		
APPROVED: T. Nguyen	DATE: 12-05-2008			CAGE CODE: 0D2L5	SIZE: A REV: A DO NOT SCALE THE DRAWING	DWG NO. 81955