

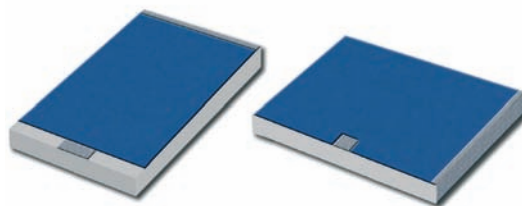


Standards
NF C 96-315
MIL-DTL-39030

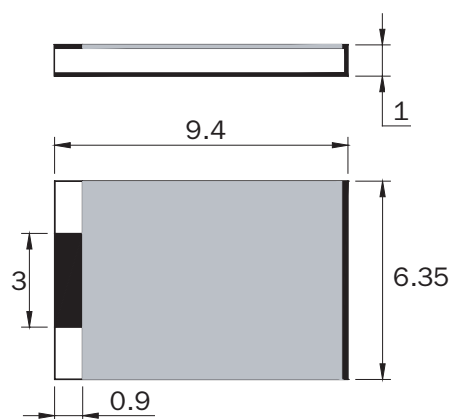


Substrate
Resistive film
Protection film
Contacts

BeO
Thick film
Epoxy
PtAg



40-0286

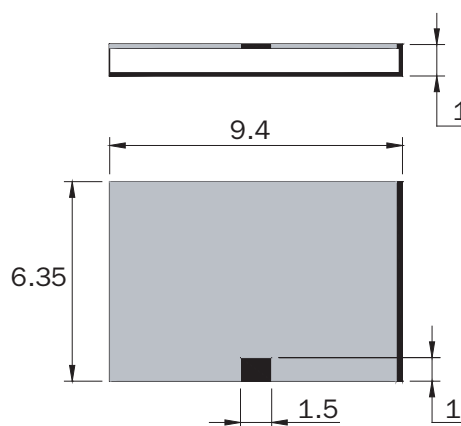

40-0287

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
40-0286	2.5	150	50	1.20
40-0287	2.5	150	50	1.20

mm	inch
0.9	0.035
1	0.039
1.5	0.059
3	0.118
6.35	0.250
9.4	0.370



Available on Tap and Reel Packaging