


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

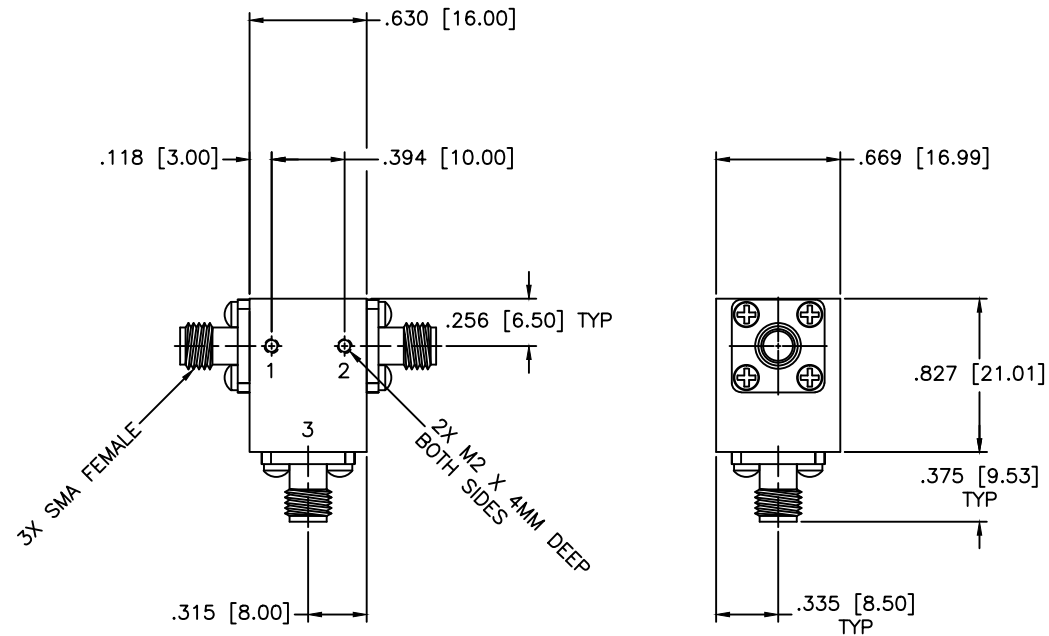

SPECIFICATIONS

Frequency Range: 6–12 GHz
Isolation: 17dB Min.
Insertion Loss: 0.7dB Max.
VSWR: 1.35:1 Max.
Power: 25W Avg, 250W Peak
Operating Temperature: –54°C TO +85°C

		MCLI		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A							
						SHEET: N/A							
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR									
				PART NO. CS-24									
DRAWN: Paiboon Luekhamhan		DATE: 05-17-2010		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE: N/A		REV: N/A		DWG NO.	
APPROVED: T. Nguyen		DATE: 05-17-2010				THIRD ANGLE PROJECTION 		OD2L5		DO NOT SCALE THE DRAWING			