

Surface Mount

Diplexer

TDP-122-75+

**75 Ω DC to 1200 MHz
(DC-120, 160-1200 MHz)**



CASE STYLE: HR1176

The Big Deal

- Low insertion loss
- High rejection
- 75 Ω Impedance
- Miniature shielded package

Product Overview

TDP-122-75+ is a low-pass + high-pass combination device. Low pass port is designed for DC to 120 MHz and high pass port is designed for 160 to 1200 MHz. This diplexer can be used in satellite systems, communication test sets and other multiband radio systems.

Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application
Excellent stopband rejection	Spurious rejection and avoids using additional filters
Miniature shielded package	Reduced interference with the surrounding components.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Surface Mount Diplexer

TDP-122-75+

75Ω DC to 1200 MHz (DC-120, 160-1200 MHz)

Maximum Ratings

Operating Temperature -40° to 85°C

Storage Temperature -55°C to 100°C


RF Power Input 250mW at 25°C

Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation

Pin Connections

HIGH PASS PORT	7
LOW PASS PORT	9
COMMON PORT	18
GROUND	1-6,8,10-17,19,20


Outline Drawing

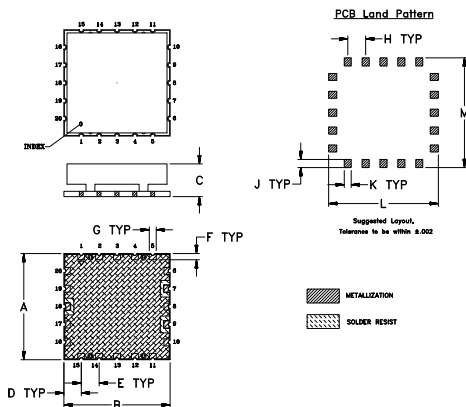

Outline Dimensions (inch mm)

A	B	C	D	E	F
1.200 (30.48)	1.200 (30.48)	.370 (9.40)	.196 (4.98)	.202 (5.13)	.071 (1.80)
G	H	J	K	L	M
.079 (2.01)	.202 (5.13)	.091 (2.31)	.079 (2.01)	1.240 (31.50)	1.240 (31.50)
wt					grams
					8.5

Demo Board MCL P/N: TB-563+ Suggested PCB Layout (PL-228)

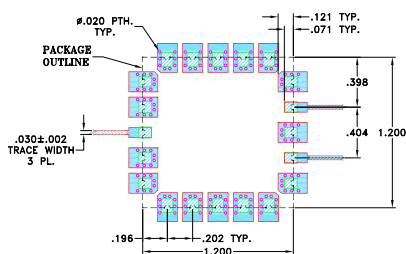

NOTES:
1. TRACE WIDTH IS SHOWN FOR OAK WITH DIELECTRIC THICKNESS .022"±.002". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- Low insertion loss
- 75Ω Impedance
- Combination of Low pass and High pass filters
- Miniature shielded package
- Aqueous washable

Applications

- Satellite systems
- Multiband radio systems



CASE STYLE: HR1176

PRICE: \$14.95 ea. QTY (10)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	Low Pass	DC-120	-	0.9	dB
		High Pass	160-1200	-	0.9	dB
	Return Loss	Low Pass	DC-120	14	19	-
		High Pass	160-1200	10	12	-
		Common	DC-120	14	18	-
Stop Band Isolation		Low Pass	160-1200	20	48	-
		High Pass	DC-120	25	50	-

Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)			RETURN LOSS (dB)	
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
1	0.04	76.15	34.98	41.72	0.05
15	0.08	54.17	36.84	38.58	0.00
40	0.16	50.24	32.35	42.91	0.02
80	0.33	55.01	22.76	22.61	0.20
120	0.87	58.72	32.30	25.89	0.64
126	1.15	39.79	20.87	21.66	0.76
134	2.44	24.93	13.76	10.62	1.06
136	3.44	19.61	12.83	7.83	1.27
138	5.60	13.24	10.51	4.96	1.77
140	9.59	8.33	8.11	2.81	2.75
142	15.45	5.41	7.15	1.70	4.16
144	22.19	3.79	7.50	1.24	5.75
148	32.08	2.16	10.10	0.88	9.28
150	34.91	1.73	11.94	0.78	11.22
154	40.95	1.23	16.38	0.63	15.36
160	51.57	0.89	25.19	0.49	21.71
225	56.18	0.40	22.09	0.25	23.19
300	59.91	0.31	31.58	0.29	33.03
500	54.25	0.47	14.18	0.32	14.27
700	55.47	0.71	12.18	0.14	12.26
1000	55.65	0.43	19.14	0.03	20.36
1200	61.82	0.51	25.29	0.16	23.23

Functional Schematic

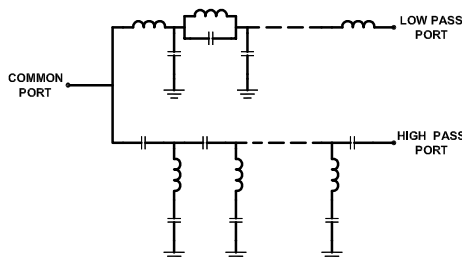

Mini-Circuits®

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site



Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M134453
EDU1439
TDP-122-75+
URJ
111230
Page 2 of 3

