




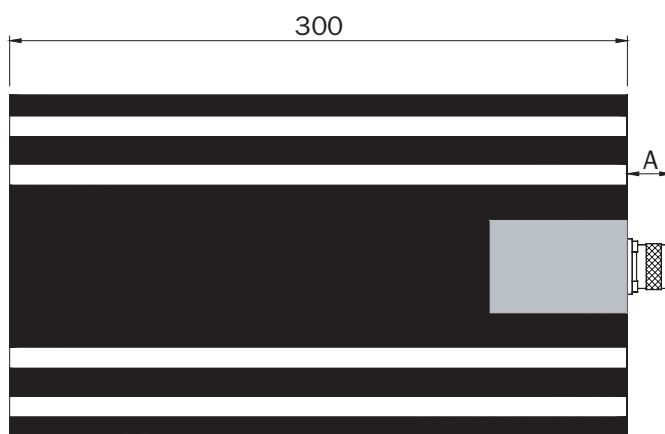

Standards
NF C 96-315
MIL-DTL-39030

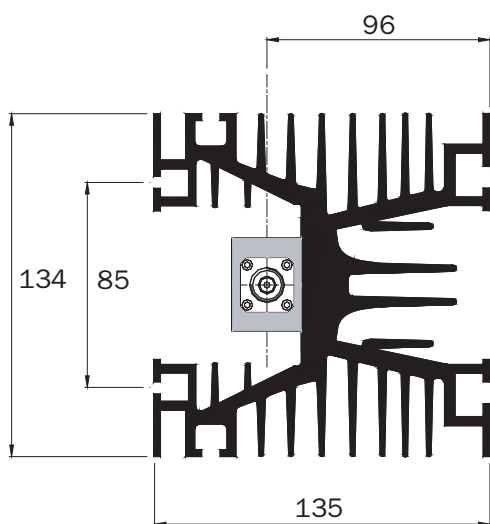

Impedance	$50 \Omega \pm 5\%$
Frequency	DC - 1 GHz
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	400 W
Peak power	40 kW
Weight	4.2 kg



Dimensions in mm

P/N	Connector	A
17-0205	N m	21
17-0259	N f	19
17-0292*	N f	19
17-0389**	N f	19
17-0155	7-16 f	32

* with thermoswitch 120°C

** with thermoswitch 90°C

Option VSWR ≤ 1.05 470 to 860 MHz for digital applications