



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: IF SAW Filter 110.592 MHz

TST Parts No.:TB0197A

Customer Parts No.:_____

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Andy Lee

Approval by:_____ Francis Chen

Date:_____ 2003/10/1



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

IF SAW Filter 110.592 MHz SMD 9.1X7.1mm

MODEL NO.: TB0197A

REV. NO.1

A. MAXIMUM RATING:

1. Input Power Level: 0 dB_m
2. DC voltage: 10 V
3. Operating Temperature: -10°C to +50°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. Characteristics :



Characteristics	Specification	Note
Center frequency F_c (MHz)	110.592	1
I.L. (Within $F_c \pm 3.1$ MHz) (dB)	12.0 max.	
Pass band BW_{3dB} (MHz)	1.0 min.	1
Group Delay Variation within $F_c \pm 500$ KHz	300ns max.	
Attenuation:(Reference level from 0 dB) (dB)		
$F_c - 4.608$ MHz to -1.960 MHz	45 dB min	1
$F_c - 1.960$ MHz to -1.738 MHz	35 dB min	
$F_c - 1.738$ MHz to -1.223 MHz	13 dB min	
$F_c - 1.223$ MHz to -1.185 MHz	12 dB min	
$F_c + 1.185$ MHz to $+1.223$ MHz	12 dB min	
$F_c + 1.223$ MHz to $+1.738$ MHz	13 dB min	
$F_c + 1.738$ MHz to $+1.960$ MHz	35 dB min	
$F_c + 1.960$ MHz to $+4.608$ MHz	45 dB min	
Impedance at F_c ; Input $Z_{IN} = R_{IN} // C_{IN}$	2400 Ω // 10.7pF	2
Output $Z_{OUT} = R_{OUT} // C_{OUT}$	2000 Ω // 11.5pF	2

Note1. The standard definitions is in JIS C 6703

Note2.

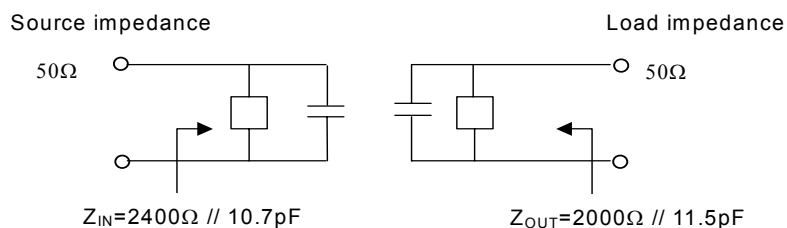


C. Frequency Characteristics :

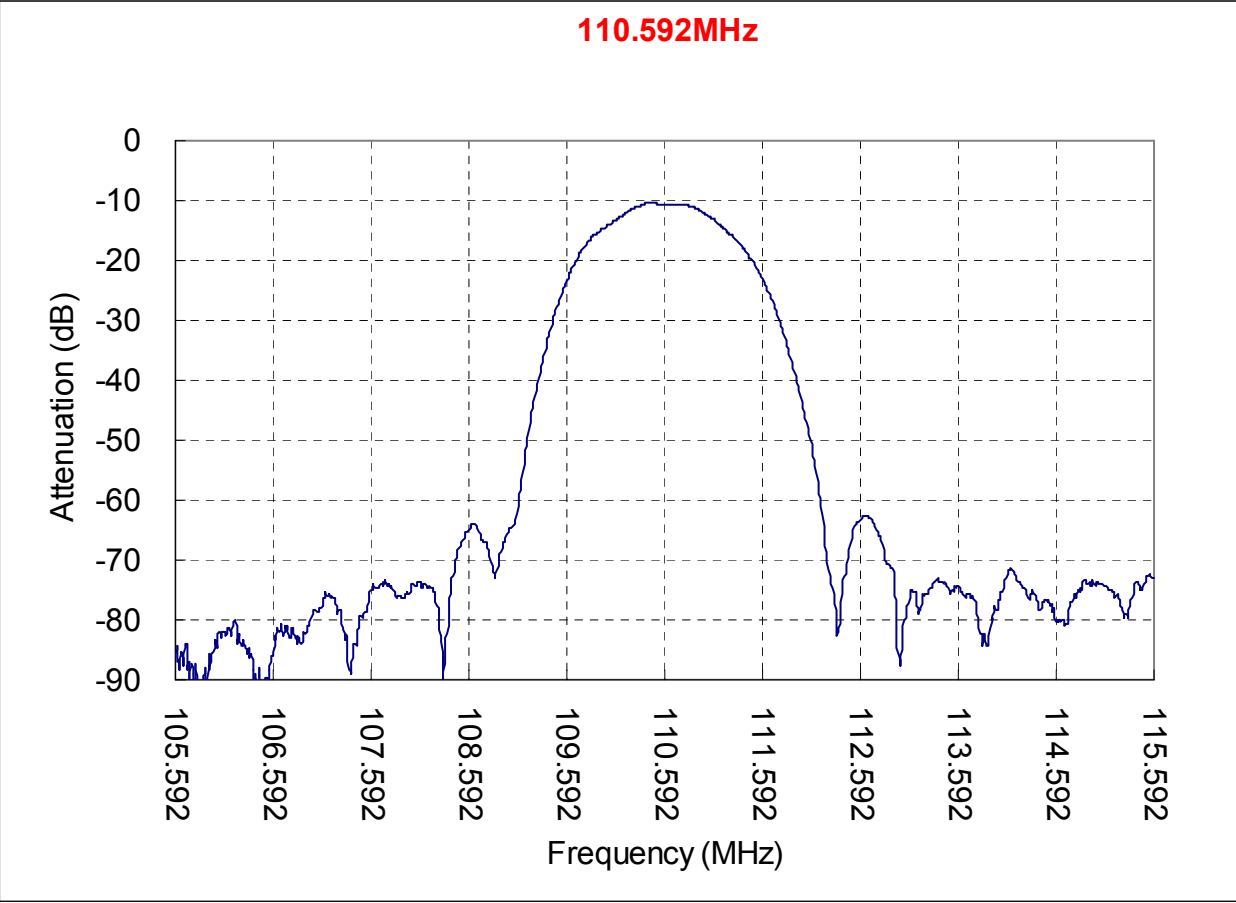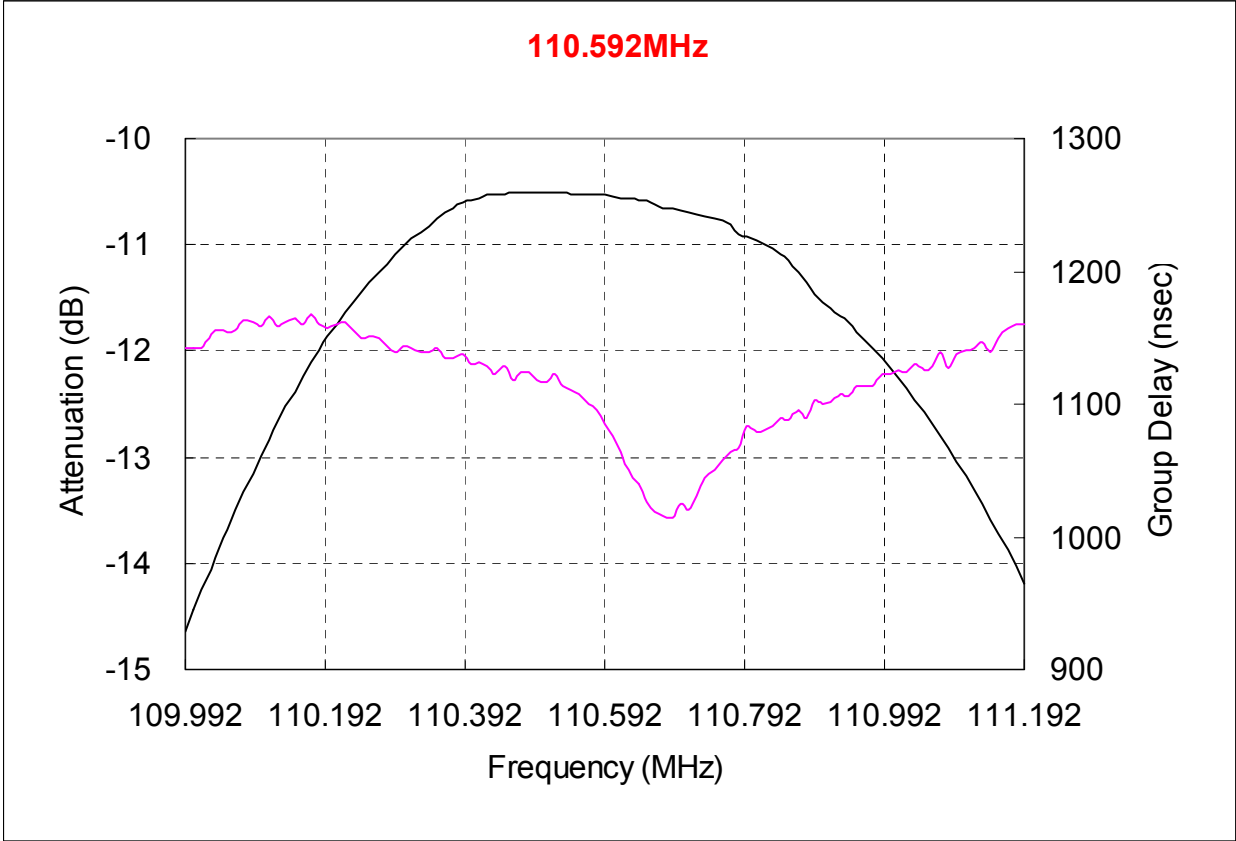


D. Measurement Circuit:

HP Network analyzer

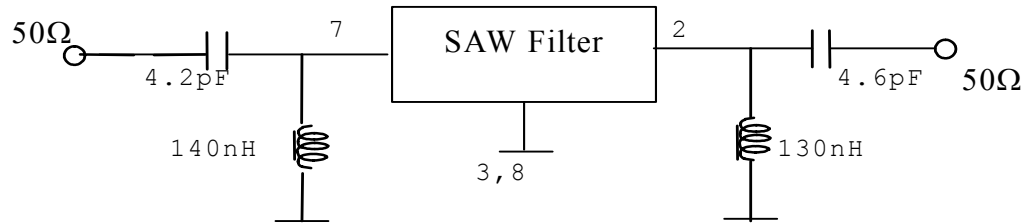

E. Outline Drawing:

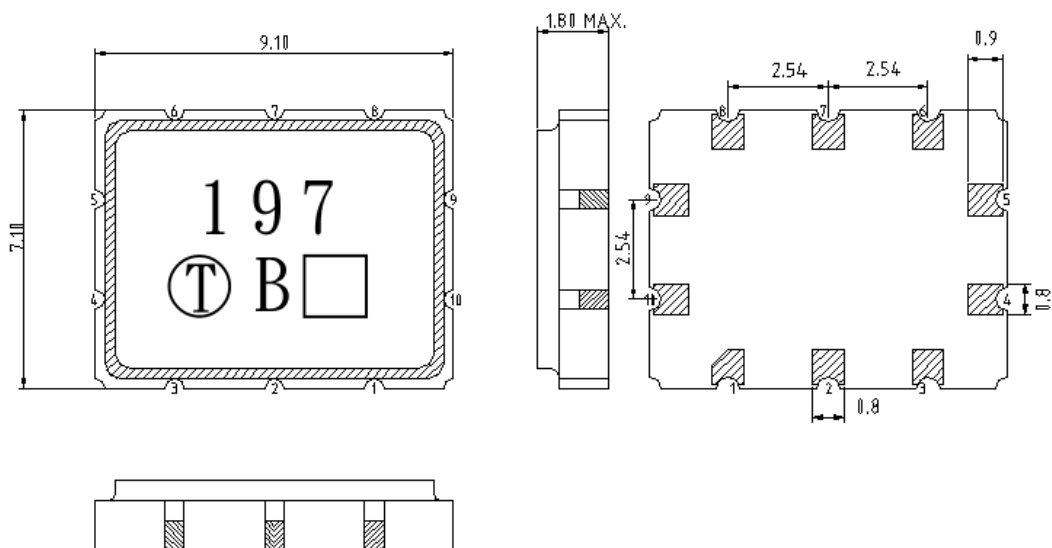

Pin 7: RF Input

Pin 8: Input ground

Pin 2: RF Output

Pin 3: Output ground

Pin 1, 4, 5, 6, 9, 10: To be ground

Unit : mm