


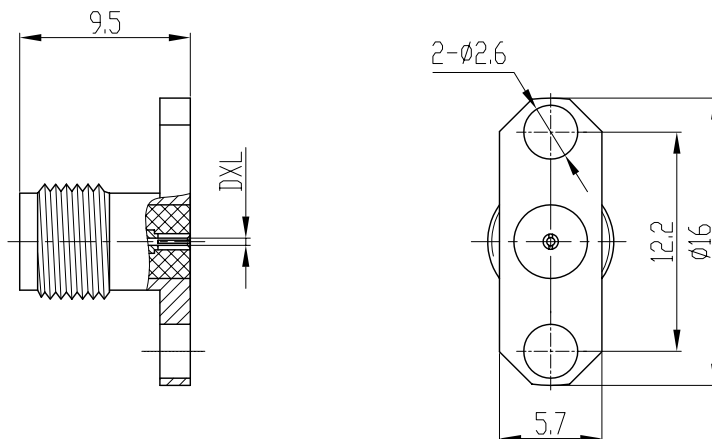

产品型号 type	D	L	备注 remark
SMA-KFD72	$\phi 0.4^{+0.06}_{-0.02}$	3.0	mate pin(适配插针 $\phi 0.4^{+0.01}_{-0.02}$)
SMA-KFD92	$\phi 0.9^{+0.06}_{-0.02}$	3.0	mate pin(适配插针 $\phi 0.9^{+0.04}_0$)
SMA-KFD331G	$\phi 0.5^{+0.08}_{-0.05}$	3.5	mate pin(适配插针 $\phi 0.5^{+0.03}_{-0.02}$) body, stainless steel(不锈钢壳体)

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 2.0 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1000V
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 2.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1000V
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium. gold plated
- Body: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

		SCALE	SMA-KFD92 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X$\pm$.15 $\pm 1^\circ$.XX$\pm$.05 .XXX$\pm$
		2.5:1		
NAME	DATE			
DRAWN				
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.