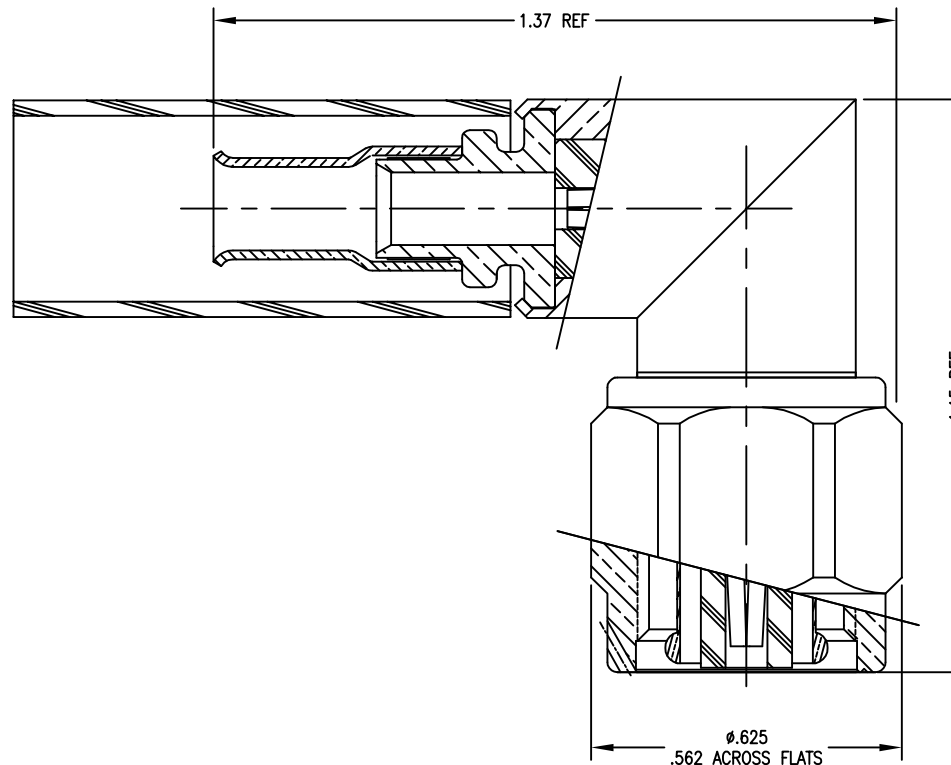


|                         |         |           |
|-------------------------|---------|-----------|
| DWG NO.<br>OL-0502-17-1 |         | REV.<br>1 |
| PART NUMBER             | BODY    | CONTACT   |
| 0502-17-AH              | ALBALOY | GOLD      |
|                         |         |           |

PLATING PER SAN-TRON SPEC. 7.3.1-8

- |                                   |                                       |                               |
|-----------------------------------|---------------------------------------|-------------------------------|
| 1.0 PERFORMANCE (see level)       | 2.0 MATERIALS                         | 3.0 FINISH: SEE TABLE         |
| 1.1 FREQUENCY RANGE: DC-6 GHz     | 2.1 CONTACTS: BeCu                    | 4.0 MECHANICAL                |
| 1.2 VOLTAGE RATING: 500 Vrms      | 2.2 BODY: BRASS                       | 4.1 INTERFACE REF MIL-STD-348 |
| 1.3 NOMINAL IMPEDANCE: 50 OHMS    | 2.3 DIELECTRIC: PTFE                  | 4.2 CRIMP TOOL: .213 HEX      |
| 1.4 DWV: 1500 Vrms @ 60 Hz        | 2.4 RETAINING RING: BeCu              |                               |
| 1.5 TEMPERATURE RANGE: -65/+165°C | 2.5 GASKET: Si RUBBER                 |                               |
|                                   | 2.6 CRIMP FERRULE: Cu                 |                               |
|                                   | 2.7 HEAT SHRINK: DUAL WALL POLYOLEFIN |                               |

[illegible]