


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

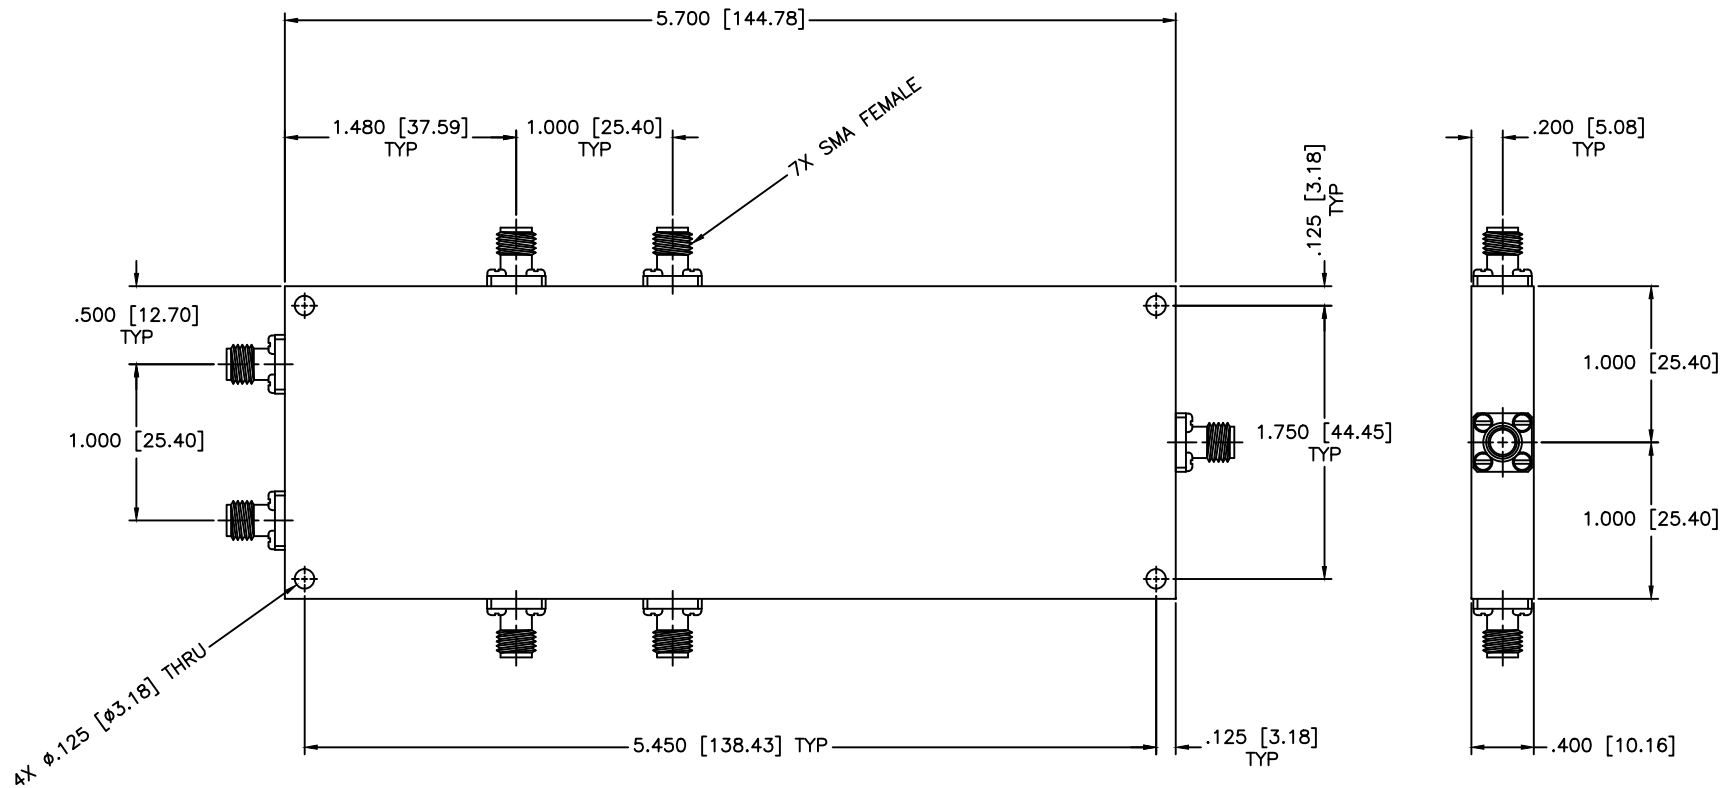

SPECIFICATIONS

Frequency Range: 0.5–1GHz
 Insertion Loss: 1.2dB Max.
 Isolation: 16dB Min.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 0.4 dB Max.
 VSWR In/Out: 1.55:1/1.35:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .008$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 6-WAY POWER DIVIDER			
		PART NO. PS6-1-T			
DRAWN: Paiboon Luekhamhan		DATE: 11-01-1997		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 11-01-1997		SIZE: N/A DO NOT SCALE THE DRAWING	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV: N/A		DWG NO. 80838	