


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

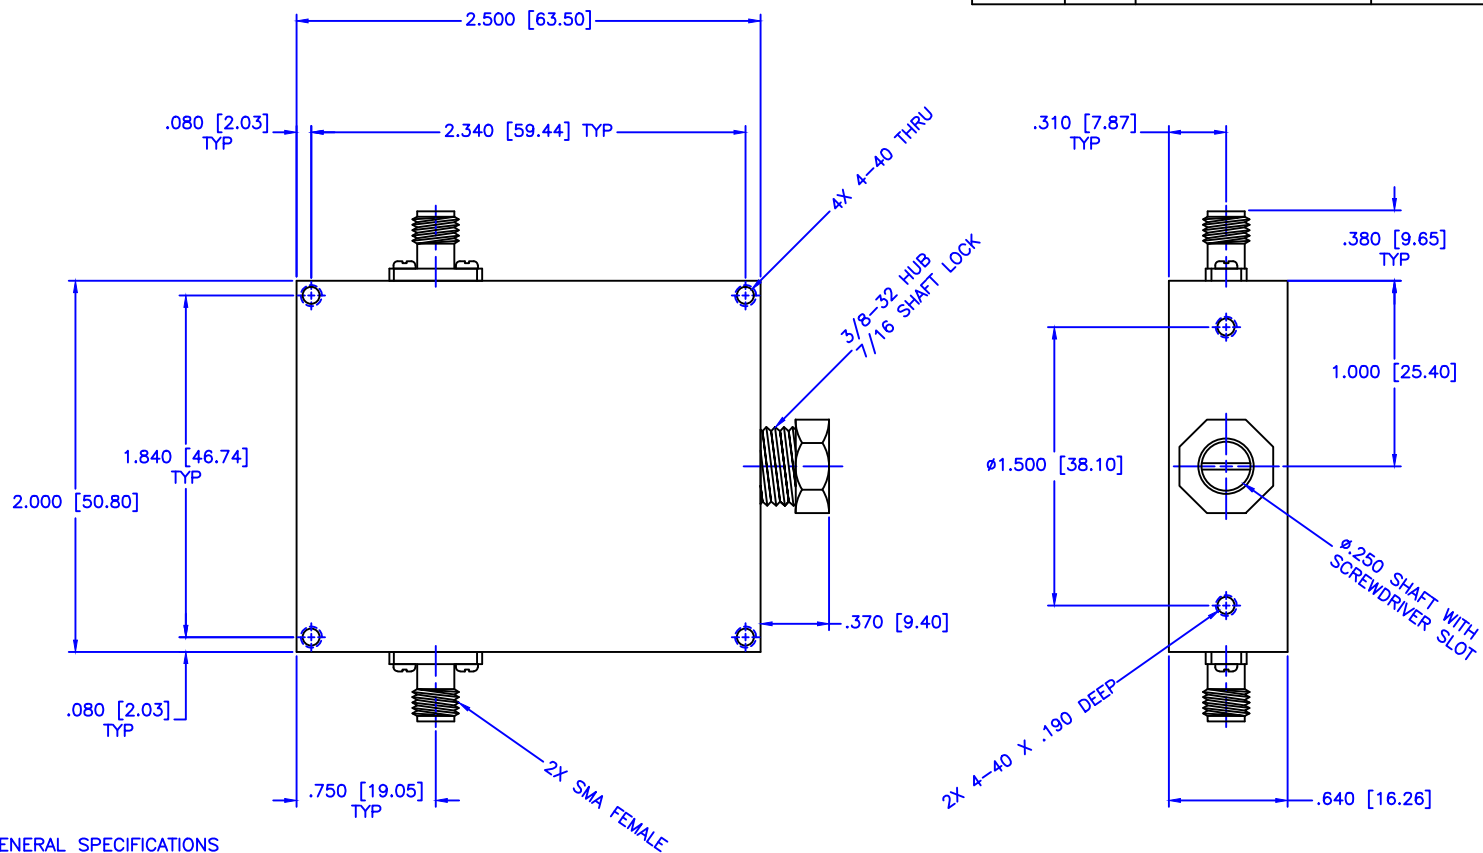

GENERAL SPECIFICATIONS

Frequency Range: 2-4 GHz
Attenuation: 20dB
Flatness: ± 1.5 dB
VSWR: 1.50:1 Max.
RF Power: 7W average, 3kW peak

Mechanical
Body: Aluminum
Connectors: Stainless Steel
Finish: Unique corrosion resistant 316 stainless steel epoxy coating IAW MIL-F-14072

Environmental
Operating Temperature: -55°C to +110 °C
Shock: 15 G's, 11ms, 1/2 sine
Vibration: 3 G's overall
Altitude: 40,000ft. Survival 25,000ft Operating

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
DRAWING TITLE:		FREQUENCY FLAT, ATTENUATOR			
PART NO.		CA16-20			
CAGE CODE:		SIZE: A		REV: A	
DWG NO.		86476			
DO NOT SCALE THE DRAWING					

DRAWN:	DATE:	PROPRIETARY NOTICE:
Pai boon Luekhamhan	11-27-2013	THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)
APPROVED:	DATE:	THIRD ANGLE PROJECTION
T. Nguyen	11-27-2013	