

DO NOT SCALE DRAWING

1.0 PERFORMANCE

- 1.1 VOLTAGE RATING: 1,000 Vrms
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 DWV: 2,500 Vrms, 60 Hz (sea level)
- 1.4 TEMPERATURE RANGE: -65 TO +165°C

2.0 MATERIALS


- 2.1 DIELECTRIC: PTFE
- 2.2 CENTER CONTACT MALE: BRASS
- 2.3 CENTER CONTACT FEMALE: BeCu
- 2.4 ALL OTHER METAL PARTS: BRASS
- 3.0 FINISH: SEE TABLE
- 3.1 RoHS CERTIFIED

4.0 MECHANICAL

- 4.1 INTERFACES PER MIL-STD-348
- 4.2 DURABILITY 500 CYCLES

DWG NO. OL-0410-20-1		REV. A
PART NUMBER	BODY	CONTACT
0410-20	NICKEL	GOLD/Cu


PLATING PER SAN-TRON SPEC. 7.3.1-8

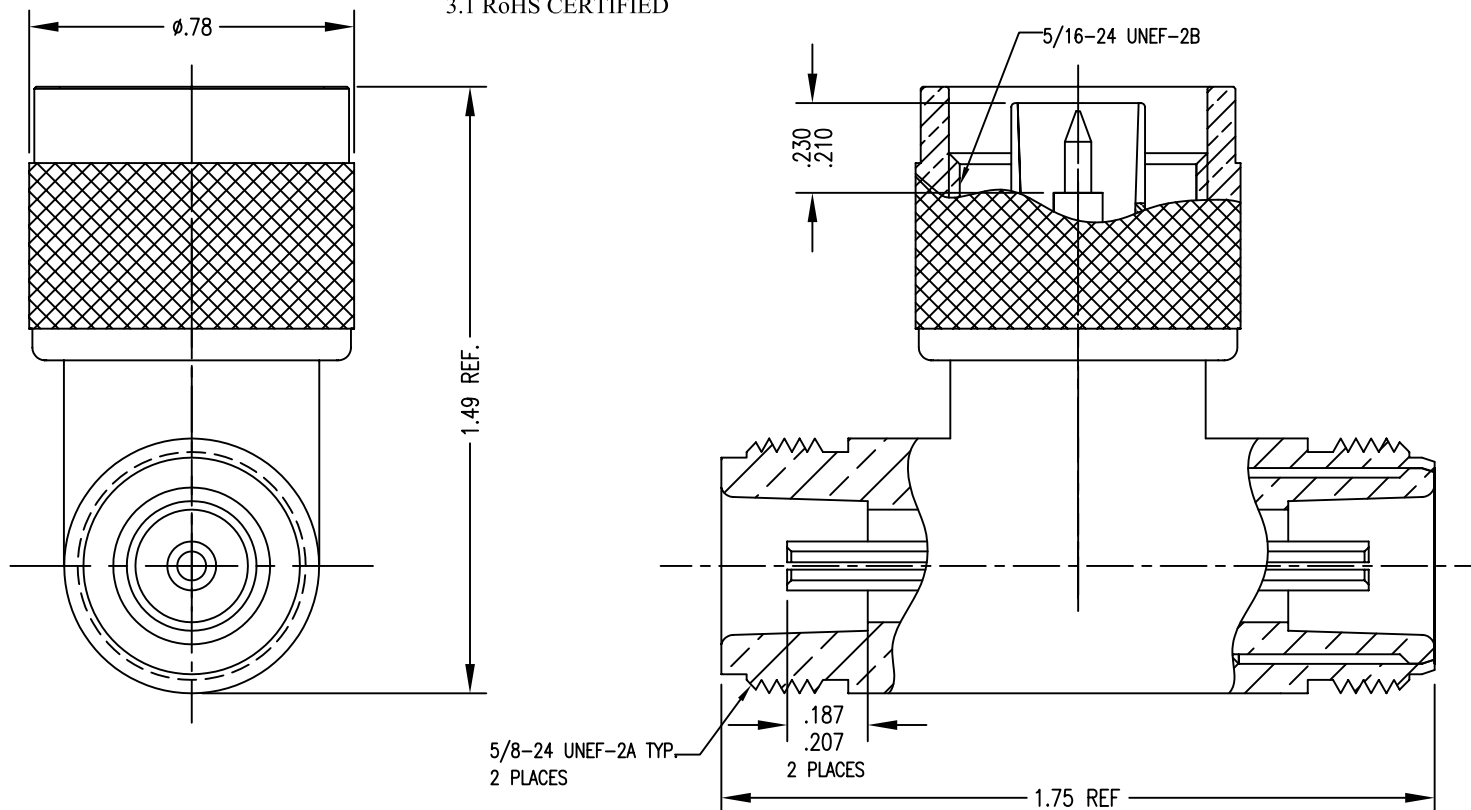

Rev.	Revisions	Disp.	Date	Dwn.	Appd.
A	ORIGINAL RELEASE	NEW	7/19/07		
Ref.:	SK	REMOVE ALL BURRS AND SHARP EDGES .005 MAX.	INTERPRET PER ASME Y14.5M-1994		

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON INCORPORATED.

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES.
ALL DIMENSIONS ARE AFTER PLATING.
.XXX= ±.005 ALL MACHINED SURFACES $\sqrt{3}$ MAX.
.XX= ±.01 ANG. ±1/2° FRACTIONAL= ±1/64
[Symbol] .004 MAX. TIR [Symbol] AXIS .001



THIRD ANGLE PROJECTION

DWN	DVP	7/19/07
CHKD	SJS	/
APPR	FSH	/



SAN-TRON, INC.

4 NEWBURYPORT TPK. IPSWICH MA USA 01938

TEL: 978 - 356 -1585 FAX: 978 - 356 -1573

WWW. santron.com E MAIL: santron@santron.com

TITLE
ADAPTER, TYPE N TEE

MATERIAL: SEE NOTE 2 FINISH: SEE TABLE

CAGE CODE: 50896	DWG NO. OL-0410-20-1	REV. A
SCALE X:X		