


产品型号
mounting hole

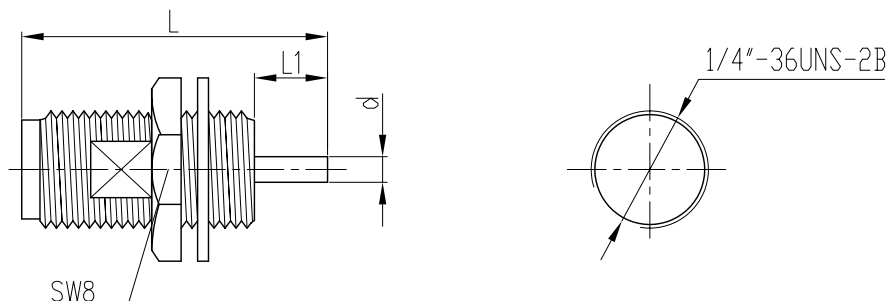

产品型号 type	L	L1	d	备注 remark
SMA-KYD5	24.9	2.9	Ø1.3	
SMA-KYD18	15.6	3.0	Ø0.5	无螺母、无垫圈 no nut and washer
SMA-KYD22	12.0	1.5	Ø1.0	无螺母、无垫圈 no nut and washer
SMA-KYD20	18.0	2.0	Ø1.3	
SMA-KYD32	25.7	13.0	Ø2.0	双螺母 double nut
SMA-KYD34	16.7	2.0	Ø1.3	
SMA-KYD35	19.5	2.5	Ø1.3	无螺母、无垫圈 no nut and washer

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1000V
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1000V
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium, gold plated
- Body: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

 	SCALE		SMA-KYD5 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	2.5:1			
NAME	DATE			
DRAWN				
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.