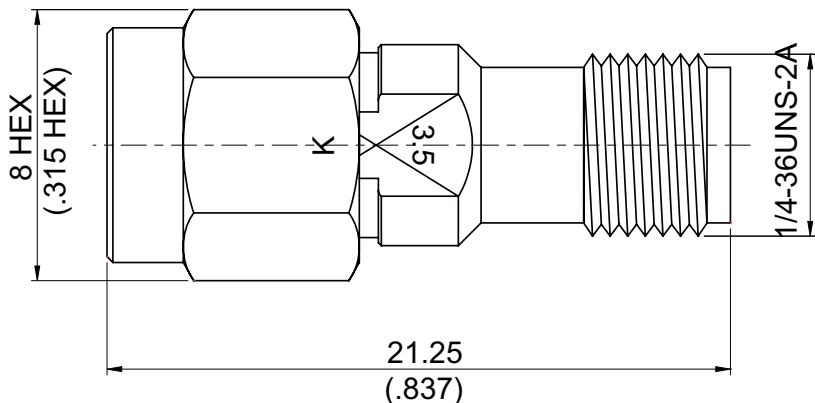


ADS-K3PC8	K Plug To 3.5 Jack	50Ω																					
																							
NOTE: VSWR 1.25 UP TO 33 GHz.																							
<table><tr><th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr><tr><td>Retainer Ring</td><td>Beryllium Copper</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Gasket</td><td>Silicon</td><td></td></tr><tr><td>Contact Pin</td><td>Beryllium Copper</td><td>Gold 20 Over Nickel 50 Over Copper 50</td></tr><tr><td>Insulator</td><td>P.P.O</td><td></td></tr><tr><td>Body</td><td>Stainless Steel</td><td>Passivated</td></tr><tr><td>Coupling Nut</td><td>Stainless Steel</td><td>Passivated</td></tr></table>			Parts	Material	Plating (Micro-inch)	Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Contact Pin	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50	Insulator	P.P.O		Body	Stainless Steel	Passivated	Coupling Nut	Stainless Steel	Passivated
Parts	Material	Plating (Micro-inch)																					
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Gasket	Silicon																						
Contact Pin	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50																					
Insulator	P.P.O																						
Body	Stainless Steel	Passivated																					
Coupling Nut	Stainless Steel	Passivated																					
Weight:																							

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.